AFOLUX GEN II Panel PC

New flat bezel, multi-touch, wide voltage AFOLUX panel PC

From the heritage of affordable Luxury AFOLUX Panel PC, AFOLUX II Panel PC shows it's spirit to exceed the history. The AFOLUX II Panel PC is slim and stylish and provides two types of touch option. RFID reader, wide voltage power input are its features which make it more flexible and more powerful than ever!

New

Innovative product design:

- AFOLUX II flat bezel design is thinner than AFOLUX
- Projected capacitive multi-touch and resistive single touch screen options

New technology and multiple functions:

- LED dash system for eye-catching notification
- Integrated EM/ Mifare RFID reader
- Light fanless temperature management
- 9 V ~36V DC wide voltage input fits all power requirements
- IEI Light Fanless technology allows the system to turn on/off fan automatically, enhancing system stability.
- Exclusive LED Light Bar Simulation displays light signals

Hospital

- Machine for doctor review
- Reception
- Self-service kiosk



Public Space

- Ticket machines
- Information kiosks
- Introduction machines

Factory

- Steelworks
- Product line
- Ice factory
- Ski resort

Airport

- Self-check in
- Advertising machines
- Routing information guide machine

2013 New AFOLUX GEN II at a Glance

New

Platform	W7"	8"	W10.2"	10.4"	12.1"	15"	W15.6"	17"	W18.9"	W21.5"
Intel® Atom™ N2600 / N2800	AFL2-W07A-N26	AFL2-08A-N26	AFL2-W10A-N28	AFL2-10A-N28						
Intel® Atom™ N270							AFL2-W15A-N270			
Intel® Atom™ D525					AFL2-12A-D525					
Intel® HM65					AFL2-12A-HM65					
Intel® H61						AFL2-15A-H61	AFL2-W15B-H61	AFL2-17A-H61	AFL2-W19A-H61	AFL2-W21A-H61

Rugged while Stylish

Flat Bezel Design with IP64 Protection

AFOLUX II series is designed in flat bezel panel and against dust and water, enduring flawless operation.

Flat-bezel Features:

- Better visual effects
- No edge effect
- Sleek and stylish
- Easy to clean

Enhanced touch technology – projected capacitive touch

Projected capacitive touch panel is stronger and with higher transparency than the resistive type touch panel. It also supports Windows 7 multi-touch function compatible with glove-wearing users and enhancing ease-of-use.

Model	AFL2-17A-H61/PC	AFL2-17A-H61/R
Type of Touch	Projected capacitive type	5-wire resistive type touch
Touch Function	Multi-touch	Single-touch
Transparency	85%	78%
Hardness	≥6H	≥3H
Input Flexibility	Hand/ glove	Hand/ glove/ stylus

Glove-friendly multi-touch

6H Anti-scratch Surface (Projected capacitive type touch screen)

Projected capacitive touch technology utilizes a durable glass front surface. 6H hardness is stronger than the conventional touch panel and therefore is able to protect the screen from damage.

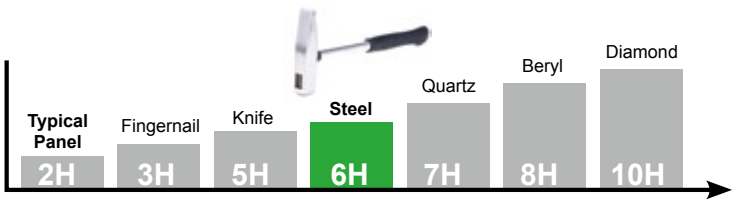

MOH's Hardness Rating

Superior Performance

The Best C/P Value Intel® H61 Platform

Comparing to mobile solution, Intel® H61 with desktop CPU provides low power consumption but high performance.

Mobile 2nd Core i3 V.S. Desktop Pentium & 2nd Core i3

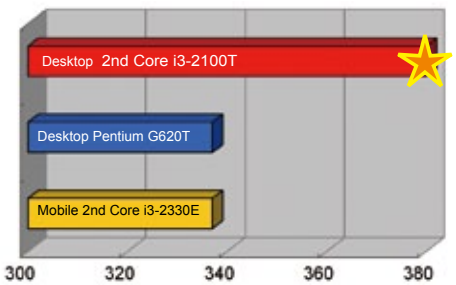

CPU Performance (CPUMark 99)

CPU Type	Intel® 2nd Core™ i3-2330E (Mobile 35W CPU)	Intel® Pentium® G620T (Desktop 35W CPU)	Intel® 2nd Core™ i3-2100T (Desktop 35W CPU)
CPU Performance (CPUMark 99)	337	337	380

Mobile Celeron V.S. Desktop Celeron

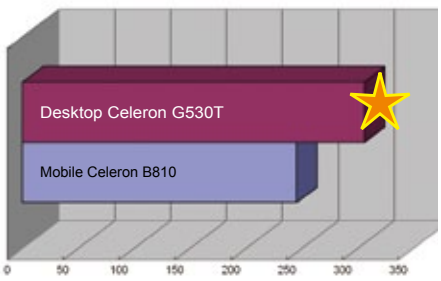

CPU Performance (CPUMark 99)

CPU Type	Intel® Celeron® B810 (Mobile 35W CPU)	Intel® Celeron® G530T (Desktop 35W CPU)
CPU Performance (CPUMark 99)	245	306

Better performance with Intel® Atom™ Cedarview dual core processor

AFOLUX II Cedarview panel PC integrates with Intel dual core processor running with DDR3 memory. With fanless system, it reduces system noise and dust accumulation.

N2600 CPU performance is 31% better than N270,
Graphics performance is 36% better than N270,
Memory performance is 21% better than N270

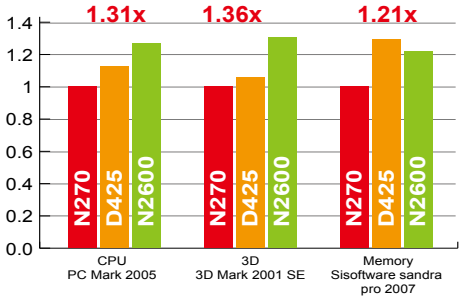

Secondary Display on Full HD

Latest Display Technology: HDMI

HDMI is a compact audio/video interface for transferring uncompressed digital video data and compressed/uncompressed digital audio data from an HDMI-compliant device to a compatible digital audio device, computer monitor, video projector, or digital television. HDMI is a digital replacement for existing analog video standards.

	Maximum clock rate(MHz)	Maximum total TMDS throughput(Gbit/s)	Maximum color depth (bit/px.)	Maximum resolution over single link at 24-bit/px	Dolby TrueHD bitstream capable	3D over HDMI
Version 1.0 to 1.2	165	4.95	24	1920 x 1200	No	No
Version 1.3	340	10.2	48	2560 x 1600	Yes	No
Version 1.4	340	10.2	48	2096 x 2160	Yes	Yes

Advantages

- Backward compatible with DVI via an adapter.
- Support audio transport (v.s. DVI canonly transmit image).

Latest Display Technology: DisplayPort

It's not only used to connect a video source to a display device, but also be used to transmit audio, USB, and other forms of data. DisplayPort lets you take advantage of today's high-bandwidth content, enabling you to create a professional and powerfully compelling digital signage solution.

Reception

Hospital-Medical Imaging

Advantages

- Backward compatible with DVI/HDMI with the adapter.
- Support multi-display: It can works with monitors, notebooks or all-in-one computers.

Faster Transmission

10x Faster Transmission: USB 3.0

The AFOLUX II PPC supports both USB 2.0 and USB 3.0. USB 3.0 has higher transmission speed and wider data bandwidth and supports faster transferring for the user.

Data Rate Comparison

USB version	USB1.0	USB2.0	USB3.0
Data Transfer Rate	12Mbps	480Mbps	5Gbps
Media (Data Size)	**Transfer Time**		
Song / Pic (4 MB)	5.3 sec	0.1 sec	0.01 sec
HD-Movie (25 GB)	9.3 hr	13.9 min	70 sec

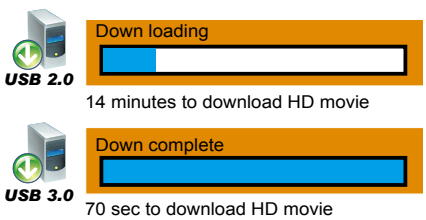

Wi-Fi 2T2R Wireless LAN

The AFOLUX II integrates a PIFA antenna and provides 802.11n 2T2R wide bandwith wireless communication.

T: Transmitter: the number T is absolutely relative with speed, 1T up to 150Mbps, 2T up to 300Mbps

R: Receive: the number R is relative with receiving dead angle and distance. The higher R is, the wider the receiving range.

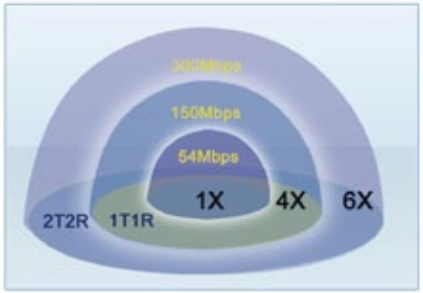

Easy to Use

LED Indicator and Function key

- Function key can be more convenient for panel PC users to operate this panel without any keyboard or mouse.
- Indicator is located in front of panel, it can tell users which function is enable or disable

• LED Indicators

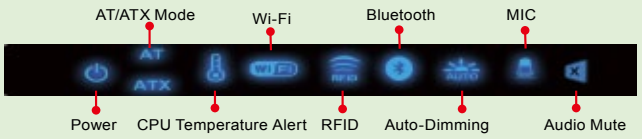

- Brightness of LED indicator can be set by manual (3-step) or auto-adjust by ambient light (new function support from AFL2-xxA-N26 R11, AFL2-xxA-N28-R11, AFL2-xxA-H61 R12, AFL2-W21A-H61 R10)

• Function Key

Fn Fn
Backlight On/Off
Audio -
Audio +
Brightness -
Brightness +

Fn + RFID Enable/Disable
Fn + Audio Mute
Fn + Camera Enable/Disable
Fn + Front Side USB Enable/Disable
Fn + Power On / Off

Mini USB 2.0 Port & microSD Card Slot on Front Panel

Mini USB 2.0

The AFOLUX GEN II new series has a mini USB 2.0 port on the front panel for easy connecting.

MicroSD card

The AFOLUX GEN II new series has a microSD slot on the front panel for easier access.

Auto-dimming Advantages

Auto-dimming Advantages

- Power Consumption Saving
- Comfortable Viewing Brightness
- Extend Product Lifetime

Auto-dimming

Automatically adjust the optimal brightness to fit the environment.

Day: Higher Ambient Luminance

Night: Lower Ambient Luminance

Flexible Design to Fit Various Scenarios

Wide Application to Extreme Circumstance

Power supply requirement varies from applications. Incorrect voltage input will damage electronic components thus cause system break down. AFOLUX GEN II offers wide voltage power input, which fits different application scenarios and increase stability of the system.

Wide Range 9~36VDC input *

Wide range DC input fits different power source depends on what circumstance needed.

Wide Range Power Input	9~ 36V DC*



Automation Central Control

Factory Manufacture Control



Truck Control (24V)

Flexible Power Mode

With the AT mode selected, the AFOLUX II turns on automatically when the power is connected. With the ATX mode, the AFOLUX II can be easily controlled via network or a power switch

AT/ATX

AT Power Mode

Applications
- Factory Automation platform
- Self-service kiosk

Advantages
- Easy to turn on/off with panel mounting
- Automatic start when power connected

System On

System Off

ATX Power Mode

Applications
- Security surveillance
- Advertising terminal

Advantages
- Power management
- Remote control via network advantage
- Remote control individually

System On

System Off

Complete Peripherals

Optional EM/Mifare RFID Reader

EM card reader (125KHz):
It is called an ID card and has read/write function of contactless RFID chip with low consumption and can provide various data transmission rate and data encoding.

Mifare card reader (13.56MHz):
It is called an IC card and can be used to read and save the data information to implement certein data transmission.

100KHz	1MHz	100MHz	1GHz

		Low Frequency (125KHz)	High Frequency (13.56MHz)		
			ISO14443	ISO15693	Felica (NFC)
Data Rate		Up to 16 kbps	Up to 106 kbps Faster!	Up to 53 kbps	Up to 434 kbps
Reading Distance		0-200cm	0-10cm	0-150cm	0-10cm
Memory	R/O	48/64 bits	64 bits	64bits	64bits
	R/W	2048/1024 bits	512-4096 bits High Capacity!	Max. 2048 bits	N/A
Interfe-rence	Liquid	Low	Mid	Mid	Mid
	Metal	High	High	High	High
	RF	Very Low	Low	Low	Low
Security		32-bit password	High (AB keys)	Low	High (AB Keys)

Optional Magnetic Stripe Card/ Hybrid Card Reader

IEI provides a bracket kit option for users to secure either the MSR or MSI card reader, which both accept magnetic cards.

AFLP-xxxMSR-U

Magnetic Card Reader

AFLP-xxxMSI-U

- Magnetic Card
- IC Card
- iButton

Mounting Kits

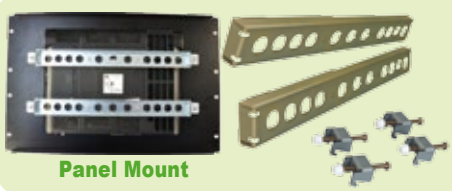
Panel Mount

V-Stand

Wall Mount

Stand

OSD Remote Control Advantage

Advantages
- Convenient way to control visual setting
- Control the system from a distance
- Extend Product Lifetime



IEI Light Fanless System



IEI Light Fanless System is a highly effective smart system, embedded with a smart sensor to sense the ambient temperature. It can operate quietly with high performance in various applications, such as a patient's bedside multimedia platform, gaming machines, airport kiosks etc.

Benefits

- **Power Saving**
  Auto switch on/off fan can reduce redundant power consumption
- **Expanding system lifecycle**
  Helping users to run system more effectively, it also enhances the lifecycle of CPU.
- **Effectively manage system environment**
  User can monitor the information of the system easily
- **High performance with noiseless**
  IEI supports noiseless situation to have quiet environment and high performance simultaneously.

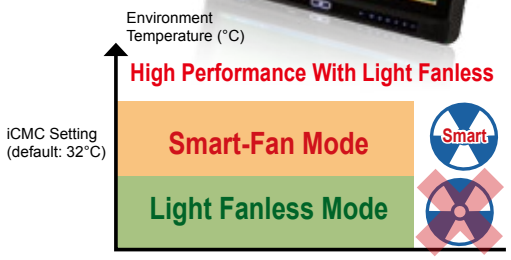

IEI Light Fanless Applications

Patient Bedside Entertainment System

Clean Room

Semi-outdoor Kiosk

iCMC (IEI Cooling Management Console)

iCMC, IEI's exclusive software, provides reliable embedded features for system integrators. It simplifies integration for the AFOLUX II and upgrades system configuration from the BIOS level to the operating system level.

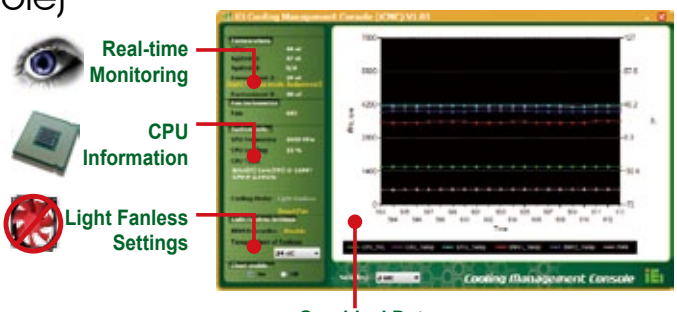

LED Light Visual Management

Features

- Programmable LED RGB colors
- Signaling light display user demand
- Manual scripts for LED lighting programs
- 100% software programmable colors, light duration, and light patterns
- 30 light sections for AFL2-17A-H61, 34 light sections for AFL2-W19A-H61 50 light sections for AFL2-W21A-H61, each light section can be configured independently.

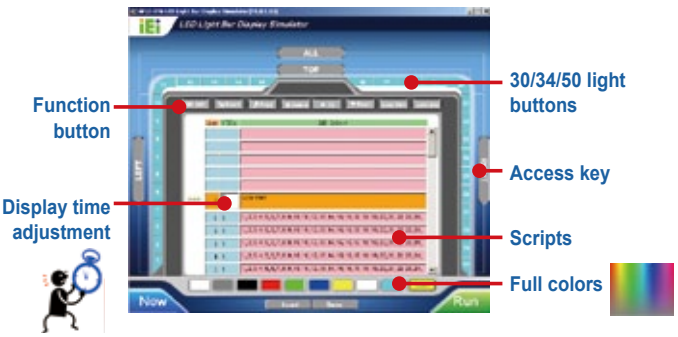

Support LED Light Bar control API for the customer to suit their own software program. Light bar signal are correspond to the light button. User can customize their own light patterns for different conditions.

LED Dash Board for Visual Visual Alert System and Status Notification

Achieving a smooth production line

Medical care alert system

Showing appealing light simulation

AFOLUX GEN II 7"~10" Selection Guide

	Model	AFL2-W07A-N26	AFL2-08A-N26	AFL2-W10A-N28	AFL2-10A-N28
LCD Specifications	Size	Wide 7”	8''	Wide 10.2”	10.4”
	Resolution	800 (W) x 480 (H)	800 (W) x 600 (H)	1024 (W) x 600 (H)	800 (W) x 600 (H)
	Brightness (cd/m²)	400 cd/m²	250 cd/m²	400 cd/m²	400 cd/m²
	Contrast Ratio	500:1	500:1	400:1	700:1
	LCD Color	262K/16.2M	16.2 M	262K	262K/16.2M
	Pixel Pitch (mm)	0.1905(H) x 0.1905(V)	0.2025(H) x 0.2025(V)	0.2175(H) x 0.2175(V)	0.264 (H) x 0.264 (V)
	Viewing Angle (H-V)	160°(H) / 160°(V)	140°(H) / 130°(V)	140°(H) / 120°(V)	160°(H) / 140°(V)
	Backlight MTBF	50000 hrs (LED backlight)	30000 hrs (LED backlight)	30000 hrs (LED backlight)	30000 hrs (LED backlight)
Touch	Touch Screen	5-wire rsistive type with RS-232 interface			
	Touch Controller	PenMount DMC9000			
System	CPU	Intel® Atom™ N2600 dual core 1.6 GHz CPU		Intel® Atom™ N2800 dual core 1.86 GHz CPU	
	Chipset	Intel® NM10			
	RAM	Support one 800 MHz 204-pin DDR3 SO-DIMM slot (max. 2GB) pre-installed wiith 2GB		Support one 1066MHz 204-pin DDR3 SO-DIMM slot (max. 4GB) pre-installed wiith 2GB	
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0			
	Audio Codec	Realtek ALC892 HD Audio codec			
	Storage	mSATA		2.5” SATA 2.0 HDD bay	
	Input / Output	1 × RS-232 COM Port (DB-9) 1 × PS-422/485 COM Port (RJ-11) 1 × GbE LAN (RJ-45) 2 × USB 2.0 2 × USB 3.0 1 × Audio jack 1 × Display port	1 x Mini USB 2.0 port on front panel 1 x MicroSD card slot on front panel 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x DC input jack	1 × RS-232 COM Port (DB-9) 1 × RS-232 COM Port (RJ-45) 1 × RS-422/485 COM Port (RJ-45) 1 × GbE LAN (RJ-45) 2 × USB 2.0 2 × USB 3.0 1 × Audio jack 1 x Display port	1 x Mini USB 2.0 port on front panel 1 x MicroSD card slot on front panel Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x DC input jack
Other Features	Audio	AMP 0.8 W + 0.8 W		AMP 1.5 W + 1.5 W	
	Camera	N/A		2M pixels with low light function	
	RFID Reader	EM 125 KHz or Mifare 13.56 MHz card reader (optional)			
	MSR Card Reader	MSR card reader (optional)			
	OSD Function	LCD on/off, brightness up/down, volume up/down,hotkey			
	Ambient Light Sensor	Yes			
	Infrared Remote Controller	Yes			
	System Cooling	Fanless			
Connectivity	Wireless	IEEE 802.11b/g/n 2T2R module (WIFI-RT5392-SB-R10)			
	Bluetooth	Bluetooth V2.0+EDR with USB interface (optional)			
Physical	Construction Front Panel	PC + ABS plastic front frame			
	Mounting	Wall, Panel, Stand, RACK Mounting and VESA 75 mm x 75mm			
	Color	Black			
	Dimensions (mm)	208 (W) x 158.5 (H) x 45.9 (D)	215 (W) x 188 (H) x 46 (D)	280 (W) x 198 (H) x 51(D)	282.5 (W) x 242.7 (H) x 51 (D)
	Weight (N/G)	1.12 kg / 2.08 kg	1.43 kg / 2.2 kg	2.5 kg / 4.02 kg	2.98 kg / 4.5 kg
Environment	Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 40°C		-20°C ~ 45°C	
	Storage Temperature (°C)	-20°C ~ 60°C			
	Humidity	10% to 95% (non-condensing)			
	IP Level	Front panel IP 64			
	Safety&EMC	CE / FCC			
Power	Power Supply	36W adapter Input: 90VAC~264VAC, 50/60 Hz, Output: 12VDC		60W power adapter, Input: 90VAC~264VAC, 50/60 Hz, Output: 12VDC	
	Power Requirement	9 ~ 36 VDC			
	Power Consumption	12V@2.27A (Intel® Atom™ N2600 CPU with 2GB DDR3 momory)	12V@2.27A (Intel® Atom™ N2600 CPU with 2GB DDR3 momory)	12V@2.35A (Intel® Atom™ N2800 CPU with 2GB DDR3 memory)	12V@2.75A (Intel® Atom™ N2800 CPU with 2GB DDR3 memory)

AFOLUX GEN II 12.1"~W15" Selection Guide

Model		AFL2-12A-D525	AFL2-12A-HM65	AFL2-W15A-N270	AFL2-15A-H61	AFL2-W15B-H61
LCD Specifications	Size	12.1"		Wide 15.6" TFT LCD	15" (4:3)	W15.6" (16:9)
	Resolution	1024 (W) x 768 (H)		1366 (W) x 768 (H)	1024 (W) x 768 (H)	1366 (W) x 768 (H)
	Brightness (cd/m²)	600		300	400	300
	Contrast Ratio	700:1		500:1	700:1	500:1
	LCD Color	16.2 M		16.7 M	262K/16.2M	16.7M
	Pixel Pitch (mm)	0.240 (H) x 0.240 (V)		0.252 (H) x 0.252 (V)	0.297 (H) x 0.297 (V)	0.252 (H) x 0.252 (V)
	Viewing Angle (H-V)	160° / 140°		170° / 160°	160° / 140°	170° / 160°
	Backlight MTBF	50000 hrs (LED backlight)		50,000 (LED backlight)	50,000 hrs (LED backlight)	50,000 hrs (LED backlight)
Touch	Touch Screen	5-wire rsistive type with RS-232 interface / projected capacitive type with USB interface				
	Touch Controller	PenMount DMC9000 (Resistive type) / EETI EXC7200 & EXC5400 (Projected capacitive type)				
System	CPU	Intel® Atom™ D525 1.8GHz dual core processor	2nd Generation Intel® Core™ i7/ i5/ i3 and Celeron® processor	Intel® Atom™ processor N270 1.6 GHz CPU	2nd/3rd Generation Intel® Core™ i7/i5/ i3 and Pentium® processors	2nd/3rd Generation of Intel®Core™ i7/ i5/i3 and Pentium® processors
	Chipset	Intel® ICH8M	Intel® HM65	Intel® 945GSE + ICH7M	Intel® H61	Intel® H61
	RAM	Support one 204-pin DDR3 SO-DIMM slot (max. 4GB)		Support one 400 MHz or 533 MHz DDR2 SO-DIMM (max. 2GB)	Support two 204-pin DDR3 SO-DIMM slot (max. 16GB) preinstalled with 4GB (2GB x 2)	Support two 204-pin DDR3 SO-DIMM slot (system Max. 16GB)
	Ethernet	Realtek RTL8111E PCIe GbE controller supports ASF 2.0				
	Audio Codec	Realtek ALC888 HD Audio codec				Realtek ALC892 HD Audio codec
	Storage	CF Type II socket 2.5" SATA 3Gb/s SSD bay mSATA	2.5" SATA 6Gb/s SSD bay mSATA	CF Type II 1 x 2.5" SATA HDD Bay	CF Type II 2.5" SATA 3Gb/s HDD bay	CF Type II socket
	Input / Output	1 x RS-232 (DB-9 connector) 1 x RS-232 (RJ-45 connector) 1 x RS-422/485 (4-pin box header) 2 x GbE LAN (RJ-45 connector) 4 x USB 2.0 1 x Mini USB 2.0 port on front panel 1 x Audio jack (line-out) 1 x VGA port (DB-15 connector) 1 x MicroSD card slot on front panel 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x 9 ~ 36V DC jack	1 x RS-232 (DB-9 connector) 1 x RS-232 (RJ-45 connector) 1 x RS-422/485 (4-pin box header) 1 x GbE LAN (RJ-45 connector) 2 x USB 2.0 2 x USB 3.0 1 x Mini USB 2.0 port on front panel 1 x Audio jack (line-out) 1 x HDMI port 1 x MicroSD card slot on front panel 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x 9 ~ 36V DC jack	1 x RS-232 COM port 1 x RS-232/422/485 COM port 1 x RJ-45 for GbE LAN 2 x USB 2.0 1 x Power switch 1 x Reset button 1 x Audio port (Line out) 1 x VGA 1 x Power jack 1 x External SATA 1 x 8-bit digital I/O, 4-bit input/4-bit output (optional)	2 x RS-232 (DB-9 connector) 1 x GbE LAN (RJ-45 connector) on left side 1 x RS-422/485 (RJ-45 connector) 1 x Type K 3 x USB 2.0 2 x USB 3.0 1 x Mini USB port on front panel 1 x MicroSD card slot on front panel 1 x Line out, MIC on left side 1 x VGA port 1 x HDMI port 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x 9 ~ 36V DC jack	2 x RS-232 (DB-9 connector) 1 x GbE LAN (RJ-45 connector) on left side 1 x RS-422/485 (RJ-45 connector) 1 x Type K 3 x USB 2.0 (two on the bottom, one on the left) 2 x USB 3.0 1 x Mini USB port on front panel 1 x MicroSD card slot on front panel 1 x Line out, MIC on left side 1 x VGA port 1 x HDMI port 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x 9 ~ 36V DC jack
Other Features	Audio	AMP 3W + 3W (internal speaker)		AMP 1.5 W + 1.5 W (internal speaker)	AMP 2W + 2W (internal speaker)	AMP 2W + 2W (internal speaker)
	Camera	1.3 megapixels with low light function		2 M pixels with low light function	2 M pixels with low light function	2 M pixels with low light function
	RFID Reader	EM 125 KHz or Mifare 13.56 MHz card reader (optional)				
	MSR Card Reader	MSR card reader (optional)				
	OSD Function	LCD on/off, brightness up/down, volume up/down, Hot Key				
	Ambient Light Sensor	Yes				
	Infrared Remote Controller	Yes				
	System Cooling	Fanless	Smart fan	Fanless	Light Fanless	Light Fanless
Connectivity	Wireless	IEEE 802.11b/g/n 2T2R module (WIFI-RT5392-SB-R10)		IEEE 802.11b/g/n 1T1R module (WMPCIE-V01-R30)	IEEE 802.11b/g/n 2T2R module (WIFI-RT5392-SB-R10)	
	Bluetooth	Bluetooth V2.0+EDR with USB interface (optional)		N/A	Bluetooth V2.0+EDR with USB interface (optional)	
Physical	Construction Front Panel	PC + ABS Plastic		PC + ABS plastic front frame	PC + ABS Plastic	PC + ABS Plastic
	Mounting	Panel, Wall, Rack, Stand and Arm VESA 100 mm x 100 mm		VESA 100 mm x 100 mm	Wall, Stand, Arm VESA 100mm x 100mm	Panel, Wall, Rack, Stand, Arm VESA 100mm x 100mm
	Color	Black				
	Dimensions (WxHxD) (mm)	310 x 265 x 52.6		400 x 267 x 54	363.2 x 305.1 x 58.8	399.4 x 271.2 x 58.8
	Weight (N/G)	3.2 kg / 5.5 kg	3.8 kg / 6.1 kg	3.8 kg	5.2 kg / 7.3 kg	4.5 kg / 6.5 Kg
Environment	Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 50°C	-20°C ~ 50°C with SSD	-10°C ~ 50°C	-20°C ~ 50°C	-20°C ~ 50°C
	Storage Temperature (°C)	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 60°C	-20°C ~ 50°C
	Humidity	10% to 95% (non-condensing)				
	IP Level	IP 64 compliant front panel				
	Safety&EMC	CE / FCC				
Power	Power Supply	60W power adapter Input: 100VAC~240VAC, 50/60 Hz Output: 19VDC	90W power adapter Input: 100VAC~240VAC, 50/60Hz Output: 19VDC	60W power adapter Input: 90VAC~264VAC, 50/60 Hz Output: 12VDC	90W power adapter Input:100 V AC ~ 240 V AC, 50 / 60Hz, Output: 19 V DC	90W power adapter Input:100 V AC ~ 240 V AC, 50 / 60Hz, Output: 19 V DC
	Power Requirement	9 ~ 36 VDC		12 VDC	9~36 VDC	9 ~ 36 VDC
	Power Consumption	19V@2.2A (Intel® Atom™ D525 CPU with 800MHz 2GB DDR3 memory)	19V@2.68A (Intel® Core™ i5-2510E processor with 4GB DDR3 memory)	12V@4.25A (Intel® Atom™ N270 CPU with 667MHz 2GB DDR2 memory)	19V@3.42A (Intel® Core™ i3-2100T CPU with 4GB 1333 Mhz DDR3 memory)	19V@3.95A (Intel® Core™ i3-2120 CPU with 4GB 1333 Mhz DDR3 memory)

AFOLUX GEN II 17"~21.5" Selection Guide

Model		AFL2-17A-H61	AFL2-W19A-H61	AFL2-W21A-H61	IBS-19A
LCD Specifications	Size	17" (4:3)	W18.9" (16:10)	W21.5" (16:9)	19"
	Resolution	1280 (W) x 1024 (H)	1440 (W) X 900 (H)	1920(W) x 1080(H)	1280 x 1024
	Brightness (cd/m²)	350	250	250	300
	Contrast Ratio	1000:1	1000:1	1000 : 1	2000:1
	LCD Color	16.7M	16.7M	16.7M	16.7M
	Pixel Pitch (mm)	0.264 (H) x 0.264 (V)	0.2835 (H) x 0.2835 (V)	0.248mm x 0.248mm	0.294mm x 0.294mm
	Viewing Angle (H-V)	170° / 160°	170° / 160°	165° / 165°	178° / 178°
	Backlight MTBF	50,000 (LED backlight)	30,000 (LED backlight)	30,000 (LED backlight)	50,000
Touch	Touch Screen	5-wire rsistive type with RS-232 interface / projected capacitive type with USB interface		Projected capacitive type with USB interface	5-wire resistive type
	Touch Controller	PenMount DMC9000 (Resistive Type) / EETI EXC7200 & EXC5404 (Projected capacitive type)		EETI EXC7200 & EXC5404	PenMount DMC9000 (Resistive Type)
System	CPU	2nd/3rd Generation of Intel®Core™ i7/i5/i3 and Pentium® processors		2nd/3rd Generation of Intel®Core™ i7/i5/ i3 and Pentium® processors	Intel®Core™ i5/i3 and Pentium® processors
	Chipset	Intel® H61			
	RAM	Support two 204-pin DDR3 SO-DIMM slot (system Max. 16GB)		Support two 204-pin DDR3 SO-DIMM slots (System Max. 16GB)	Support two DDR3 1333MHz SDRAM SO-DIMMs
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0			3 x Realtek PCIe RTL8111E GbE
	Audio Codec	Realtek ALC892 HD Audio codec			
	Storage	2.5" SATA 3Gb/s HDD bay			
	CD-ROM	1 x Slim Type CD-ROM bay			
	Input / Output	2 x RS-232 (DB-9 connector) 1 x RS-422/485 (DB-9 connector) 2 x GbE LAN (one on the bottom, one on the left) 2 x USB 3.0 3 x USB 2.0 (two on the bottom, one on the left) 1 x Mini USB port on front panel 1 x MicroSD card slot on front panel	1 x Line-out, Mic (on the left) 1 x VGA port (DB-15 connector) 1 x Type K 1 x HDMI port 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x 9 ~ 36V DC input jack	2 x RS-232 (DB-9 Connector) 1 x RS-422/485 COM Port (DB-9 connector) 2 x GbE LAN (RJ-45 connector) 3 x USB 2.0 2 x USB 3.0 1 x HDMI on bottom side 1 x Line out/MIC on left side 1 x VGA port (DB-15 Connector) 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Clear CMOS button 1 x Type K 1 x 9~36V DC jack	1 x External power switch connector 1 x RS-422/485 1 x USB 2.0 1 x GbE LAN RJ-45 1 x RS-232 2 x RJ-45 GbE LAN 1 x HDMI 2 x USB 2.0 1 x Mic-in 1 x Line-out 1 x AT/ATX Switch 1 x Reset Button
	Expansion Interface	1 x PCIe Mini slot reserved			
Other Features	Audio	AMP 2W + 2W (internal speaker)		AMP 3W + 3W (internal speaker)	2 x 3W
	Camera	2 M pixels with low light function			1.3 M pixels with low light function
	RFID Reader	EM 125 KHz or Mifare 13.56 MHz card reader (optional)			Mifare 13.56 MHz card reader (optional)
	MSR Card Reader	MSR card reader (optional), MSI			IC card reader
	TPM	Reserved by pin-header			
	OSD Function	LCD on/off, brightness up/down, volume up/down, Hot Key			
	Ambient Light Sensor	Yes			
	Infrared Remote Controller	Yes			
	LED Light Bar	Yes			
	System Cooling	Light fanless (smart fan operates above default temperature setting)			Active with fan
Connectivity	Wireless	IEEE 802.11b/g/n 2T2R module (WIFI-RT5392-SB-R10)			IEEE 802.11b/g/n 3T3R module
	Bluetooth	Bluetooth V2.0+EDR with USB interface (optional)			N/A
Physical	Construction Front Panel	PC + ABS Plastic			Anti-bacteria plastic front frame
	Mounting	Panel, Wall, Rack, Stand, Arm VESA 100mm x 100mm	Panel, Wall, Stand, Arm VESA 100mm x 100mm	Wall, Panel, Stand and VESA 100 mm x 100mm	Wall, Stand and Arm VESA 100mm x 100mm
	Color	Black			white (RAL 9016)
	Dimensions (WxHxD)(mm)	418 x 378 x 65	488 x 361 x 65	547 x 346 x 71, withLED Light Bar	466 x 428 x 65
	Weight (N/G)	6.9 kg / 9.0 kg	7.3 kg / 10 Kg	7.3 Kg / 9.4 Kg (with LED Light Bar)	7.28 kg
Environment	Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 40°C	-20°C ~ 50°C	-10°C ~ 50°C	0°C ~ 40°C
	Storage Temperature (°C)	-20°C ~ 60°C			
	Humidity	10% to 95% (non-condensing)			
	IP Level	IP 64 compliant front panel			
	Safety&EMC	CE / FCC			
Power	Power Supply	120W power adapter Input:100 V AC ~ 240 V AC, 50 / 60Hz, Output: 19 V DC			120W power adapter Input:90 V AC ~ 264 V AC, Output: 19 V DC
	Power Requirement	9 ~ 36 VDC	9 ~ 36 VDC	9 ~ 36 VDC	9 ~ 28 VDC
	Power Consumption	19V@5.3A (Intel® Core™ i3-2100T CPU with 4GB 1333 Mhz 4GB DDR3 memory)	19V@5.58A (Intel® Core™ i3-2100T CPU with 4GB 1333 Mhz 4GB DDR3 memory)	19V@3.82A (Intel® Core™ i3-2120T processor with 4GB DDR3 memory)	19V@5.11A (Intel® Core™ i3-2120T processor with 2GB DDR3 memory)

AFL2-W21A-H61 New

Intel® Core™ i7/i5/i3 and Pentium® Processor

IEI designed a completely new model for its new AFOLUX GEN II Panel PCs. AFL2-W21A-H61 with exclusive LED light bar function combining

Features

- Two 204-pin DDR3 SO-DIMM slot (system max. 16GB) pre-installed with 4GB (2GB x 2)
- Projected capacitive touchscreen supported
- Wi-Fi 802.11b/g/n 2T2R high speed wireless
- EM or Mifare RFID reader
- Programmable colorful LED light bar
- Built-in two 3W speakers and microphone
- Auto dimming control
- Light fanless design
- Wide range 9~36 VDC input

Full HD Second Display Through HDMI Interface

Full-HD 1080p (1920x1080) reacts the resolution of panel, which is a set of high-definition video modes with 1920 of horizontal resolution and 1080 of vertical resolution. Widescreen aspect ratio of 16:9 supports perfect display sight, with brighter digital display.

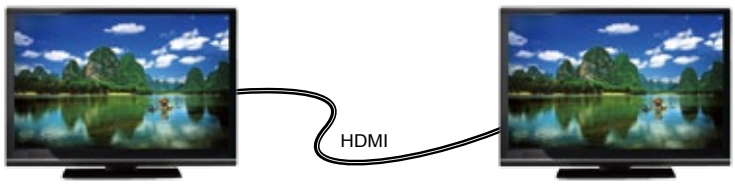

1920 lines of horizontal resolution supporting a 16:9 ratio to perform perfect display sight.

IEI Customized Expansion

Standard Connector Type Easy to Design Expansion Module

The AFL2-W21A-H61 can customize the expansion board depending on user's necessary. Customer can choose digital TV, 3G,video capturing…and so on.

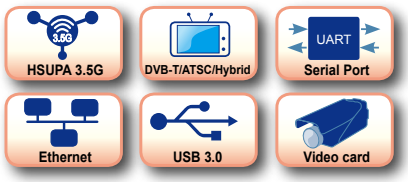

Use one system in different markets!

Features

- Reliable board to board connection
- IEI provides ODM service which customize boards of user's demand.

Digital TV

Kiosk System

3G/3.75G

Mobile Broadcasting System

4-Port Video Capture

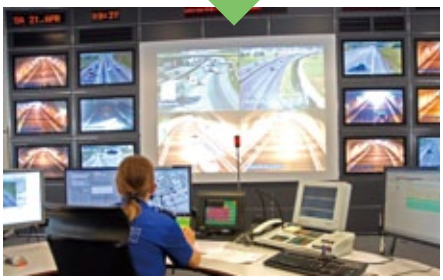

Surveillance System

Specifications

Model		AFL2-W21A-H61
LCD Specifications	LCD Display	W21.5" (16:9)
	Max Resolution	1920 (W) x 1080 (H)
	Brightness (cd/m2)	250
	Contrast Ratio	1000 : 1
	LCD Color	16.7M
	Pixel Pitch (mm)	0.24825 mm x 0.24825 mm
	Viewing Angle (H-V)	170° / 160°
	Backlight MTBF (Hrs)	30000 (LED backlight)
Touch	Touch Screen	projected capacitive type with USB interface
	Touch Controller	EETI EXC7200 & EXC5404
System	CPU	Intel® Core™ i7/i5/i3 and Pentium® processors
	Chipset	Intel® H61
	RAM	Support two 204-pin DDR3 SO-DIMM slot (max. 16GB) preinstalled with 4GB (2GB x 2)
	Storage	1 x 2.5" SATA 3Gb/s HDD Bay
	Optical Drive	1 x Slim Type DVD-ROM bay
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0
	Audio Codec	Realtek ALC892 HD Audio codec
	Audio	Amplifier 3W + 3W
	Webcam & Microphone	2-megapixel camera with low light function Digital Microphone
	I/O Ports	2 x RS232 (DB9 Connector) 1 x RS422/485 COM Port (DB9 connector) 2 x GbE LAN (RJ-45 connector) 3 x USB 2.0 2 x USB 3.0 1 x HDMI 1 x VGA port (DB-15 Connector) 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Clear CMOS button 1 x Type K 1 x 9~36V DC jack 1 x Line out 1 x Mic
	Expansion Interface	1 x PCIe Mini for Wi-Fi Module 1 x PCIe Mini reserved
	Cooling System	Light Fanless
Other Features	EM and Mifare RFID	Optional: EM 125 KHz or Mifare 13.56 MHz card reader
	LED Light Bar	Programmable R/G/B colorful LED light bar (SMBus Control)
	Function Key	6 x function keys: Key1 Backlight On/Off Key2 Audio - Key3 Audio + Key4 Brightness - Key5 Brightness+ Key6 Fn Combinations: Fn+Key1 RFID Enable/Disable Fn+Key2 Audio Mute Fn+Key3 Camera Enable/Disable Fn+Key5 Power ON/OFF
	Infrared	IR receiver 38KHz
	Light Sensor	Ambient light sensor for panel brightness adjustment
	TPM	Reserved by pin-header
OS Support	OS Support	Windows Embedded Standard 7 Windows XP Embedded, Debian 6.0 Backports
Connectivity	Wireless	IEEE 802.11b/g/n 2T2R module (WIFI-RT5392-SB-R10)
	Bluetooth	Bluetooth V2.0+EDR with USB interface (optional)
Physical	Construction Material	PC + ABS plastic for front cover and rear cover
	Mounting	Wall, Stand and VESA 100 mm x 100mm
	Enclosure Color	Sliver + Black
	Dimension (mm)	546.85 (W) x 345.82 (H) x 70.35 (D)
	Weight (Net/Gross)	8.27 Kg / 11.27 Kg
Enviornment	Operating Temperature (with air flow)	-10°C ~ 50°C
	Storage Temperature	-20°C ~ 60°C
	Humidity	10% to 90% (non-condensing)
	IP Level	IP 64 compliant front panel
	Safety and EMC	CE & FCC
Power	Power Adapter	120W power adapter Input: 100 V AC ~ 240 V AC, 50 / 60Hz, Output: 19 V DC
	Power Input	9 ~ 36V DC-IN
	Power Consumption	19V@3.82A (Intel® Core™ i3-2120T processor with 4GB DDR3 memory)

AFL2-W21A-H61 Dimensions (Unit: mm)

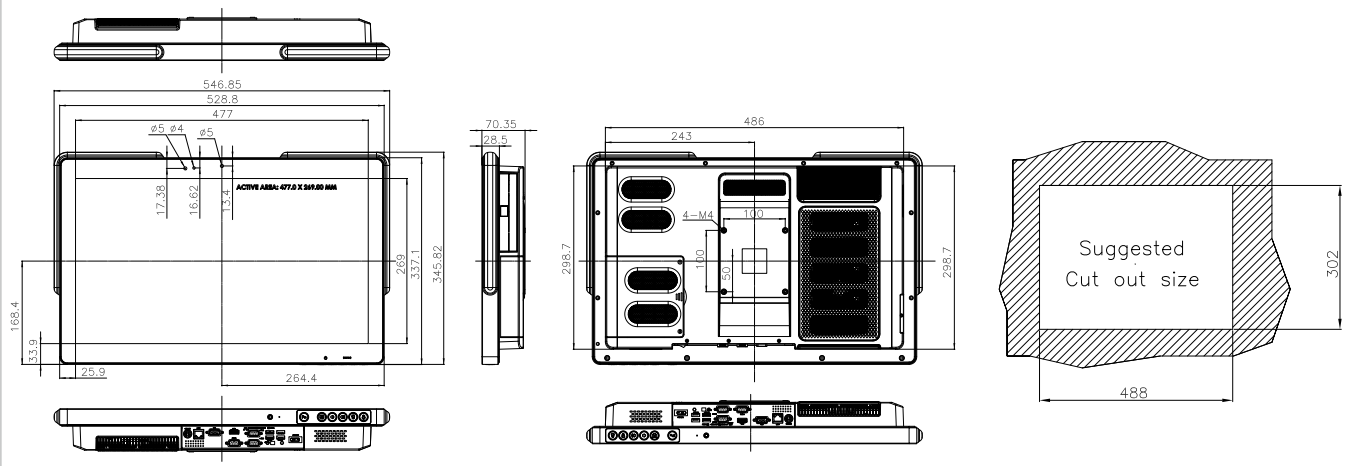

Rich I/O Interface

Fn Fn
Backlight On/Off
Audio -
Audio +
Brightness -
Brightness +

Fn + RFID Enable/Disable
Fn + Audio Mute
Fn + Camera Enable/Disable
Fn + Power On / Off

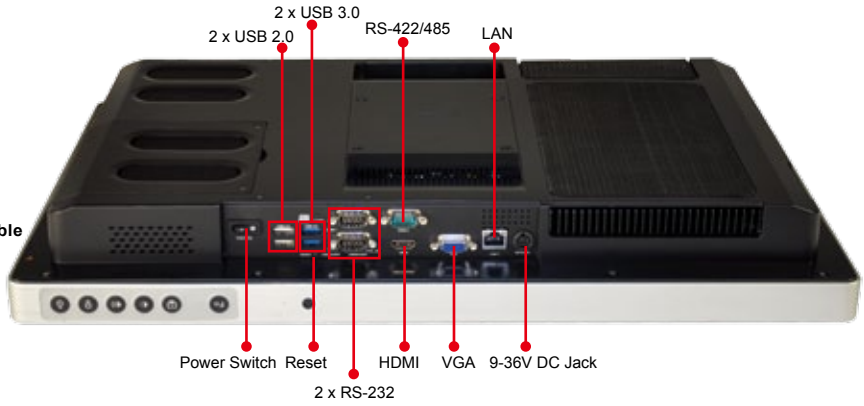

Options

Item	AFL2-W21A-H61
Panel Mount Kit	AFL2PK-W21A
Wall Mounting Kit	AFLWK-19B
Stand	STAND-A21-R10
ARM	ARM-31-RS
Slim DVD Burner Installation Kit (Including SATA Cable)	AFL2-DVD-KIT01-R10
Hybrid Card Reader (MSI only for AFL2-W21AB series)	AFL2P-21AMSI-U-R10
Magnetic Stripe Reader	AFL2P-21AMSR-U-R10
Bluetooth Module Kit	AFL2-BT-KIT01-R11
Trusted Platform Module (TPM)	TPM-IN01-R11
EM RFID Reader	AFL2-EM-RFID-KIT03-R10
Mifare RFID Reader	AFL2-MF-RFID-KIT01-R11
OS: Windows® XP Embedded (CD-ROM)	AFL2-W21-H61-XPE-R10
OS: Debian Linux (CD-ROM)	AFL2-W21-H61-LNX-R10
OS: Windows® Embedded Standard 7 (DVD-ROM)	AFL2-W21-H61-WES7P-R10
Temperature Sensor Cable	32133-004300-100-RS

Packing List

Item	P/N	Q'ty	Description
Utility CD	7B000-000952-RS	1	drivers and user manual
One Key Recovery CD	7B000-000781-RS	1	
Power Adapter	63000-FSP120AAB-RS	1	FSP120-AAB ; 90~264VAC input ; 120W ; 19VAC output
Power Cord	32702-000401-100-RS	1	European, 1500mm
Power Transfer Cord	32000-089400-RS	1	
Infrared Remote Controller	7Z000-SLPCB005-RS	1	
M3 Screw Pack	44013-030041-RS	4	M3 x 4 for securing HDD
M4 Screw Pack	44033-040061-RS	4	M4 x 4 for VESA screw

Ordering Information

LED Bar	Model	Description
LED Bar	AFL2-W21A-H61-i5/PC-R10	21.5" 250cd/m² FHD panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R10
	AFL2-W21A-H61-i3/PC-R10	21.5" 250cd/m² FHD panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R10
	AFL2-W21A-H61-P/PC-R10	21.5" 250cd/m² FHD panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R10
Without LED Bar	AFL2-W21AB-H61-i5/PC-R10	21.5" 250cd/m² FHD panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, without LED bar, R10
	AFL2-W21AB-H61-i3/PC-R10	21.5" 250cd/m² FHD panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, without LED bar, R10
	AFL2-W21AB-H61-P/PC-R10	21.5" 250cd/m² FHD panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, without LED bar, R10

IBS-19A Series

19” Interactive Panel PC features Intel® Core™ i5/i3 Processor

New

Features

- Best price and high-performance Intel® Core™ i5/i3 processor
- Easy cleaning and maintenance in Medical environment
- Feature-rich bedside applications for patients
- Professional point-if-care features for clinician
- Innovative LED dash light system for efficient visual management
- Easy installation with flexible mounting and cabling

Wi-Fi | Touchscreen | Camera | Microphone | EM/Mifare | SCR | Intel Intelligent Systems Alliance

Specifications

Model		IBS-19A
CPU		Intel® Core™ i5 - 2390T 2.7GHz
		Intel® Core™ i3 - 21xxT above 2.5GHz
		Intel® Pentium® - G6xxT above 2.2GHz
Chipset		Intel® H61 Express Chipset
RAM Slot		Two DDR3 1333MHz SDRAM SO-DIMMs
		System max. 4GB
Display	LCD Size	19"
	Resolution	1280 x 1024
	Brightness (nits)	300
	Backlight	LED
	Contrast Ratio	2000
	Viewing Angle	89/89/89/89
	Operation Lifetime (Hrs)	50000
	Gamma Table	Grayscale Mode - DICOM GSDF Clear Base 6500K
		Grayscale Mode - DICOM GSDF Blue Base 9300K
		Color Mode - Gamma 2.2 6500K
		Color Mode - DICOM GSDF Clear Base 6500K
		Color Mode - Gamma 2.2 9300K
		Color Mode - DICOM GSDF Blue Base 9300K
Touch Screen		5-wire resistive type
Wireless	Wi-Fi	802.11a/b/g/n dual-band 2.4Ghz/5Ghz
Drive Bay	HDD	1 x 2.5" SATA HDD
	ODD	1 x Slim DVD RW 24x
I/O Ports	Backward I/O Set	1 x External power switch connector 1 x RS-422/485 1 x USB 2.0 1 x GbE LAN RJ-45
	Downward I/O Set	1 x RS-232 2 x RJ-45 GbE LAN 1 x HDMI 2 x USB 2.0 1 x Mic-in 1 x Line-out 1 x AT/ATX Switch 1 x Reset Button
Audio/Video	Webcam	1280 x 1024 CMOS camera
	Microphone	Stereo
	Speakers	2 x 3W
	Handset	Optional handset with speaker and microhpne
	Digital TV Tuner	Optional DVB-T by project case
LED Dash Light	Upper	26 x true color LED
	Left	20 x true color LED
	Right	20 x true color LED
OSD Key		6-key touch sensor pad
		Programmable Fn key
RFID		Optional Mifare 13.56Mhz RFID reader
Smart Card Reader		Optional ISO7816-1,2,3 card reader
Remote control		Infrared remote control for display OSD
Power	DC Input	9~28 V DC
	External Adaptar	130W 90~264 V@AC to 12V@DC
IP Level	Front Panel	IP 64
Environmental Condition	Operating Temp.	0°C ~ 40°C

Rich I/O Interface

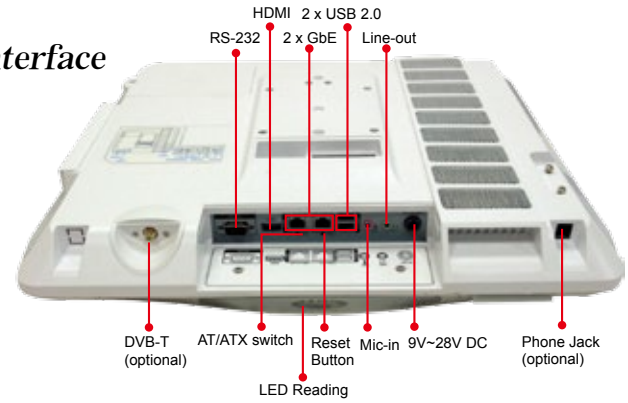

IBS-19A Dimensions (Unit: mm)

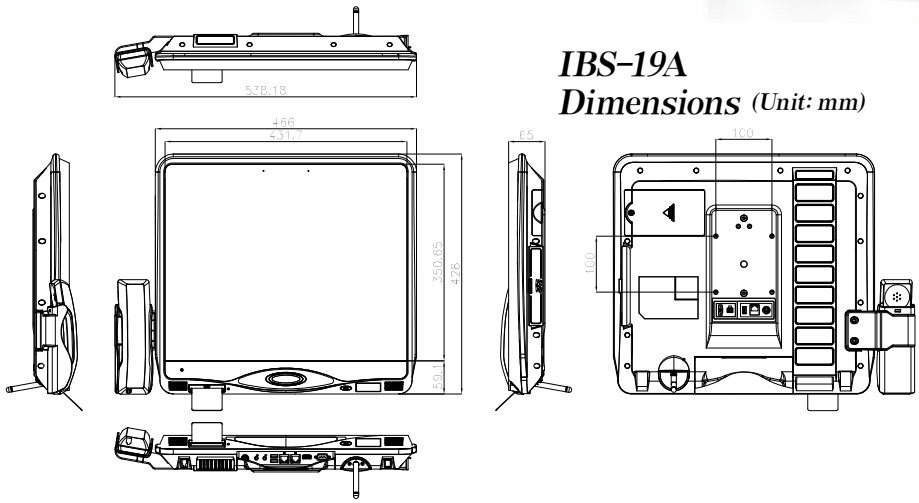

Options

Item	Part No.	Item	Part No.
Handset	IBSOPT-HS-R10	**Smart Card Reader**	IBSOPT-SCR-R10
Mifare RFID Reader	IBSOPT-RFID-R10	**Arm**	ARM-31-RS
Wall Mounting Kit	AFLWK-19B	**Stand**	STAND-300SW-RS/STAND-A19/STAND-A21-R10/STAND-C19

Packing List

Item	Part No.	Q'ty	Description
Utility CD	7B000-000773-RS	1	Drivers and User Manual
Power Adapter	63040-010120-010-RS	1	PMP120-13-2, 90~264VAC Input, 120W, 19VDC output
Power Cord	32702-000200-100-RS	1	European, 1830mm
Pen	43125-0002C0-00-RS	1	For Resistive Touch
Mounting Bracket	41120-0310C0-00-RS	1	Mount Bracket
Infrared Remote Controller	7Z000-SLPCB005-RS	1	

Ordering Information

Part No.	Description
IBS-19A3L-P/2G/32G-R10	19" Interactive Panel PC, Intel® H61 platform, with Pentium® G6xxT CPU (2.2GHz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, R10.
IBS-19A3D-P/2G/32G-R10	19" Interactive Panel PC, Intel® H61 platform, with Pentium® G6xxT CPU (2.2GHz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, DICOM GSDF Calibrated, R10.
IBS-19A3S-P/2G/32G-R10	19" Interactive Panel PC, Intel® H61 platform, with Pentium® G6xxT CPU (2.2GHz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, LED Dash Light, RFID, Smart Card Reader, AC to DC 19V Power Adapter, R10.
IBS-19A3L-i3/2G/32G-R10	19" Interactive Panel PC, Intel® H61 platform, Core™ i3 21xxT (2.5Ghz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, R10.
IBS-19A3D-i3/2G/32G-R10	19" Interactive Panel PC, Intel® H61 platform, Core™ i3 21xxT (2.5Ghz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, DICOM GSDF Calibrated, R10.
IBS-19A3S-i3/2G/32G-R10	19" Interactive Panel PC, Intel® H61 platform, Core™ i3 21xxT (2.5Ghz above), TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, LED Dash Light, RFID, Smart Card Reader, AC to DC 19V Power Adapter, R10.
IBS-19A3L-i5/2G/32G-R10	19" Interactive Panel PC, Intel® H61 platform, Core™ i5 2390T 2.7GHz, TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, R10.
IBS-19A3D-i5/2G/32G-R10	19" Interactive Panel PC, Intel® H61 platform, Core™ i5 2390T 2.7GHz, TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, AC to DC 19V Power Adapter, DICOM GSDF Calibrated, R10.
IBS-19A3S-i5/2G/32G-R10	19" Interactive Panel PC, Intel® H61 platform, Core™ i5 2390T 2.7GHz, TDP 35W, 2GB DDR3 RAM, 320GB HDD, Wireless 802.11a/b/g/n, Touchscreen, Slim DVD-RW, LED Dash Light, RFID, Smart Card Reader, AC to DC 19V Power Adapter, R10.

AFL2-W07A-N26

Intel® Atom™ N2600 Dual Core Processor

AFL2-08A-N26

Intel® Atom™ N2600 Dual Core Processor

AFL2-W07A-N26

Features

- Flat-bezel LCD with LED backlight
- Intel® Atom™ N2600 dual core 1.6 GHz processor
- One 800 MHz 204-pin DDR3 SO-DIMM slot (system max. 2GB) pre-installed with 2GB
- 5-wire resistive type touch screen supported
- Wi-Fi 802.11b/g/n 2T2R high speed wireless
- Built-in EM or Mifare RFID reader (optional)
- IP64 compliant front panel
- Auto dimming control

Specifications

	Model	AFL2-W07A-N26	AFL2-08A-N26
LCD Specifications	Size	Wide 7”	8"
	Resolution	800 (W) x 480 (H)	800 (W) x 600 (H)
	Brightness (cd/m²)	400 cd/m²	350 cd/m²
	Contrast Ratio	500:1	500:1
	LCD Color	262K/16.2M	16.2 M
	Pixel Pitch (mm)	0.1905 (H) x 0.1905 (V)	0.2025 (H) x 0.2025 (V)
	Viewing Angle (H-V)	160°(H) / 160°(V)	140°(H) / 130°(V)
	Backlight MTBF	50000 hrs (LED backlight)	30000 hrs (LED backlight)
Touch	Touch Screen	5-wire rsistive type with RS-232 interface	
	Touch Controller	PenMount DMC9000	
System	CPU	Intel® Atom™ N2600 dual core 1.6 GHz CPU	
	Chipset	Intel® NM10	
	RAM	Support one 800 MHz 204-pin DDR3 SO-DIMM slot (max. 2GB) pre-installed wiith 2GB	
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0	
	Audio Codec	Realtek ALC892 HD Audio codec	
	Storage	mSATA	
	Input / Output	1 × RS-232 COM Port (DB-9) 1 × RS-422/485 COM Port (RJ-11) 1 × GbE LAN (RJ-45) 2 × USB 2.0 2 × USB 3.0 1 × Audio jack 1 × Display port	1 x Mini USB 2.0 port on front panel 1 x MicroSD card slot on front panel 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x DC input jack
Other Features	Audio	AMP 0.8 W + 0.8 W	
	Microphone	Digital Microphone	
	RFID Reader	EM 125 KHz or Mifare 13.56 MHz card reader (optional)	
	MSR Card Reader	MSR card reader (optional)	
	OSD Function	LCD on/off, brightness up/down, volume up/down,hotkey	
	Ambient Light Sensor	Yes	
	Infrared Remote Controller	Yes	
	System Cooling	Fanless	
Connectivity	Wireless	IEEE 802.11b/g/n 2T2R module (WIFI-RT5392-SB-R10)	
	Bluetooth	Bluetooth V2.0+EDR with USB interface (optional)	
Physical	Construction Front Panel	PC + ABS plastic front frame	
	Mounting	Wall, Panel, Stand, RACK Mounting and VESA 75 mm x 75mm	
	Color	Black	
	Dimensions (WxHxD)(mm)	208 x 158.5 x 45.9	215 x 188 x 46
	Weight (N/G)	1.12 kg / 2.08 kg	1.43 kg / 2.2 kg
Environment	Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 40°C	
	Storage Temperature (°C)	-20°C ~ 60°C	
	Humidity	10% to 95% (non-condensing)	
	IP Level	IP 64 compliant front panel	
	Safety&EMC	CE / FCC	
Power	Power Supply	36W power adapter Input: 90VAC~264VAC, 50/60 Hz, Output: 12VDC	
	Power Requirement	9 ~ 36 VDC	
	Power Consumption	12V@2.27A (Intel® Atom™ N2600 CPU with 2GB DDR3 momory)	12V@2.27A (Intel® Atom™ N2600 CPU with 2GB DDR3 momory)

Rich I/O Interface

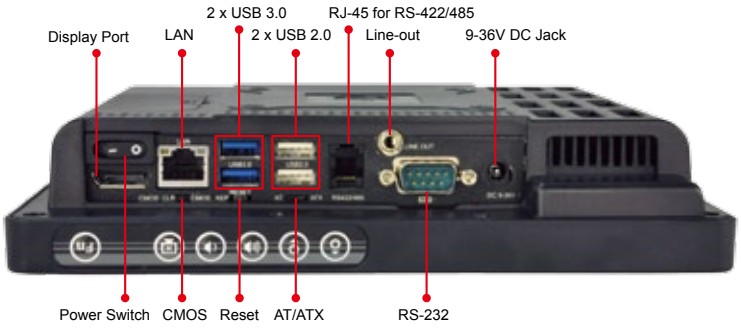

- Fn: Fn
- Backlight On/Off
- Audio -
- Audio +
- Brightness -
- Brightness +
- Fn + RFID Enable/Disable
- Fn + Audio Mute
- Fn + Camera Enable/Disable
- Fn + Front Side USB Enable/Disable
- Fn + Power On / Off

Options

Item	AFL2-W07A-N26	AFL2-08A-N26
Panel Mounting Kit	AFL2PK-08A	
Wall Mounting Kit	AFLWK-12	
Rack Mounting Kit	AFL2RK-W07A	AFL2RK-08A
Stand	STAND-B08/STAND-C12-R10	
V-stand	VSTAND-A07-R11	
Hybrid Card Reader	AFL2P-08AMSI-U-R10	
Magnetic stripe reader	AFL2P-08AMSR-U-R10	
Bluetooth Module Kit	AFL2-BT-KIT01-R11	
EM RFID Reader	AFL2-EM-RFID-KIT01-R10	
Mifare RFID Reader	AFL2-MF-RFID-KIT01-R11	
OS: Win XPE (CD-ROM)	AFL2-W07A-CV-XPE-R10	
OS: Linux (CD-ROM)	AFL2-W07A-CV-LNX-R10	
OS: Win 7 Embedded (DVD-ROM)	AFL2-W07A-CV-WES7E-R10 (for Resistive Touch)	

Packing List

Item	P/N	Q'ty	Description
Utility CD	7B000-000889-RS	1	drivers and user manual
One Key Recovery CD		1	
Power adapter	63000-FSP036RAB608-RS	1	
Power cord	32702-000200-100-RS	1	European standard, 1830mm
Power transfer cord	32702-000300-100-RS	1	
RJ-11 to DB-9 COM port cable		1	
IR remote controller	7Z000-SLPCB001-RS	1	
Pen	43125-0002C0-00-RS	1	For Resistive Touch

Ordering Information

Part No.	Description
AFL2-W07A-N26/R/2G-R10	7" 400 cd/m² WVGA fanless panel PC with Intel® Atom™ N2600 dual core 1.6GHz, 802.11b/g/n wireless module, resistive touch screen, microphone, 2GB DDR3 RAM, R10
AFL2-08A-N26/R/2G-R10	8" 350 cd/m² SVGA fanless panel PC with Intel® Atom™ N2600 dual core 1.6GHz, 802.11b/g/n wireless module, resistive touch screen, microphone, 2GB DDR3 RAM, R10

AFL2-W07A Dimensions

(Unit: mm)

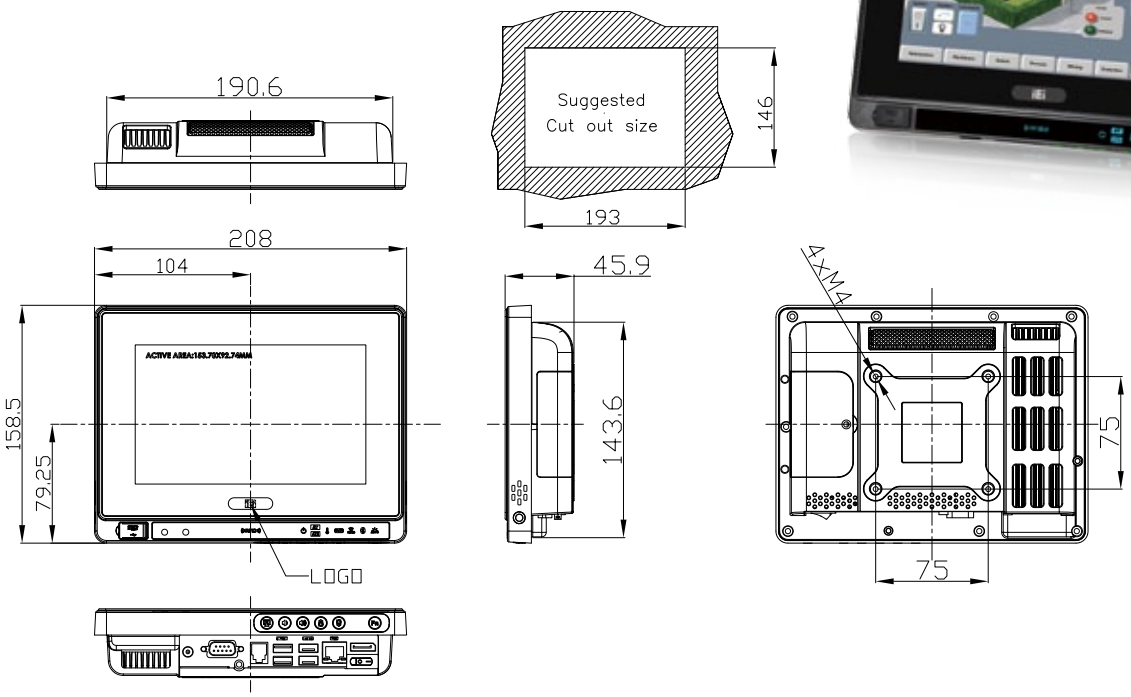

AFL2-08A Dimensions

(Unit: mm)

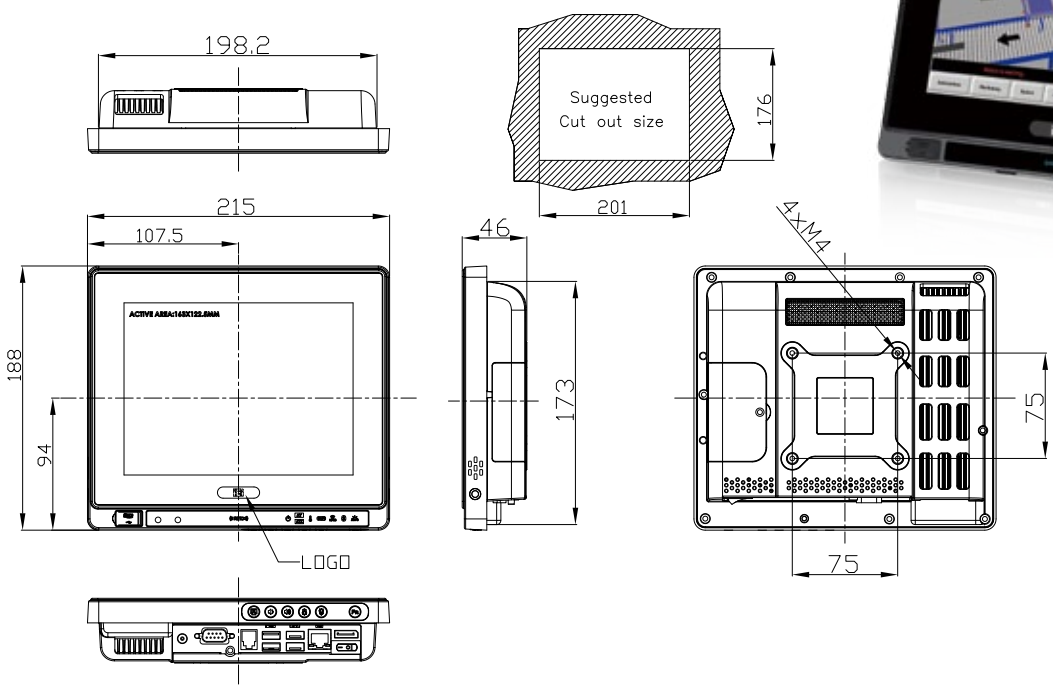

AFL2-W10A-N28

Intel® Atom™ N2800 Dual Core Processor

AFL2-10A-N28

Intel® Atom™ N2800 Dual Core Processor

AFL2-W10A-N28

Features

- Flat-bezel LCD with LED backlight
- Intel® Atom™ N2800 dual core 1.86 GHz processor
- One 1066 MHz 204-pin DDR3 SO-DIMM slot (system max. 4GB) pre-installed with 2GB
- 5-wire resistive type touch screen supported
- Wi-Fi 802.11b/g/n 2T2R high speed wireless
- EM or Mifare RFID reader
- Built-in 2M pixels webcam with AF, AE and AWB capabilities
- Built-in two 1.5W speakers and microphone
- IP 64 compliant front panel

Specifications

Model		AFL2-W10A-N28	AFL2-10A-N28
LCD Specifications	Size	Wide 10.2"	10.4"
	Resolution	1024 (W) x 600 (H)	800 (W) x 600 (H)
	Brightness (cd/m²)	400 cd/m²	400 cd/m²
	Contrast Ratio	400:1	700:1
	LCD Color	262K	262K/16.2M
	Pixel Pitch (mm)	0.2175 (H) x 0.2175 (V)	0.264 (H) x 0.264 (V)
	Viewing Angle (H-V)	140°(H) / 120°(V)	160°(H) / 140°(V)
	Backlight MTBF	30000 hrs (LED backlight)	30000 hrs (LED backlight)
Touch	Touch Screen	5-wire rsistive type with RS-232 interface	
	Touch Controller	PenMount DMC9000	
System	CPU	Intel® Atom™ N2800 dual core 1.86 GHz CPU	
	Chipset	Intel® NM10	
	RAM	Support one 1066MHz 204-pin DDR3 SO-DIMM slot (max. 4GB)	
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0	
	Audio Codec	Realtek ALC892 HD Audio codec	
	HDD	2.5" SATA 2.0 HDD bay	
	Input / Output	1 × RS-232 COM Port (DB-9) 1 × RS-232 COM Port (RJ-45) 1 × RS-422/485 COM Port (RJ-45) 1 × GbE LAN (RJ-45) 2 × USB 2.0 2 × USB 3.0 1 × Audio jack 1 x Display port	1 x Mini USB 2.0 port on front panel 1 x MicroSD card slot on front panel 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x DC input jack
Other Features	Audio	AMP 1.5 W + 1.5 W	
	Camera	2M pixels with low light function, digital microphone	
	RFID Reader	EM 125 KHz or Mifare 13.56 MHz card reader (optional)	
	MSR Card Reader	MSR card reader (optional)	
	OSD Function	LCD on/off, brightness up/down, volume up/down, hotkey	
	System Cooling	Fanless	
Connectivity	Wireless	IEEE 802.11b/g/n 2T2R module (WIFI-RT5392-SB-R10)	
	Bluetooth	Bluetooth V2.0+EDR with USB interface (optional)	
Physical	Construction Front Panel	PC + ABS plastic front frame	
	Mounting	Wall, Rack, Stand, RACK Mounting and Arm VESA 75mm x 75mm	
	Color	Black	
	Dimensions (WxHxD) (mm)	280 x 198 x 51	282.5 x 242.7 x 51
	Weight (N/G)	2.5 kg / 4.02 kg	2.98 kg / 4.5 kg
Environment	Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 45°C	
	Storage Temperature (°C)	-20°C ~ 60°C	
	Humidity	10% to 95% (non-condensing)	
	IP Level	IP 64 compliant front panel	
	Safety&EMC	CE / FCC	
Power	Power Supply	60W power adapter, Input: 90VAC~264VAC, 50/60 Hz, Output: 12VDC	
	Power Requirement	9 ~ 36 VDC	
	Power Consumption	12V@2.35A (Intel® Atom™ N2800 CPU with 2GB DDR3 memory)	12V@2.75A (Intel® Atom™ N2800 CPU with 2GB DDR3 memory)

Rich I/O Interface

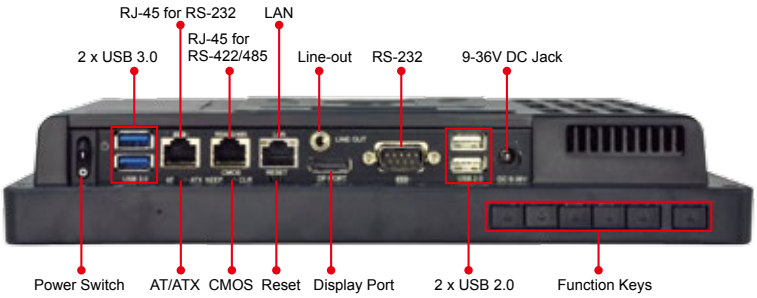

AFL2-10A-N28

1 x Mini USB port
1 x MicroSD card slot

Fn Fn

Backlight On/Off

Audio -

Audio +

Brightness -

Brightness +

Fn + **RFID Enable/Disable**

Fn + **Audio Mute**

Fn + **Camera Enable/Disable**

Fn + **Front Side USB Enable/Disable**

Fn + **Power On / Off**

Options

Item	AFL2-W10A-N28	AFL2-10A-N28
Panel Mounting Kit	AFL2PK-10A	
Wall Mounting Kit	AFLWK-12	
Rack Mounting Kit	AFL2RK-W10A	AFL2RK-10A
Stand	STAND-C12-R10/STAND-A21-R10	
V-stand	VSTAND-A10-R11	
Hybrid Card Reader	AFL2P-12AMSI-U-R10	
Magnetic Stripe Reader	AFL2P-12AMSR-U-R10	
Bluetooth Module Kit	AFL2-BT-KIT01-R11	
EM RFID Reader	AFL2-EM-RFID-KIT01-R10	
Mifare RFID Reader	AFL2-MF-RFID-KIT01-R11	
OS: Win XPE (CD-ROM)	AFL2-W10A-CV-XPE-R10	
OS: Linux (CD-ROM)	AFL2-W10A-CV-LNX-R10	
OS: Win 7 Embedded (DVD-ROM)	AFL2-W10A-CV-WES7E-R10 (for Resistive Touch)	

Packing List

Item	P/N	Q'ty	Description
Utility CD		1	drivers and user manual
One Key Recovery CD		1	
Power adapter	AFL2-MF-RFID-KIT01-R11	1	
Power cord	32702-000200-100-RS	1	European standard, 1830mm
Power transfer cord	32702-000300-100-RS	1	

Ordering Information

Part Number	Description
AFL2-W10A-N28/R/2G-R10	10.2" 400cd/m² WSVGA fanless panel PC with Intel® Atom™ cedarview N2800 dual core 1.86GHz, 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, 2GB DDR3 RAM, R10
AFL2-10A-N28/R/2G-R10	10.4" 400cd/m² SVGA fanless panel PC with Intel® Atom™ cedarview N2800 dual core 1.86GHz, 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, 2GB DDR3 RAM, R10

AFL2-W10A Dimensions

(Unit: mm)



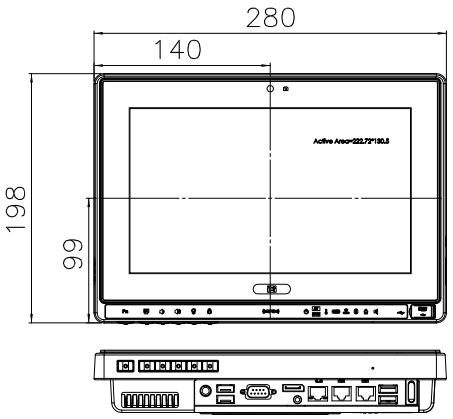



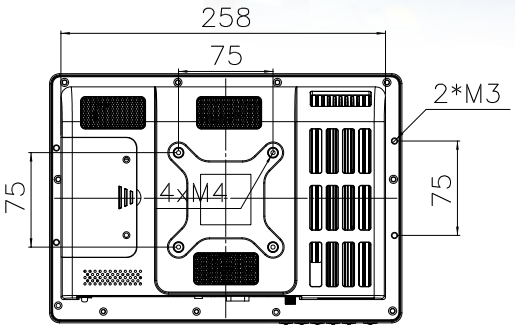

AFL2-10A Dimensions

(Unit: mm)

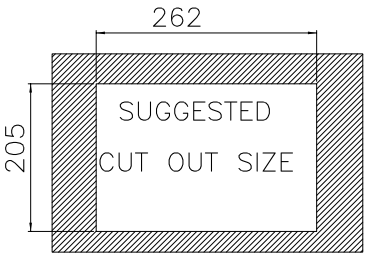

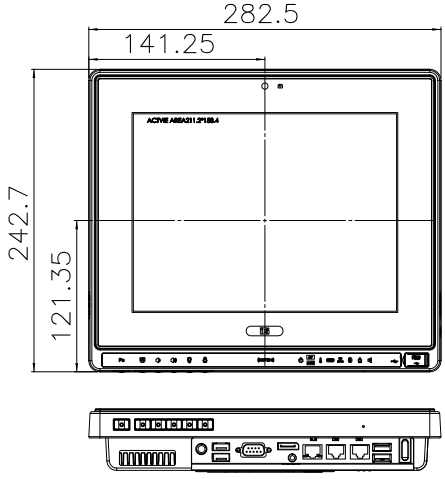

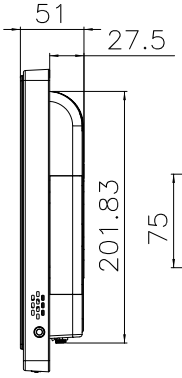

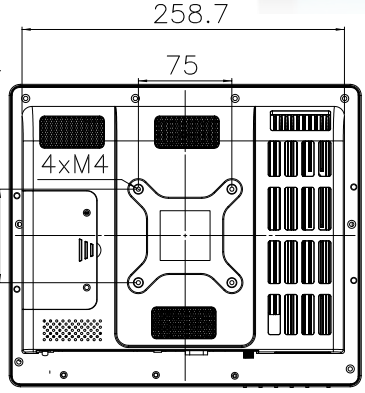

AFL2-12A-HM65

Intel® Core™ i7/i5/i3 Processor

AFL2-12A-D525

Intel® Atom™ D525 Dual Core Processor

Features

- 12.1” 600nits 1024 x 768 flat-bezel LCD with LED backlight
- Supports projected capacitive touchscreen or 5-wire resistive type touchscreen
- Built-in two 3W speakers and microphone
- GbE LAN for high speed network applications
- One 204-pin DDR3 SO-DIMM slot (system max. 4GB)
- Wi-Fi 802.11b/g/n 2T2R high speed wireless
- EM or Mifare RFID reader
- IP 64 compliant front panel
- Auto-dimming control
- Built-in 1.3 megapixels webcam with AF AE and AWB capabilities
- Wide range 9~36 VDC input

Specifications

	Model	AFL2-12A-D525 (Fanless)		AFL2-12A-HM65	
LCD Specifications	Size	12.1"			
	Resolution	1024 (W) x 768 (H)			
	Brightness (cd/m²)	600			
	Contrast Ratio	700:1			
	LCD Color	16.2 M			
	Pixel Pitch (mm)	0.240 (H) x 0.240 (V)			
	Viewing Angle (H-V)	160° / 140°			
	Backlight MTBF	50000 hrs (LED backlight)			
Touch	Touch Screen	5-wire rsistive type with RS-232 interface / projected capacitive type with USB interface			
	Touch Controller	PenMount DMC9000 / EETI EXC7200 & EXC5400			
System	CPU	Intel® Atom™ D525 1.8GHz dual core processor		2nd Generation Intel® Core™ i7/ i5/ i3 and Celeron® processor	
	Chipset	Intel® ICH8M		Intel® HM65	
	RAM	Support one 204-pin DDR3 SO-DIMM slot (Max. 4GB)			
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0			
	Audio Codec	Realtek ALC888 HD Audio codec			
	Storage	CF Type II socket 2.5" SATA 3Gb/s SSD bay mSATA		2.5" SATA 6Gb/s SSD bay	
	Input / Output	1 x RS-232 (DB-9) 1 x RS-232 (RJ-45) 1 x RS-422/485 (4-pin box header) 2 x GbE LAN (RJ-45) 4 x USB 2.0 1 x Mini USB 2.0 port on front panel 1 x Audio jack (line-out)	1 x VGA port (DB-15) 1 x MicroSD card slot on front panel 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x DC input jack	1 x RS-232 (DB-9) 1 x RS-232 (RJ-45) 1 x RS-422/485 (4-pin box header) 1 x GbE LAN (RJ-45) 2 x USB 2.0 2 x USB 3.0 1 x Mini USB 2.0 port on front panel 1 x Audio jack (line-out)	1 x HDMI port 1 x MicroSD card slot on front panel 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x DC input jack
Other Features	Audio	AMP 3W + 3W (internal speaker)			
	Camera	1.3 M pixels with low light function			
	RFID Reader	EM 125 KHz or Mifare 13.56 MHz card reader (optional)			
	MSR Card Reader	MSR card reader (optional)			
	OSD Function	LCD on/off, brightness up/down, volume up/down, Hot Key			
	Ambient Light Sensor	Yes			
	Infrared Remote Controller	Yes			
	System Cooling	Fanless		Smart fan	
Connectivity	Wireless	IEEE 802.11b/g/n 2T2R module (WIFI-RT5392-SB-R10)			
	Bluetooth	Bluetooth V2.0+EDR with USB interface (optional)			
Physical	Construction Front Panel	PC + ABS Plastic			
	Mounting	Panel, Wall, Rack, Stand and Arm VESA 100 mm x 100 mm			
	Color	Black			
	Dimensions (WxHxD)(mm)	310 x 265 x 52.6			
	Weight (N/G)	3.2 kg / 5.5 kg		3.8 kg / 6.1 kg	
Environment	Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 50°C		-20°C ~ 50°C with SSD	
	Storage Temperature (°C)	-20°C ~ 60°C		-20°C ~ 60°C	
	Humidity	10% to 95% (non-condensing)			
	IP Level	IP 64 compliant front panel			
	Safety&EMC	CE / FCC			
Power	Power Supply	60W power adapter Input: 100VAC~240VAC, 50/60 Hz Output: 19VDC		90W power adapter Input: 100VAC~240VAC, 50/60Hz Output: 19VDC	
	Power Requirement	9 ~ 36 VDC			
	Power Consumption	19V@2.2A (Intel® Atom™ D525 CPU with 800MHz 2GB DDR3 memory)		19V@2.68A (Intel® Core™ i5-2510E processor with 4GB DDR3 memory)	

Ordering Information

●AFL2-12A-D525

Part No.		Description
Resistive Touch Panel Screen	AFL2-12A-D525/R/1G-R12	12.1" 600cd/m² XGA fanless panel PC with Intel® Atom™ D525 dual core 1.8GHz, 802.11b/g/n wireless module, resistive touch screen, 1.3 M camera, microphone,1 GB DDR3 RAM, Dual GbE LAN, R12
Projective Capacitive Touch Screen	AFL2-12A-D525/PC/1G-R12	12.1" 600cd/m² XGA fanless panel PC with Intel® Atom™ D525 dual core 1.8GHz, 802.11b/g/n wireless module, projected capacitive touchscreen, 1.3 M camera, microphone,1 GB DDR3 RAM, Dual GbE LAN, R12

●AFL2-12A-HM65

Part No.		Description
Resistive Touch Screen	AFL2-12A-HM65/R-R11	12.1" 600cd/m² XGA panel PC, 802.11b/g/n wireless module, resistive touch screen, 1.3M camera, microphone, Single GbE LAN, R11
Projective Capacitive Touch Screen	AFL2-12A-HM65/PC-R11	12.1" 600cd/m² XGA panel PC, 802.11b/g/n wireless module, projected capacitive touchscreen, 1.3M camera, microphone, Single GbE LAN, R11
CPU Selection	CPU-MB-i7-2640M	2nd Generation Intel® Core™ i7 Processor [Mobile], PPGA-988, dual core 2.8GHz, 35W, iAMT
	CPU-MB-i5-2510E	2nd Generation Intel® Core™ i5 Processor [Mobile], PPGA-988, dual core 2.5GHz, 35W, iAMT
	CPU-MB-i3-2310M	2nd Generation Intel® Core™ i3 Processor [Mobile], PPGA-988, dual core 2.1GHz, 35W
	CPU-MB-CM-B810	Intel® Celeron® Mobile Processor, PPGA-988, dual core 1.6GHz, 35 W
	CPU-MB-CM-B710	Intel® Celeron® Mobile Processor, PPGA-988, single core 1.6GHz, 35 W
Memory Selection	DDR3-SO-1333-1GB	SO-DIMM DDR3 1333MHz 1GB
	DDR3-SO-1333-2GB	SO-DIMM DDR3 1333MHz 2GB
	DDR3-SO-1333-4GB	SO-DIMM DDR3 1333MHz 4GB

Options

Item	AFL2-12A-D525	AFL2-12A-HM65
Panel Mounting Kit	AFLPK-15	
Wall Mounting Kit	AFLWK-19B	
Rack Mounting Kit	AFL2RK-12	
Arm	ARM-11-RS	
Stand	STAND-A12-RS/STAND-A19-RS/STAND-A21-R10/STAND-C12-R10	
V-Stand	VSTAND-A11	
Hybrid Card Reader Kit	AFL2P-12AMSI-U-R10	
Bluetooth Module Kit	AFL2-BT-KIT01-R11	
Magnetic Stripe Reader Kit	AFL2P-12AMSR-U-R10	
EM RFID Reader	AFL2-EM-RFID-KIT01-R10	
Mifare RFID Reader	AFL2-MF-RFID-KIT01-R11	
OS: Win CE 6.0 (128MB CF Card)	AFL2CF-12-D525-CE060-128M-R10	AFL2-12A-HM65-CE060-R10*
OS: Win XPE (2GB CF Card)	AFL2CF-12-D525-XPE-2G-R10	AFL2-12A-HM65-XPE-R10*
OS: Win XPE (4GB CF Card)	AFL2CF-12-D525-XPE-4G-R10	AFL2-12A-HM65-XPE-R10*
OS: Linux (2GB CF Card)	AFL2CF-12-D525-LNX-2G-R10	AFL2-12A-HM65-LNX-R10*
OS: Win 7 Embedded (4GB CF Card)	AFL2CF-12-D525-WES7P-4G-R10 (for Projected Capacitive Touch) AFL2CF-12-D525-WES7E-4G-R10 (for Resistive Touch)	AFL2-12A-HM65-WES7P-R10* (for Projected Capacitive Touch) AFL2-12A-HM65-WES7E-R10* (for Resistive Touch)

*OS image with CD-ROM or DVD-ROM

Packing List

Item	P/N	Q'ty	Description
Utility CD		1	Drivers and user manual
One Key Recovery CD		1	
Power Adapter	63040-010065-010-RS (for AFL2-12A-D525) 63040-010090-030-RS (for AFL2-12A-HM65)	1	FSP065-RAB;90~264VAC input ; 65W ;19VDC output FSP090-D2BA1;90~264VAC input ; 90W ;19VDC output
Power Cord	32702-000401-100-RS	1	1500 mm, European Standard
Power Transfer Cord	32702-000300-100-RS	1	
M3 Screw Pack	44013-030041-RS	4	M3*4 for securing HDD
M4 Screw Pack	44403-040061-RS	4	M4*4 VESA screw
Touch Pen	43125-0002C0-00-RS	1	
RJ-45 to DB-9 COM Port Cable	32005-000200-200-RS	1	
IR Remote Controller	7Z000-SLPCB005-RS	1	
RS-422 Cable	32205-002400-100-RS	1	
Pen	43125-0002C0-00-RS	1	For Resistive Touch

Fully Integrated I/O

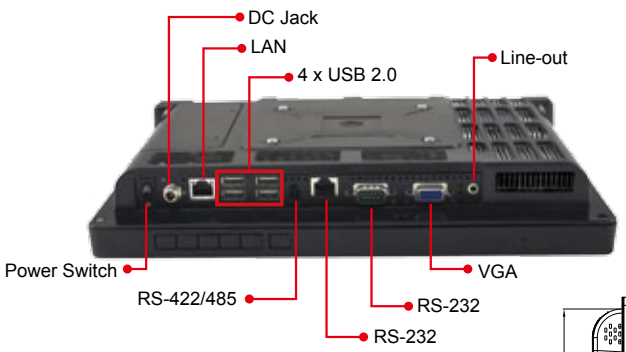

AFL2-12A-D525

AFL2-12A-D525 Dimensions

(Unit: mm)

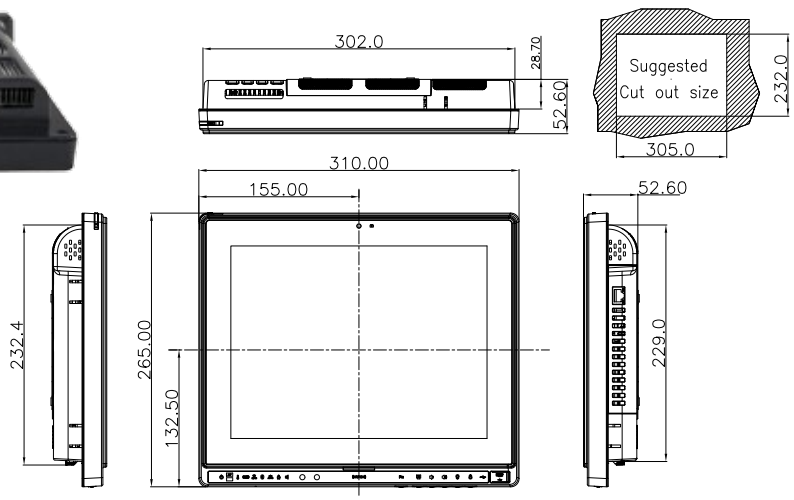

Fully Integrated I/O

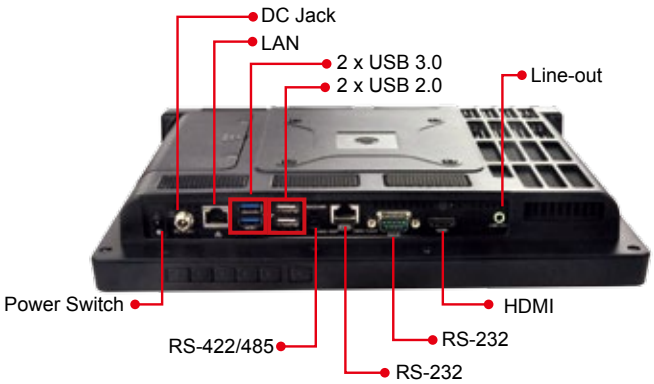

AFL2-12A-HM65

AFL2-12A-HM65 Dimensions

(Unit: mm)

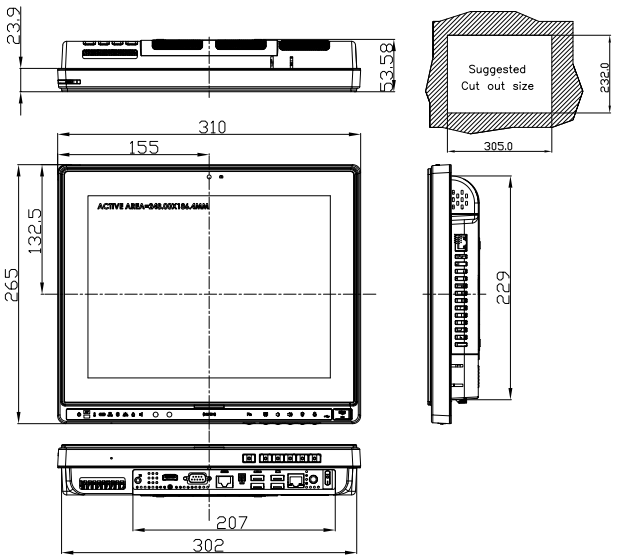

AFL2-15A-H61

Intel® Core™ i7/i5/i3 and Pentium® processor

AFL2-W15B-H61

Intel® Core™ i7/i5/i3 and Pentium® processor

AFL2-15A-H61

Features

- Flat-bezel LCD with LED backlight
- Intel® Core™ i5/ i3 and Pentium® processor
- Two 204-pin DDR3 SO-DIMM slot (system max. 16GB) preinstalled with 4GB (2GB x 2)
- Projected capacitive touchscreen and 5-wire resistive type touchscreen supported
- Wi-Fi 802.11b/g/n 2T2R high speed wireless
- EM or Mifare RFID reader
- Built-in 2M pixels webcam with AF, AE and AWB capabilities
- Built-in two 2W speakers and microphone
- IP 64 compliant front panel
- Auto dimming control
- Light fanless technology design
- Type K thermocouple temperature sensor
- Wide range 9~36 VDC input

Specifications

	Model	AFL2-15A-H61	AFL2-W15B-H61
LCD Specifications	Size	15″ (4:3)	W15.6” (16:9)
	Resolution	1024 (W) x 768 (H)	1366 (W) x 768 (H)
	Brightness (cd/m²)	400	300
	Contrast Ratio	700:1	500:1
	LCD Color	262K/16.2M	16.7M
	Pixel Pitch (mm)	0.297 (H) x 0.297 (V)	0.252 (H) x 0.252 (V)
	Viewing Angle (H-V)	160° / 140°	170° / 160°
	Backlight MTBF	50,000 hrs (LED backlight)	50,000 hrs (LED backlight)
Touch	Touch Screen	5-wire rsistive type with RS-232 interface / projected capacitive type with USB interface	
	Touch Controller	PenMount DMC9000 / EETI EXC7200 & EXC5404	
System	CPU	2nd/3rd Generation Intel® Core™ i7/i5/i3 and Pentium® processors	
	Chipset	Intel® H61	
	RAM	Support two 204-pin DDR3 SO-DIMM slot (max. 16GB) preinstalled with 4GB (2GB x 2)	
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0	
	Audio Codec	Realtek ALC892 HD Audio codec	
	Storage	CF Type II socket 2.5" SATA 3Gb/s HDD bay	
	Input / Output	2 x RS-232 (DB-9 connector) 1 x GbE LAN (RJ-45 connector) on left side 1 x RS-422/485 (RJ-45 connector) 3 x USB 2.0 (two on the bottom, one on the left) 2 x USB 3.0 1 x Mini USB port on front panel 1 x MicroSD card slot on front panel 1 x Line out, MIC on left side	1 x VGA port 1 x HDMI port 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x 9 ~ 36V DC jack 1 x Type K connector
Other Features	Audio	AMP 2W + 2W (internal speaker)	
	Camera	2M pixels with low light function	
	RFID Reader	EM 125 KHz or Mifare 13.56 MHz card reader (optional)	
	MSR Card Reader	MSR card reader (optional)	
	TPM	Reserved by pin-header	
	OSD Function	LCD on/off, brightness up/down, volume up/down, Hot Key	
	Ambient Light Sensor	Yes	
	Infrared Remote Controller	Yes	
	System Cooling	Light fanless (smart fan operates above default temperature setting)	
Connectivity	Wireless	IEEE 802.11b/g/n 2T2R module (WIFI-RT5392-SB-R10)	
	Bluetooth	Bluetooth V2.0+EDR with USB interface (optional)	
Physical	Construction Front Panel	PC + ABS Plastic	
	Mounting	Wall, Stand, Arm VESA 100mm x 100mm	Panel, Wall, Rack, Stand, Arm VESA 100mm x 100mm
	Color	Black	
	Dimensions (WxHxD) (mm)	363.2 x 305.1 x 58.8	399.4 x 271.2 x 58.8
	Weight (N/G)	5.2 kg / 7.3 kg	4.5 kg / 6.5 Kg
Environment	Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 50°C	
	Storage Temperature (°C)	-20°C ~ 60°C	
	Humidity	10% to 95% (non-condensing)	
	IP Level	IP 64 compliant front panel	
	Safety&EMC	CE / FCC	
Power	Power Supply	90W power adapter Input:100 V AC ~ 240 V AC, 50 / 60Hz, Output: 19 V DC	
	Power Requirement	9 ~ 36 VDC	
	Power Consumption	19V@3.42A (Intel® Core™ i3-2100T CPU with 4GB 1333 Mhz DDR3 memory)	19V@3.95A (Intel® Core™ i3-2120 CPU with 4GB 1333 Mhz DDR3 memory)

Options

Item	AFL2-15A-H61	AFL2-W15B-H61
Panel Mounting Kit	N/A	AFL2PK-W15B
Wall Mounting Kit	AFLWK-19B	
Rack Mounting Kit	N/A	AFL2RK-W15B
Arm	ARM-11-RS/ARM-31-RS	
Stand	STAND-A21-R10/ STAND-C19-R10/ STAND-210-R11	
Hybrid Card Reader	AFL2P-15AMSI-U-R10	AFL2P-W15BMSI-U-R10
Magnetic Stripe Reader	AFL2P-15AMSR-U-R10	AFL2P-W15BMSR-U-R10
Bluetooth Module Kit	AFL2-BT-KIT01-R11	
Trusted Platform Module (TPM)	TPM-IN01-R11	
EM RFID Reader	AFL2-EM-RFID-KIT01-R10	
Mifare RFID Reader	AFL2-MF-RFID-KIT01-R11	
OS: Win XPE (2GB CF Card)	AFL2CF-15A-H61-XPE-2G-R10	
OS: Win XPE (4GB CF Card)	AFL2CF-15A-H61-XPE-4G-R10	
OS: Linux (2GB CF Card)	AFL2CF-15A-H61-LNX-2G-R10	
OS: Win 7 Embedded (4GB CF Card)	AFL2CF-15A-H61-WES7P-4G-R10 (for Projected Capacitive Touch) AFL2CF-15A-H61-WES7E-4G-R10 (for Resistive Touch)	

Packing List

Item	P/N	Q'ty	Description
Utility CD	7B000-000957-RS	1	drivers and user manual
One Key Recovery CD	7B000-000781-RS	1	
Power Adapter	63040-010090-020-RS	1	FSP090-D2BA1; 90~264VAC input; 90W; 19VDC output
Power Cord	32702-000401-100-RS	1	European, 1500mm
Power Transfer Cord	32702-000300-100-RS	1	
RJ-45 to DB-9 COM Port Cable	32005-000200-200-RS	1	
IR Remote Controller	7Z000-SLPCB005-RS	1	
M3 Screw Pack	44013-030041-RS	4	M3 x 4 for securing HDD
M4 Screw Pack	44033-040061-RS	4	M4 x 4 for VESA screw
Temperature Sensor Cable	32133-004300-100-RS	1	
Pen	43125-0002C0-00-RS	1	For Resistive Touch

Ordering Information

AFL2-15A-H61

Part No.		Description
Core i5	AFL2-15A-H61-i5/R-R11	15" 400cd/m² XGA panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen,2M camera, microphone, R11
	AFL2-15A-H61-i5/PC-R11	15" 400cd/m² XGA panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen,2M camera, microphone, R11
Core i3	AFL2-15A-H61-i3/R-R11	15" 400cd/m² XGA panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen,2M camera, microphone, R11
	AFL2-15A-H61-i3/PC-R11	15" 400cd/m² XGA panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2) 802.11b/g/n wireless module, projected capacitive touchscreen,2M camera, microphone, R11
Pentium	AFL2-15A-H61-P/R-R11	15" 400cd/m² XGA panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen,2M camera, microphone, R11
	AFL2-15A-H61-P/PC-R11	15" 400cd/m² XGA panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen,2M camera, microphone, R11

AFL2-W15B-H61

Part No.		Description
Core i5	AFL2-W15B-H61-i5/R-R11	15.6" 300cd/m² HD panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R11
	AFL2-W15B-H61-i5/PC-R11	15.6" 300cd/m² HD panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R11
Core i3	AFL2-W15B-H61-i3/R-R11	15.6" 300cd/m² HD panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R11
	AFL2-W15B-H61-i3/PC-R11	15.6" 300cd/m² HD panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R11
Pentium	AFL2-W15B-H61-P/R-R11	15.6" 300cd/m² HD panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R11
	AFL2-W15B-H61-P/PC-R11	15.6" 300cd/m² HD panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R11

Function Keys

Fn	Fn		
	Backlight On/Off	Fn +	RFID enable / disable
	Audio -	Fn +	Audio mute
	Audio +	Fn +	Camera enable / disable
	Brightness -	Fn +	Front side Mini USB& MicroSD enable / disable
	Brightness +	Fn +	Power on / off

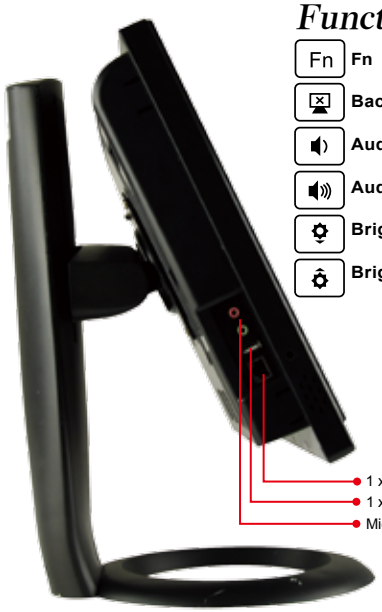

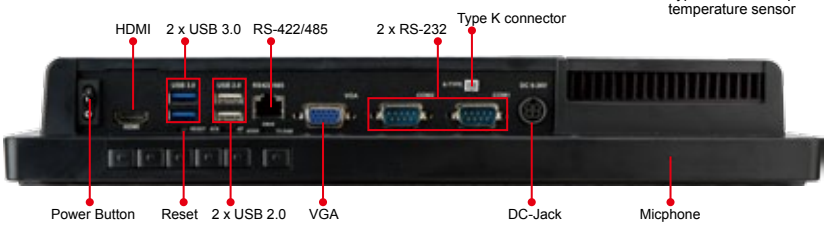

AFL2-15A-H61 Dimensions

(Unit: mm)

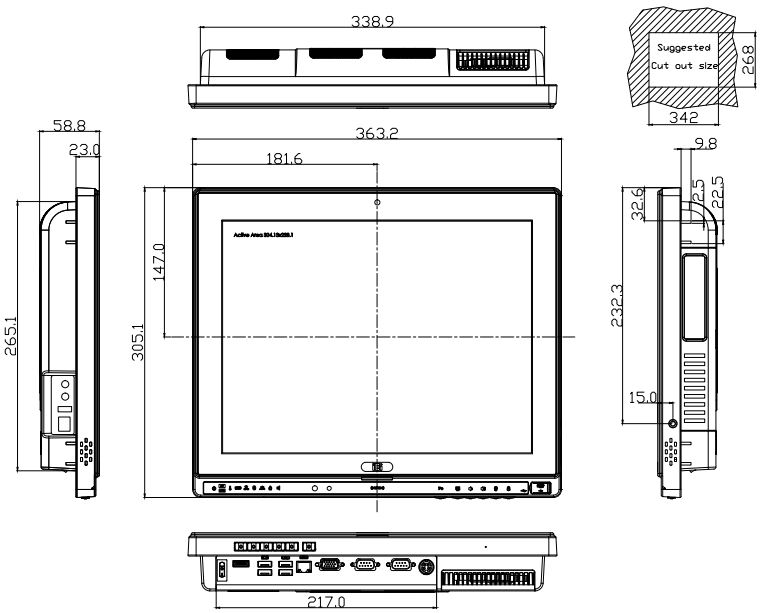

AFL2-W15B-H61 Dimensions

(Unit: mm)

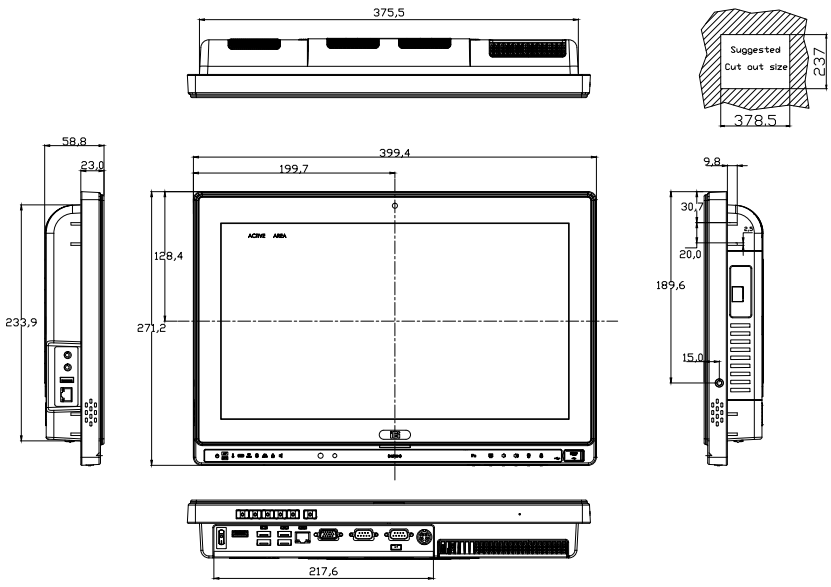

15.6" Wide Panel PC

AFL2-W15A-N270

Intel® Atom™ N270 Processor

Features

- Flat-bezel LCD with LED backlight
- Intel® Atom™ processor N270 1.6 GHz processor
- one 400 MHz or 533 MHz DDR2 SO-DIMM (max. 2GB)
- Projected capacitive type flat touch screen/ Resistive type 5-wire flat touch screen supported
- Wi-Fi 802.11b/g/n supported
- Optional EM or Mifare RFID reader
- Built-in 2 M pixels webcam
- Built-in two 1.5W speakers and microphone
- IP 64 compliant front panel

Specifications

	Model	AFL2-W15A-N270	
LCD Specifications	Size	Wide 15.6" TFT LCD	
	Resolution	1366 x 768	
	Brightness (cd/m²)	300	
	Contrast Ratio	500:1	
	LCD Color	16.7M	
	Pixel Pitch (mm)	0.252 (H) x 0.252 (V)	
	Viewing Angle (H-V)	170° (H) / 160° (V)	
	Backlight MTBF	50000 hrs (LED backlight)	
Touch	Touch Screen	5-wire rsistive type with RS232 interface / projected capacitive type with USB interface	
	Touch Controller	PenMount DMC9000 / EETI EXC7200 & EXC5404	
System	CPU	Intel® Atom™ processor N270 1.6 GHz CPU	
	Chipset	Intel® 945GSE + ICH7M	
	RAM	Support one 400 MHz or 533 MHz DDR2 SO-DIMM (max. 2GB)	
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0	
	Audio Codec	Realtek ALC888 HD Audio codec	
	Storage	CF Type II 1 x 2.5" SATA HDD Bay	
	Watchdog Timer	Software programmable supports 1~255 sec. system reset	
	Input / Output	1 x RS-232 COM port 1 x RS-232/422/485 COM port 1 x RJ-45 for GbE LAN 2 x USB 2.0 1 x Power switch 1 x Reset button	1 x Audio port (Line out) 1 x VGA 1 x Power jack 1 x External SATA
Other Features	Audio	AMP 1.5 W + 1.5 W (internal speaker)	
	Camera	2 M pixels with low light function	
	RFID Reader	EM 125 KHz or Mifare 13.56 MHz card reader (optional)	
	OSD Function	LCD on/off, brightness up/down, volume up/down	
	Ambient Light Sensor	Yes	
	Infrared Remote Controller	LCD on/off, brightness up/down, volume up/down	
	Touch Screen	Projected capacitive type flat touch screen/ Resistive type 5-wire flat touch screen	
Connectivity	Wireless	IEEE 802.11b/g/n 2T2R module (WIFI-RT5392-SB-R10)	
Physical	Construction Front Panel	PC + ABS plastic front frame	
	Mounting	VESA 100 mm x 100 mm	
	Color	Black C	
	Dimensions (WxHxD) (mm)	400 x 267 x 54	
	Weight (N/G)	3.8 kg	
Environment	Operating Temperature (°C) (Ambient with air flow)	-10°C ~ 50°C	
	Storage Temperature (°C)	-20°C ~ 60°C	
	Humidity	10% to 95% (non-condensing)	
	IP Level	IP 64 compliant front panel	
	Safety & EMI	CE / FCC	
Power	Power Supply	60W power adapter Input: 90VAC~264VAC, 50/60 Hz Output: 12VDC	
	Power Requirement	12VDC	
	Power Consumption	12V@4.25A (Intel® Atom™ N270 CPU with 667MHz 2GB DDR2 memory)	

AFL2-W15A Dimensions (Unit: mm)

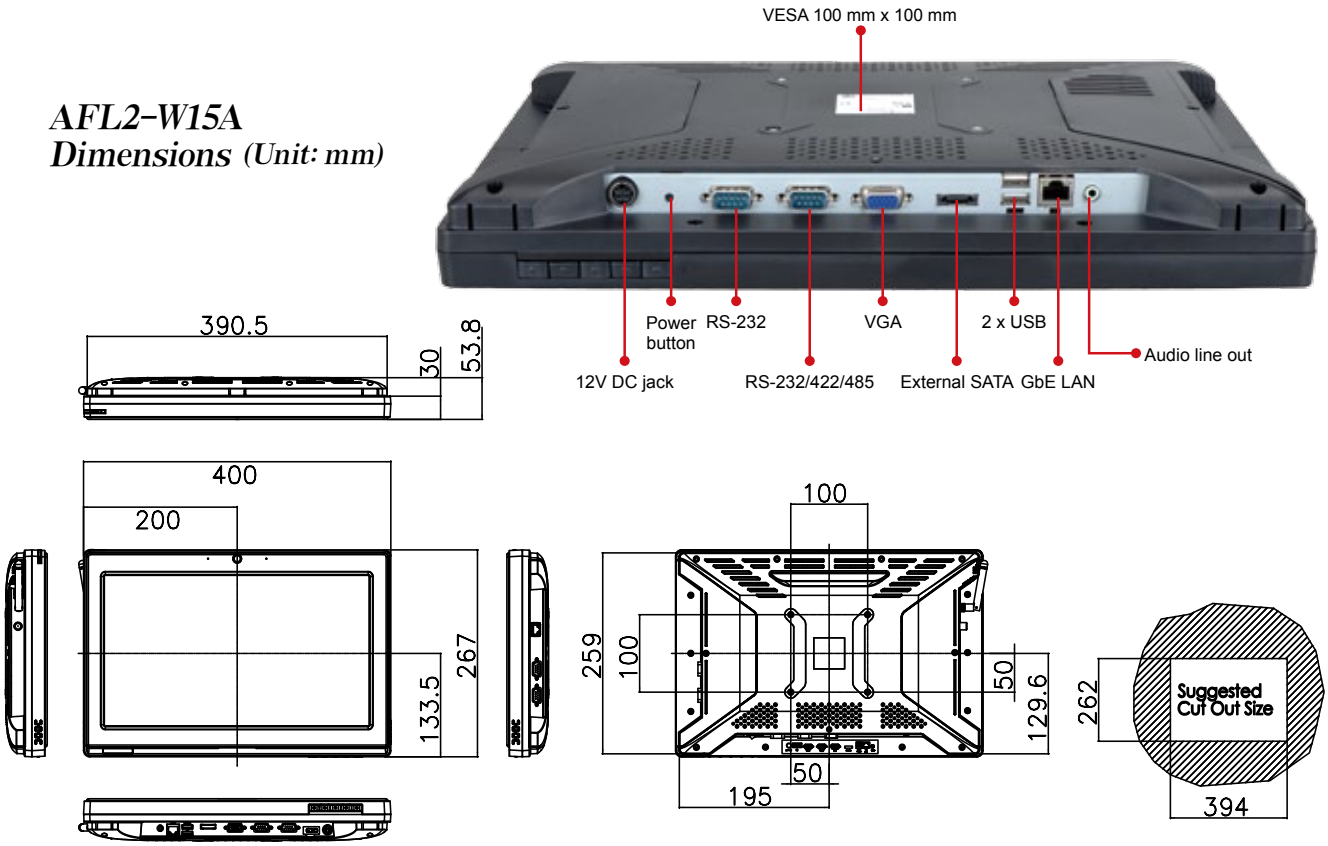

Optional Kit

Options		AFL2-W15A-N270
Panel Mounting Kit		AFL2PK-W15A-R10
Wall Mounting Kit		AFLWK-19B
Arm		ARM-11-RS / ARM-31-RS
Stand		STAND-A19-RS / STAND-A21-R10 / STAND-C19-R10 / STAND-210-R11
EM RFID Reader		AFL2-EM-RFID-KIT02-R10
Mifare RFID Reader		AFL2-MF-RFID-KIT03-R10
OS	Win CE 6.0	AFL2CF-W15-N270-CE060-R10 (128 MB CF card)
	Win XPE	AFL2CF-W15-N270-XPE-R10 (1 GB CF card)
	Linux	AFL2CF-W15-N270-LNX-R10 (2 GB CF card)
	Win 7	AFL2CF-W15-N270-WES7E-R20 / AFL2CF-W15-N270-WES7P-R20 (4 GB CF card)
		AFL2SD-W15-N270-WES7E-R20 / AFL2SD-W15-N270-WES7P-R20 (4 GB SATA SSD module)
DC 12 V Input UPS		AUPS-B10-R10 (VESA 100, DC 12 V input, 12 V output 100 W UPS module with 3800 mAH)
DC 9~36 V Input UPS		AUPS-B20-R10 (VESA 100, DC 9~36 V input, 12 V output 100 W UPS module with 3800 mAH)

Packing List

Item	P/N	Q'ty	Specifications
Touch Pen	43125-0002C0-00-RS	1	
Power Adapter	63000-FSP060DBAB1554-RS (for Intel® N270 platform)	1	90-264 VAC input , 12 VDC output , 60W 90-264 VAC input , 12 VDC output , 84W
Power Cord	32000-000002-RS	1	1750 mm; European standard
User's Manual CD	7B000-000087-RS	1	
Screws	44013-030041-RS	4	
Remote Controller	7Z000-8T00320ICP05G-RS	1	

Touch Pen

Model No.:43125-0002C0-00-RS
Description:
1) With special material
2) Combined soft rubber with anti-oxidative plastic material
3) Durable and flexible
4) Particularly designed for AFOLUX II touch
5) Pen Length: 140mm

Ordering Information

Part No.		Description
Resistive Type Touch	AFL2-W15A-N270/R/1G-R20	15.6" 300cd/m² WXGA+ fanless panel PC with Intel® Atom™ N270 1.6 GHz, 802.11b/g/n wireless module, resistive touch screen, 2 M camera, microphone, 1GB DDR2 RAM, without expansion, R20
Projected Capacitive Type Touch	AFL2-W15A-N270/PC/1G-R20	15.6" 300cd/m² WXGA+ fanless panel PC with Intel® Atom™ N270 1.6 GHz, 802.11b/g/n wireless module, projected capacitive touchscreen, 2 M camera, microphone, 1GB DDR2 RAM, without expansion, R20

AFL2-17A-H61

Intel® Core™ i7/i5/i3 and Pentium® processor

AFL2-W19A-H61

Intel® Core™ i7/i5/i3 and Pentium® processor

AFL2-17A-H61

Optional CD-ROM available

Features

- Programmable colorful LED light bar
- Intel® Core™ i5/ i3 and Pentium® processor
- Two 204-pin DDR3 SO-DIMM slot (system max. 16GB) preinstalled with 4GB (2GB x 2)
- Projected capacitive touchscreen and 5-wire resistive type touchscreen supported
- Wi-Fi 802.11b/g/n 2T2R high speed wireless
- EM or Mifare RFID reader
- Built-in 2-megapixel webcam with AF, AE and AWB capabilities
- Built-in two 2W speakers and microphone
- IP 64 compliant front panel
- Auto dimming control
- Light fanless design
- Type K thermocouple temperature sensor
- Wide range 9~36 VDC input

Specifications

Model		AFL2-17A-H61	AFL2-W19A-H61
LCD Specifications	Size	17" (4:3)	W18.9" (16:10)
	Resolution	1280 (W) x 1024 (H)	1440 (W) X 900 (H)
	Brightness (cd/m²)	350	250
	Contrast Ratio	1000:1	1000:1
	LCD Color	16.7M	16.7M
	Pixel Pitch (mm)	0.264 (H) x 0.264 (V)	0.2835 (H) x 0.2835 (V)
	Viewing Angle (H-V)	170° / 160°	170° / 160°
	Backlight MTBF	50,000 (LED backlight)	30,000 (LED backlight)
Touch	Touch Screen	5-wire rsistive type with RS-232 interface / projected capacitive type with USB interface	
	Touch Controller	PenMount DMC9000 / EETI EXC7200 & EXC5404	
System	CPU	2nd/3rd Generation Intel® Core™ i7/i5/i3 and Pentium® processors	
	Chipset	Intel® H61	
	RAM	Support two 204-pin DDR3 SO-DIMM slot (max. 16GB) preinstalled with 4GB (2GB x 2)	
	Ethernet	Realtek RTL8111E PCIe GbE controller supporting ASF 2.0	
	Audio Codec	Realtek ALC892 HD Audio codec	
	HDD	2.5" SATA 3Gb/s HDD bay	
	CD-ROM	1 x Slim Type CD-ROM bay	
	Input / Output	2 x RS-232 (DB-9 connector) 1 x RS-422/485 (DB-9 connector) 2 x GbE LAN (one on the bottom, one on the left) 2 x USB 3.0 3 x USB 2.0 (two on the bottom, one on the left) 1 x Mini USB port on front panel 1 x MicroSD card slot on front panel 1 x Line out (on the left)	1 x Mic (on the left) 1 x VGA port (DB-15 connector) 1 x HDMI port 1 x Power switch 1 x AT/ATX switch 1 x Reset button 1 x Clear CMOS button 1 x 9 ~ 36V DC input jack 1 x Type K connector
	Expansion Interface	1 x PCIe Mini slot reserved	
Other Features	Audio	AMP 2W + 2W (internal speaker)	
	Camera	2 M pixels with low light function	
	RFID Reader	EM 125 KHz or Mifare 13.56 MHz card reader (optional)	
	MSR Card Reader	MSR card reader (optional)	
	TPM	Reserved by pin-header	
	OSD Function	LCD on/off, brightness up/down, volume up/down, Hot Key	
	Ambient Light Sensor	Yes	
	Infrared Remote Controller	Yes	
	LED Light Bar	Yes	
	System Cooling	Light fanless (smart fan operates above default temperature setting)	
Connectivity	Wireless	IEEE 802.11b/g/n 2T2R module (WIFI-RT5392-SB-R10)	
	Bluetooth	Bluetooth V2.0+EDR with USB interface (optional)	
Physical	Construction Front Panel	PC + ABS Plastic	
	Mounting	Panel, Wall, Rack, Stand, Arm VESA 100mm x 100mm	Panel, Wall, Stand, Arm VESA 100mm x 100mm
	Color	Black	
	Dimensions (WxHxD)(mm)	418 x 378 x 65	488 x 361 x 65
	Weight (N/G)	6.9 kg / 9.0 kg	7.3 kg / 10 Kg
Environment	Operating Temperature (°C) (Ambient with air flow)	-20°C ~ 50°C	-20°C ~ 40°C
	Storage Temperature (°C)	-20°C ~ 60°C	
	Humidity	10% to 95% (non-condensing)	
	IP Level	IP 64 compliant front panel	
	Safety&EMC	CE / FCC	
Power	Power Supply	120W power adapter , Input:100 V AC ~ 240 V AC, 50 / 60Hz, Output: 19 V DC	
	Power Requirement	9 ~ 36 VDC	
	Power Consumption	19V@5.3A (Intel® Core™ i3-2100T CPU with 4GB 1333 Mhz 4GB DDR3 memory)	19V@5.58A (Intel® Core™ i3-2100T CPU with 4GB 1333 Mhz 4GB DDR3 memory)

Ordering Information

AFL2-17A-H61/AFL2-17AB-H61

LED Bar	Model	Description
LED Bar	AFL2-17A-H61-i5/R-R12	17" 350cd/m² SXGA panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R12
	AFL2-17A-H61-i5/PC-R12	17" 350cd/m² SXGA panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R12
	AFL2-17A-H61-i3/R-R12	17" 350cd/m² SXGA panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R12
	AFL2-17A-H61-i3/PC-R12	17" 350cd/m² SXGA panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R12
	AFL2-17A-H61-P/R-R12	17" 350cd/m² SXGA panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R12
	AFL2-17A-H61-P/PC-R12	17" 350cd/m² SXGA panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R12
Without LED Bar	AFL2-17AB-H61-i5/R-R12	17" 350cd/m² SXGA panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, without LED bar, R12
	AFL2-17AB-H61-i5/PC-R12	17" 350cd/m² SXGA panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, without LED bar, R12
	AFL2-17AB-H61-i3/R-R12	17" 350cd/m² SXGA panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2) 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, without LED bar, R12
	AFL2-17AB-H61-i3/PC-R12	17" 350cd/m² SXGA panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, without LED bar, R12
	AFL2-17AB-H61-P/R-R12	17" 350cd/m² SXGA panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, without LED bar, R12
	AFL2-17AB-H61-P/PC-R12	17" 350cd/m² SXGA panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, without LED bar, R12

Options

Item	AFL2-17A-H61	AFL2-W19A-H61
Panel Mounting Kit	AFL2PK-17A	AFL2PK-W19A
Wall Mounting Kit	AFLWK-19B	
Rack Mounting Kit	AFL2RK-17A	N/A
Arm	ARM-31-RS	
Stand	STAND-A19-RS/STAND-A21-R10/STAND-C19-R10/STAND-210-R11	
Hybrid Card Reader	AFL2P-W19AMSI-U-R10	
Magnetic Stripe Reader	AFL2P-W19AMSR-U-R10	
Slim DVD Burner	AFL2-DVD-KIT01-R10	
Bluetooth Module Kit	AFL2-BT-KIT01-R11	
Trusted Platform Module (TPM)	TPM-IN01-R11	
EM RFID Reader	AFL2-EM-RFID-KIT01-R10	
Mifare RFID Reader	AFL2-MF-RFID-KIT01-R11	
OS: Win XPE (CD-ROM)	AFL2-17A-H61-XPE-R10	AFL2-W19A-H61-XPE-R10
OS: Linux (CD-ROM)	AFL2-17A-H61-LNX-R10	AFL2-W19A-H61-LNX-R10
OS: Win 7 Embedded (DVD-ROM)	AFL2-17A-H61-WES7P-R10 (for Projected Capacitive Touch) AFL2-17A-H61-WES7E-R10 (for Resistive Touch)	AFL2-W19A-H61-WES7P-R10 (for Projected Capacitive Touch) AFL2-W19A-H61-WES7E-R10 (for Resistive Touch)

Ordering Information

AFL2-W19A-H61/AFL2-W19AB-H61

LED Bar	Model	Description
LED Bar	AFL2-W19A-H61-i5/R-R11	18.9" 250cd/m² WXGA+ panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R11
	AFL2-W19A-H61-i5/PC-R11	18.9" 250cd/m² WXGA+ panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R11
	AFL2-W19A-H61-i3/R-R11	18.9" 250cd/m² WXGA+ panel PC, Core i3 Dual Core 2xxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R11
	AFL2-W19A-H61-i3/PC-R11	18.9" 250cd/m² WXGA+ panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R11
	AFL2-W19A-H61-P/R-R11	18.9" 250cd/m² WXGA+ panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, R11
	AFL2-W19A-H61-P/PC-R11	18.9" 250cd/m² WXGA+ panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, R11
Without LED Bar	AFL2-W19AB-H61-i5/R-R11	18.9" 250cd/m² WXGA+ panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, without LED bar, R11
	AFL2-W19AB-H61-i5/PC-R11	18.9" 250cd/m² WXGA+ panel PC, Core i5 Dual Core 2xxxT CPU (Above 2.7GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, without LED bar, R11
	AFL2-W19AB-H61-i3/R-R11	18.9" 250cd/m² WXGA+ panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, without LED bar, R11
	AFL2-W19AB-H61-i3/PC-R11	18.9" 250cd/m² WXGA+ panel PC, Core i3 Dual Core 2xxxT CPU (Above 2.5GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, without LED bar, R11
	AFL2-W19AB-H61-P/R-R11	18.9" 250cd/m² WXGA+ panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, resistive touch screen, 2M camera, microphone, without LED bar, R11
	AFL2-W19AB-H61-P/PC-R11	18.9" 250cd/m² WXGA+ panel PC, Pentium Dual Core G6xxT CPU (Above 2.2GHz), TDP 35W, 2GB DDR3 (2GB x 2), 802.11b/g/n wireless module, projected capacitive touchscreen, 2M camera, microphone, without LED bar, R11

Packing List

Item	P/N	Q'ty	Description
Utility CD	7B000-000956-RS	1	drivers and user manual
One Key Recovery CD	7B000-000781-RS	1	
Power Adapter	63000-FSP120AAB-RS	1	FSP120-AAB;90~264VAC input ; 120W ;19VAC output
Power Cord	32702-000401-100-RS	1	European, 1500mm
Power Transfer Cord	32000-089400-RS	1	
Infrared Remote Controller	7Z000-SLPCB005-RS	1	
M3 Screw Pack	44013-030041-RS	4	M3 x 4 for securing HDD
M4 Screw Pack	44033-040061-RS	4	M4 x 4 for VESA screw
I/O Bracket	41013-0290C2-00-RS	1	I/O Bracket
Temperature Sensor Cable	32133-004300-100-RS	1	
Pen	43125-0002C0-00-RS	1	For Resistive Touch

CD-RW/DVD-RW Driver Spec.

The drive is able to write CD-R/RW disks, DVD+R/RW disks and DVD-R/RW disks

Drive Type	Internal Slim CD-RW/DVD Combo Drive	
Data Transfer Rate	Write: DVD+R/DVD+RW/DVD-R: 8X DVD-RW: 6X CD-R/CD-RW: 24X	Read: DVD-ROM: 8X CD-ROM: 24X
Interface	SATA	
Buffer Memory	2MB	

Function Keys

Fn	Fn
Backlight On/Off	Fn + Backlight On/Off: RFID enable / disable
Audio -	Fn + Audio -: Audio mute
Audio +	Fn + Audio +: Camera enable / disable
Brightness -	Fn + Brightness -: Front side Mini USB&MicroSD enable / disable
Brightness +	Fn + Brightness +: Power on / off

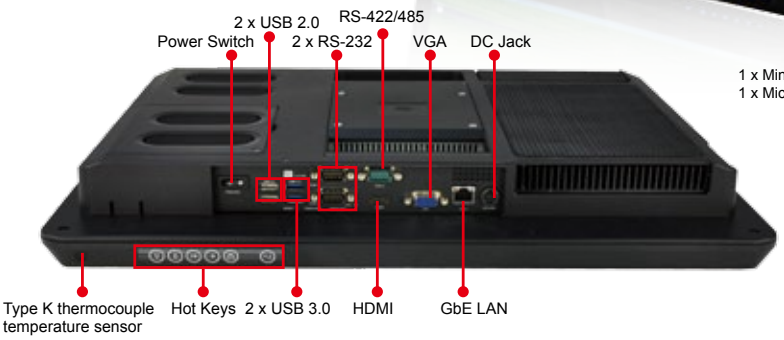

AFL2-17A-H61 Dimensions

(Unit: mm)

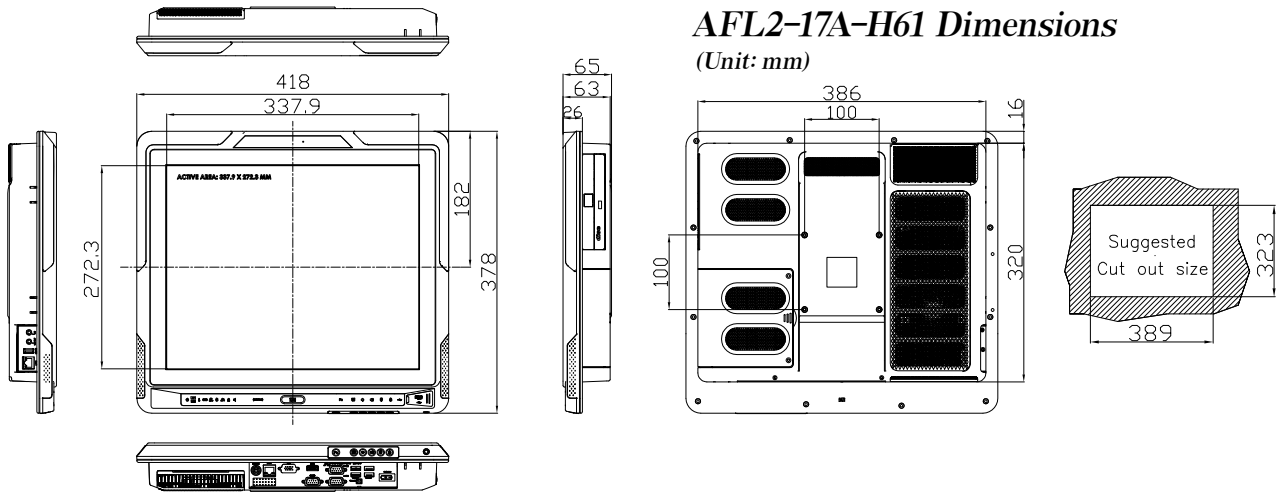

AFL2-W19A-H61 Dimensions

(Unit: mm)

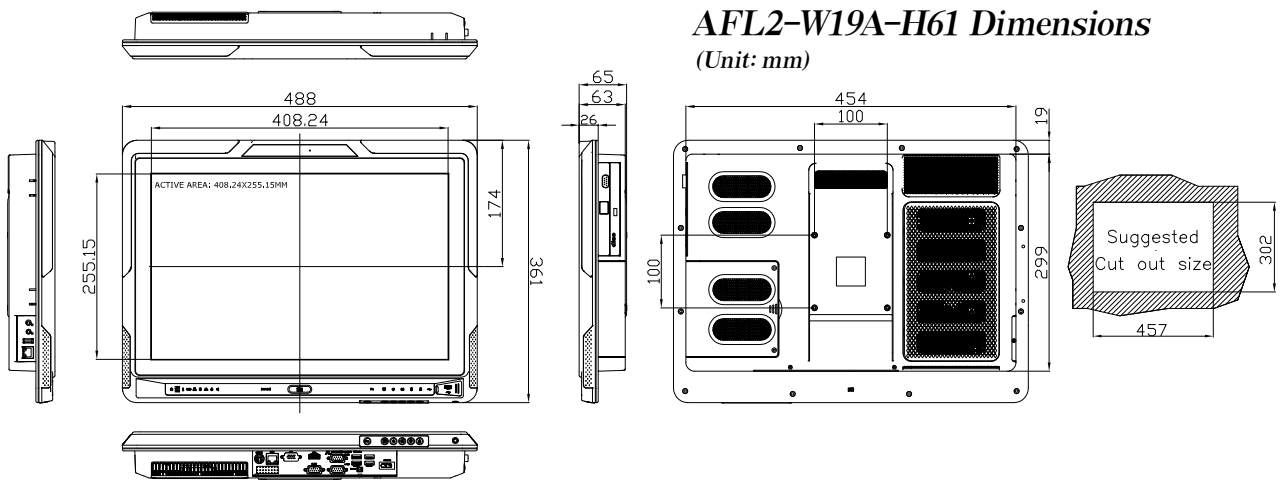

AFOLUX Panel PC

- 5.7"~19" multi-functional all-in-one Panel PCs
- Streamlined plastic housing
- Water and dust resistance IP 64 front panel protection
- Industrial grade operating temperature

AFOLUX PPC

Affordable Luxury for You~

AFOLUX is designed to provide versatile, cost-effective solutions to meet the growing demand emerging from semi-industrial computing markets. From clinical to factory environments, restaurants to schools, and entertainment to surveillance devices, AFOLUX is your ultimate choice to fulfill a wide spectrum of applications.

AFOLUX PPC Diverse Platform and Panel Size

	5.7”	W7”	8.0”	8.4”	W10.2”	10.4”	12.1”
AMD LX800	AFL-057A-LX	AFL-07A-LX	AFL-08AH-LX			AFL-10A-LX	AFL-12A-LX
Intel® Atom™ N270/Z510/Z530/ E620	AFL-057A-Z510 AFL-057A-Z530	AFL-07A-N270	AFL-F08A-N270 AFL-08B-N270	AFL-08AH-N270	AFL-W10A-N270	AFL-10A-N270	AFL-12A-N270

	15”	W15.6”	17”	19”	W19”
Intel® Atom™ N270	AFL-15A-N270	AFL-W15A-N270	AFL-17D-N270		AFL-W19A-N270
Intel® GM45		AFL-W15A-GM45	AFL-17D-GM45		
Intel® HM55	AFL-15i-HM55		AFL-17i-HM55	AFL-19i-HM55	

AFOLUX PPC MAIN FEATURES

A. IP 64 Water and Dust Proof Protection

The AFOLUX front panel is IP64 compliant which protects the screen against damage from liquid or dust. Extend the lifetime of your products!



B. Variety Multimedia Functions

Low Light Camera, Microphone and Speaker

High resolution video camera

Sensitive Microphone

Built-in stereo speakers

Models	Camera	Microphone	Speakers
AFL-15i/17i/19i-HM55	--	--	Amplified
AFL-F08A/08B/W10A-N270 AFL-408A/412A	300K pixels with low light	Digital microphone	Amplified 1.5W + 1.5W
AFL-W15A/17D/W19A AFL-W15A/17D/W19A	300K pixels with low light	Digital microphone	Amplified 3W + 3W
AFL-057A/07A/08AH/10A/12A-LX	--	--	Amplified 1.5W + 1.5W
AFL-07A/08AH/10A/12A/15A-N270 AFL-408B-W410A-N270 AFL-057A-Z510/Z530	--	--	Amplified 1.5W + 1.5W

HD Hardware Decoder and HDMI Output

Integrated Radeon HD3200 graphic core supports UVD– VC-1, MPEG2, and H.264/AVC full HD decoder. Through HDMI output to HD-SDI-BOX-kit, HD content can be transmitted up to 100 meters for a long distance digital signage application.

Models	HD Hardware Decoder	HDMI output
AFL-15i/17i/19i-HM55	--	V
AFL-W15A/17D/W19A	--	V
AFL-057A-Z510/Z530	V	--

AFL-W15A-L325 with S780E/T + SB710	
Graphic Core	Radeon 3200
DirectX Support	DX10
Video Decode	UVD-VC-1, MPEG2, H.264/AVC Full HD Decode
HDMI/DVI	1080p

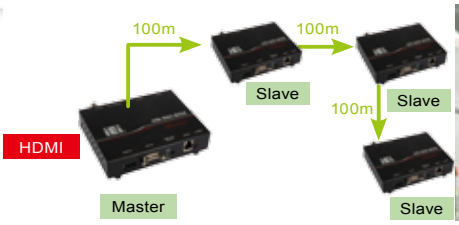

HD-SDI-BOX kit

Shopping Mall Digital Signage Broadcasting

C. LED Backlight Panel Equipped

Enhancement of image quality on LCD screen

- Wider color gamut
- More even screen illumination
- Longer display life
- Low temperature operation and greater power efficiency

Color Gamut Comparison



LED
Normal CCFL

Vivid and High Contrast Image

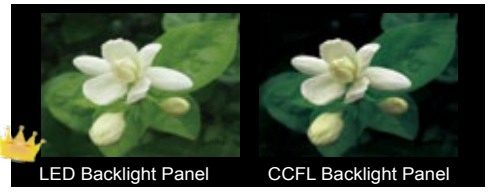

Thus LED backlight makes the image color shown on the LCD screen look nature and vivid.

D. Power over Ethernet Enabled

No need for electricians to install conduit, electrical wiring, and outlets throughout the enterprise.

Panel Size	5.7”
Solution Models	AFL-057A-Z510 AFL-057A-Z530

Saving Deployment Costs

IPS-2040P
Industrial PoE Ethernet Switch

E. Wireless Capabilities

Local-based Communication

Easy to deploy, no network cables is needed. Reduce your setup cost and lead time.

802.11b/g



Streaming music
Streaming video

802.11n

No spaces in between items:
VoIP/Gaming/NAS

Peripheral Communication

It is easy to operate and connect input devices and peripherals when the Panel PC is mounted to a rack or a kiosk.

Long-range Mobile Communication

High mobility without any hot spot limitation.

Real-Time Data Communication



Cellular Network

	Wi-Fi	Bluetooth (optional)
AFL-15i/17i/19i-HM55	IEEE 802.11b/g/n	Bluetooth V2.1+EDR
AFL-W15A/17D/W19A	IEEE 802.11b/g/n	Bluetooth V2.0
AFL-07A/08AH/F08A/08B/W10A-N270 AFL-408A/408B-N270	IEEE 802.11b/g/n	Bluetooth V2.0
AFL-W15A/17D/W19A/W19B-N270 AFL-10A/12A/15A-N270 AFL-W410A/412A/415A-N270	IEEE 802.11b/g/n	Bluetooth V2.0
AFL-057A-Z510/Z530 AFL-057A/07A/08AH-LX	IEEE 802.11 b/g	Bluetooth V2.0
AFL-10A/12A-LX	IEEE 802.11 b/g	Bluetooth V2.0

F. Auto Dimming and OSD Remote Control

Built-in Ambient Light Sensor

- Power Consumption Saving
- Comfortable Viewing Brightness
- Extend Product Lifetime

Ambient Light Sensor

Day: Higher Ambient Luminance

Night: Lower Ambient Luminance

OSD Remote Control

Brightness and volume control wherever the system is located.

Models	Hardware OSD Control	OSD Remote Control	Ambient Light Sensor
AFL-15i/17i/19i-HM55	5-Key Keypad	V	V
AFL-F08A-N270	6-Key Keypad	V	
AFL-W15A/W19A	7-Key Keypad	V	V
AFL-15C/17C/19C-965	5-Key Keypad	--	--
AFL-408A/408B/W410A/412A/415A-N270	--	V	V
AFL-17D	5-Key Keypad	--	--

G. Multiple and Expandable Storage



	CF card	SATA Slim SSD	2.5" SSD	Hard Disk	Optical Disk
Cost	High	High	High	Medium	Low
Data Transfer Rate	Read-40MB/sec. Write-20MB/sec.	Read-90MB/sec. Write-60MB/sec.	Read-230MB/sec. Write-160MB/sec.	Read-110MB/sec. Write-110MB/sec.	Read-32.4MB/sec. Write-10MB/sec.
Capacity	128MB~16GB	1GB~16GB	8GB~128GB	80GB~1TB	680MB~50GB
Application	Operating System, Application Program	Operating System, Application Program	Operating System, Application Program	Operating Data, Media Data	Media Data, Backup Data…

Models	CF Card	SATA Slim SSD	2.5" Storage Bay	Slim Type ODD
AFL2-W15A-N270	V	V	V	--
AFL-15i/17i/19i-HM55	--	V	V	--
AFL-17D	V	V	V	V
AFL-W15A/W19A	V	V	V	--
AFL-057A-Z510/Z530 AFL-07A/08AH/F08A/08B/ W10A-N270 AFL-408A/408B/W410A-N270 AFL-057A/07A/08AH/10A-LX	V	--	--	--
AFL-10A/12A/15A-N270 AFL-412A	V	V	V	--
AFL-12A-LX	V	--	V (IDE Interface)	--

H. Optional Magnetic Stripe Card / Smart Card Reader

(1) Magnetic Stripe Reader

(2) Hybrid Card Reader


Magnetic Card
IC Card
iButton
Smart Card Reader
iButton
The iButton can be used to store cash for small transactions or as an electronic asset tag to store and track information such as valuable capital equipment.
Magnetic Card Reader

P/N	AFLP-12BMSR-U / AFLP-17AMSR-U	AFLP-12BMSI-U / AFLP-17AMSI-U
General	90 mm Magnetic Stripe Reader Programming: By Software Download Program Card Standard: ANSI , ISO , ABA Track Read: ISO 1,2,3 (IATA,ABA,THRIFT/ MINTS), JISII100-1000mm/sec	(1) Magnetic Card: ISO 7811, AAMVA, DMV, JIS II (2) Smart Card: ISO 7816, EMV (3) Dallas iButton
Electrical	Voltage:DC+5V, +/-5% Reading Indicator:Beeper	Voltage: DC+5V,+/-5% Reading Indicator:Beeper
Environment	Operating Temperature: 0°C to 40°C Relative Humidity: 20% to 85 % (Non-condensing)	Operating Temperature: -10°C to 55°C Relative Humidity: 10% to 90 % (Non-condensing)
Physical	Cable: Straight 2.5ft Weight: Approx.61g	Cable: Straight 2.5ft Weight: Approx.60g
Interface	USB	USB

I. OSD Control Software

IEI patented system software utility allows users to adjust system settings through the software interface in Windows environment instead of pressing the membrane keypad below the front panel.

J. Selectable AT/ATX Power Mode

AT Power Mode

Applications

- ATM
- Self-service kiosk
- Plant environment monitoring system
- Factory automation platform
- Manufacturing shop flow

Advantages

- Easy to turn on/off with wall/ panel mounting
- Automatic start when power connected

With the AT mode selected, the power is controlled by a central power unit rather than a power switch. The AFOLUX PPCs turns on automatically when the power is connected.

ATX Power Mode

Applications

- Security surveillance
- Advertising terminal

Advantages

- Power management
- Remote control via network advantage

With the ATX mode selected, the AFL series panel PC goes in a standby mode when it is turned off. The panel PC can be easily turned on via network or a power switch in standby mode. Remote power control is perfect for advertising applications since the broadcasting time for each panel PC can be set individually and controlled remotely.

Convenient Power Mode Setting

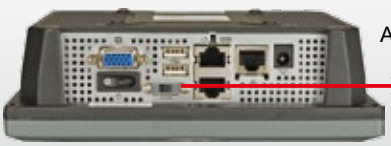

AT/ATX switch on the rear panel



AT/ATX switch is located at the bottom right on the aluminum chassis

AFOLUX 5.7”~8” Selection Guide

LCD Size		5.7"		7"			8.0"	
Model		AFL-057A-LX	AFL-057A-Z510 AFL-057A-Z530	AFL-07A-LX	AFL-07A-N270	AFL-W07A-N26 (New)	AFL-08B-N270	AFL-F08A-N270
Display	LCD Size	5.7"		Wide 7"			8.0"	
	Max Resolution (WxH)	640 x 480		800 x 480			800 x 600	
	Brightness (cd/m²)	400		500			250	
	Contrast Ratio	300:1		400:1			400:1	
	LCD Color	262K		262K			262K	
	Pixel Pitch (mm) (HxV)	0.06 (H) x 0.18 (V)		0.0635 (H) x 0.1905 (V)			0.2025 (H) x 0.2025 (V)	
	Viewing Angle (H/V)	140°/100°		140°/110°			140°/ 130°	
	Backlight MTBF (hrs)	50000 (LED backlight panel)		50000 (LED backlight panel)			30000 (LED backlight panel)	
Motherboard	CPU	AMD Geode LX800 500MHz Processor	Intel® Atom™ Z530 1.6GHz Processor Intel® Atom™ Z510 1.1GHz Processor	AMD Geode LX800 500MHz Processor	Intel® Atom™ Processor N270 1.6GHz CPU	Intel® Atom™ N2600 dual core 1.6 GHz CPU	Intel® Atom™ Processor N270 1.6GHz CPU	
	Chipset	AMD Geode LX800 + AMD CS5536	Intel® US15W	AMD Geode LX800 + AMD CS5536	Intel® 945GSE + ICH7M	Intel® NM10	Intel® 945GSE + ICH7M	
	RAM	One 200-pin DDR SO-DIMM (max. 1GB)	One 200-pins DDR2 SO-DIMM (max. 2GB)	One 200-pin DDR SO-DIMM (max. 1GB)	One 200-pins DDR2 SO-DIMM (max. 2GB)	One 800 MHz 204-pin DDR3 SO-DIMM slot (max. 2G) pre-installed wiith 2GB	One 200-pin DDR2 SO-DIMM (max. 2GB)	
I/O Ports and Switches		1 x RS-232 COM Port (RJ-45) 1 x RS-232/422/485 COM Port (RJ-45) 1 x RJ-45 for 10/100Mbps LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x VGA Port 1 x Power Jack	1 x RS-232/422/485 COM Port 1 x RJ-45 for GbE supports PoE 802.3af, PoE/PD 1 x USB 2.0 1 x Reset Button 1 x Power Input with Lock 1 x Reset Button	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for 10/100Mbps LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out)	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x External SATA	1 x 9-28V Lockable DC Jack 1 x RJ45 for RS-232 1 x RS-232/422/485 1 x VGA 2 x GbE LAN 2 x USB 2.0 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Line out	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x External SATA	
CF		CF Type II				CF Type II	CF Type II	
Wireless Connection	Wi-Fi	IEEE 802.11 b/g (internal USB)	IEEE 802.11 b/g (internal Mini PCI)	IEEE 802.11 b/g (internal Mini PCI)	IEEE 802.11b/g/n (internal PCIe Mini card)	IEEE 802.11b/g/n (internal PCIe Mini card)	IEEE 802.11b/g/n (internal PCIe Mini card)	
Audio/Video Device	Camera Module	--		--			2-megapixel with Low Light Function	
	Microphone	--		--			yes	
Physical	Dimensions (WxHxD) (mm)	180 x 135 x 55		226 x 140 x 41			234 x 177 x 43	
	Net Gross Weight	0.8 Kg		0.8 Kg		0.6 Kg	0.8 Kg	1.8 Kg
System Cooling		Fanless						
Environment	Operation Temperature	0°C~50°C	-20°C~60°C	0°C~50°C	-10°C~50°C	-10°C~50°C	-10°C~50°C	
	Storage Temperature	-20°C~60°C						
Power Requirement		12 VDC	5 VDC	12 VDC	12 VDC	9-28V DC	12 VDC	

AFOLUX 8”~12.1” Selection Guide

LCD Size		8.4”			Wide 10.2"	10.4"		
Model		**AFL-08AH-LX**	**AFL-08AH-N270**	**AFL-08A-N26**	**AFL-W10A-N270**	**AFL-10A-LX**	**AFL-10A-N270**	**AFL-10A-N26**
Display	LCD Size	8.4 "			Wide 10.2"	10.4"		
	Max Resolution (WxH)	800 x 600			1024 x 600	800 x 600		
	Brightness (cd/m²)	450			400	400		
	Contrast Ratio	600:1			400:1	600:1		
	LCD Color	262K			262K	262K		
	Pixel Pitch (mm) (HxV)	0.213 (H) x 0.213 (V)			0.2175 (H) x 0.2175 (V)	0.264 (H) x 0.264 (V)		
	Viewing Angle (H/V)	160°/140°			140°/ 110°	160°/140°		
	Backlight MTBF (hrs)	50000 (LED backlight panel)			40000	50000 (LED backlight panel)		
Motherboard	CPU	AMD Geode LX800 500MHz Processor	Intel® Atom™ Processor N270 1.6GHz CPU	Intel® Atom™ N2600 dual core 1.6 GHz CPU	Intel® Atom™ Processor N270 1.6GHz CPU	AMD Geode LX800 500MHz Processor	Intel® Atom™ Processor N270 1.6GHz CPU	Intel® Atom™ N2600 dual core 1.6 GHz CPU
	Chipset	AMD Geode LX800 + AMD CS5536	Intel® 945GSE + ICH7M	Intel® NM10	Intel® 945GSE + ICH7M	AMD Geode LX800 + AMD CS5536	Intel® 945GSE + ICH7M	Intel® NM10
	RAM	One 200-pin DDR SO-DIMM socket, (max. 1GB)	One 200-pins DDR2 SO-DIMM (max. 2GB)	One 800 MHz 204-pin DDR3 SO-DIMM slot (Max. 2GB) pre-installed with 2GB	One 200-pins DDR2 SO-DIMM (max. 2GB)	One 200-pin DDR SO-DIMM (max. 1GB)	One 200-pins DDR2 SO-DIMM (max. 2GB)	One 800 MHz 204-pin DDR3 SO-DIMM slot (Max. 2GB) pre-installed with 2GB
I/O Ports and Switches		1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for 10/100Mbps LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out)	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x External SATA	1 x 9-28V lockable DC Jack 1 x RJ-45 for RS-232 1 x RS-232/422/485 1 x VGA 2 x GbE LAN 2 x USB 2.0 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Line out	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x External SATA	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for 10/100Mbps LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out)	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x External SATA	1 x 9-28V lockable DC Jack 1 x RJ-45 for RS-232 1 x RS-232/422/485 1 x VGA 2 x GbE LAN 2 x USB 2.0 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Line out
Drive Bay	HDD	--	--	--	--	--		
	CF	CF Type II		mSATA	CF Type II	CF Type II		
Wireless Connection	Wi-Fi	IEEE 802.11 b/g (internal Mini PCI)	IEEE 802.11b/g/n (internal PCIe Mini card)			IEEE 802.11 b/g (internal Mini PCI)	IEEE 802.11b/g/n (internal PCIe Mini card)	
Audio/Video Device	Camera Module	--	--	--	2-megapixel with Low Light Function	--		--
	Microphone	--	--	--	Yes	--		--
Physical	Dimensions (WxHxD) (mm)	234 x 134 x 42			280 x 186 x 49	276 x 222 x 51		276 x 222 x 51
	Net Gross Weight	0.8 Kg			1.4 Kg	1.4 Kg		
System Cooling		Fanless						
Environment	Operation Temperature	0°C~50°C	-10°C~50°C	-10°C ~50°C	-10°C~50°C	0°C~50°C	-10°C~50°C	-10°C ~50°C
	Storage Temperature	-20°C~60°C						
Power Requirement		12VDC	12VDC	9-28V DC	12VDC	12VDC	12VDC	9-28V DC

AFOLUX 12” ~Wide 15.6” Selection Guide

Intel® Core™ i7/i5/i3

16:9 Wide Screen

LCD Size		12.1”			15”		Wide 15.6"	
Model		AFL-12A-LX	AFL-12A-N270	AFL-12A-N26	AFL-15A(E)-N270	AFL-15i(E)-HM55	AFL-W15A-N270	AFL-W15A-GM45
Display	LCD Size	12.1”			15"		15.6"	
	Max Resolution (WxH)	1024 x 768			1024 x 768		1366 x 768	
	Brightness (cd/m²)	500			400 or 250		300	
	Contrast Ratio	700:1			700:1 or 600:1		500:1	
	LCD Color	262K			262K			
	Pixel Pitch (mm) (HxV)	0.240 (H) x 0.240 (V)			0.297 (H) x 0.297 (V)			
	Viewing Angle (H/V)	160º/160º			160º/140º or 160º/160º		170º/160º	
	Backlight MTBF (hrs)	50000 (LED backlight panel)			50000 (LED backlighting) or 40000		50000 (LED backlighting)	
Motherboard	CPU	AMD Geode LX800 500MHz Processor	Intel® Atom™ Processor N270 1.6GHz CPU	Intel® Atom™ N2600 dual core 1.6 GHz CPU	Intel® Atom™ Processor N270 1.6GHz CPU	Intel® Celeron® M P4500 CPU	Intel® Atom™ Processor N270 1.6GHz CPU	Intel® Celeron® M 575 2.0GHz CPU Intel® Core™2 Duo P8400 2.26GHz Intel® Core™2 Duo T9400 2.53GHz
						Intel® Core™ i7/i5/i3	Intel® 945GSE + ICH7M	Intel® GM45 + ICH9M
	Chipset	AMD Geode LX800 + AMD CS5536	Intel® 945GSE + ICH7M	Intel® NM10	Intel® 945GSE + ICH7M	Intel® HM55	Intel® 945GSE + ICH7M	Intel® GM45 + ICH9M
	RAM	One 200-pin DDR SO-DIMM (max. 1GB)	One 200-pins DDR2 SO-DIMM (max. 2GB)	One 800 MHz 204-pin DDR3 SO-DIMM slot (Max. 2GB) pre-installed wiith 2GB	One 200-pins DDR2 SO-DIMM (max. 2GB)	Two 204-pins DDR3 SO-DIMM (max. 8GB)	One 200-pins DDR2 SO-DIMM (max. 2GB)	Two 200-pins DDR2 SO-DIMM (max. 4GB)
I/O Ports and Switches		2 x RS-232 COM Port (pin 9 with RI, 5V or 12V switch selectable) 1 x RJ-45 for 10/100Mbps LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x RJ-12 for Cash Drawer (12V)	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x External SATA	1 x 9-28V lockable DC Jack 1 x RJ-45 for RS-232 1 x RS-232/422/485 1 x VGA 2 x GbE LAN 4 x USB 2.0 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Line out	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x VGA (DB-15)	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x VGA (DB-15) 1 x HDMI Port	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x VGA (DB-15)	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x VGA (DB-15) 1 x HDMI Port
Drive Bay	HDD	1 x 2.5” IDE HDD bay	1 x 2.5” SATA HDD bay	1 x 2.5” SATA HDD & 1 x mSATA SSD	1 x 2.5” SATA HDD bay	1 x 2.5” SATA HDD bay	1 x 2.5” SATA HDD bay	
	CF	CF Type II			CF Type II	--	CF Type II	
	CD-ROM	--	--	--		--	--	--
Wireless Connection	Wi-Fi	IEEE 802.11 b/g (internal Mini PCI)	IEEE 802.11b/g/n (internal PCIe Mini card)	IEEE 802.11b/g/n (internal PCIe Mini card)	IEEE 802.11b/g/n (internal Mini PCI)	IEEE 802.11b/g/n (internal PCIe Mini card)		
Audio/Video Device	Camera Module	--			--	--	2-megapixel	
	Microphone	--			--	--	Yes	
Physical	Dimensions (WxHxD) (mm)	304 x 246 x 56	304 x 246 x 50	304 x 246 x 50	394 x 309 x 61	394 x 309 x 66	400 x 273 x 63	400 x 273 x 63
	Net Gross Weight	1.8 Kg			3.2 Kg	5.8 Kg	3.3 Kg	3.3 Kg
System Cooling		Fanless			Fanless	Active with fan	Fanless	Active with fan
Environment	Operation Temperature	0°C~50°C	0°C~40°C with SATA HDD -10°C~50°C with CF card or SATA SSD	-10°C~50°C	0°C~40°C with SATA HDD -10°C~45°C with CF card or SATA SSD	0°C~50°C	0°C~40°C with SATA HDD -10°C~50°C with CF card or SATA SSD	
	Storage Temperature	-20°C~60°C			-20°C~60°C	-20°C~60°C	-20°C~60°C	
Power Requirement		12 VDC		9-28 VDC	12 VDC			

AFOLUX 17”~19” Selection Guide

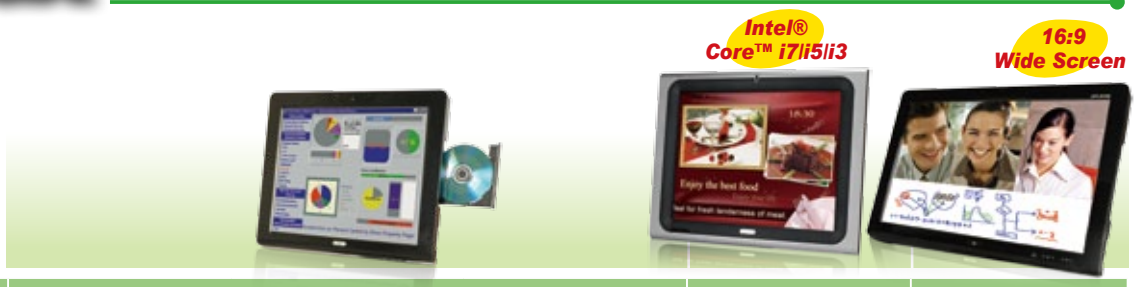

LCD Size		17”			19"	Wide 19"
Model		AFL-17D-N270	AFL-17D-GM45	AFL-17i-HM55	AFL-19i-HM55	AFL-W19A-N270
Display	LCD Size	17"			19"	
	Max Resolution (WxH)	1280 x 1024				1440 x 900
	Brightness (cd/m²)	300		380	350	300
	Contrast Ratio	800:1			1000:1	1000:1
	LCD Color	16.7M				16.2M
	Pixel Pitch (mm) (HxV)	0.264(H) x 0.264(V)			0.294 (H) x 0.294 (V)	0.285 (H) x 0.285 (V)
	Viewing Angle (H/V)	160º/160º			170º/160º	170º/160º
	Backlight MTBF (hrs)	50000			50000 (LED backlighting)	
Motherboard	CPU	Intel® Atom™ Processor N270 1.6GHz CPU	Intel® Celeron® M 575 2.0GHz	Intel® Celeron® M P4500 CPU"	Intel® Celeron® M P4500 CPU	Intel® Atom™ Processor N270 1.6GHz CPU
			Intel® Core™2 Duo P8400 2.26GHz CPU	Intel® Core™ i7/i5/i3	Intel® Core™ i7/i5/i3	
			Intel® Core™2 Duo T9400 2.53GHz CPU			
	Chipset	Intel® 945GSE + ICH7M	Intel® GM45 + ICH9M	Intel® HM55	Intel® HM55	Intel® 945GSE + ICH7M
	RAM	One 200-pin DDR2 SO-DIMM (max. 2GB)	Two 200-pin DDR2 SO-DIMM (max. 4GB)	Two 204-pin DDR3 SO-DIMM (max. 8GB)	Two 204-pin DDR3 SO-DIMM (max. 8GB)	One 200-pin DDR2 SO-DIMM (max. 2GB)
I/O Ports and Switches		1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x VGA (DB-15)	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 6 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x VGA (DB-15) 1 x HDMI Port	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x VGA (DB-15) 1 x HDMI Port	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x VGA (DB-15) 1 x HDMI Port	1 x RS-232 COM Port (DB-9) 1 x RS-232/422/485 COM Port (DB-9) 2 x RJ-45 for GbE LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out) 1 x VGA (DB-15)
Drive Bay	HDD	1 x 2.5” SATA HDD bay				
	CF	CF Type II		--	--	CF Type II
	CD-ROM	1 x Slim type ODD bay		--	--	--
Wireless Connection	WiFi	IEEE 802.11b/g/n (internal PCIe Mini card)				
Audio/Video Device	Camera Module	300K pixels		--	--	300K pixels
	Microphone	Yes		--	--	Yes
Physical	Dimensions (WxHxD) (mm)	410 x 349 x 83		428 x 350 x 71	470 x 383 x 72	475 x 259 x 65
	Net Gross Weight	6.2 Kg		6.0 Kg	6.2 Kg	5.8 Kg
System Cooling		Fanless	Active with fan	Active with fan	Active with fan	Fanless
Environment	Operation Temperature	0°C~40°C with SATA HDD -10°C~50°C with CF card or SATA SSD		0°C~50°C	0°C~50°C	0°C~40°C with SATA HDD -10°C~50°C with CF card or SATA SSD
	Storage Temperature	-20°C~60°C				
Power Requirement		12 VDC				

5.7" VGA AFOLUX PPC

AFL-057A-LX

AMD Geode™ LX 800 500MHz Processor

AFL-057A-Z510/Z530

5.7” Power over Ethernet (PoE) All-in-One Panel PC

IPS-2042TX
Industrial Lite-managed PoE Switch

Features

- 5.7” PoE compliant Panel PC with resistive touchscreen
- IEEE802.3af Power Over Ethernet (PoE) compliant
- Intel® Atom™ processor Z510P/Z530P up to 1.6 GHz
- Lower power consumption and fanless operation
- One CompactFlash® slot
- Wide operating temperature capability: -20ºC to 60ºC (AFL-057A-ZXX)
- IEI One Key Recovery solution for rapid OS backup and recovery (over 4 GB storage capacity recommended)
- IP 64 compliant front panel

Specifications

Model	AFL-057A-LX	AFL-057A-Z510/Z530
LCD Size	5.7”	
Max Resolution	640 (W) x 480 (H)	
Brightness (cd/m²)	400	
Contrast Ratio	300:1	
LCD Color	262K	
Pixel Pitch (mm)	0.06 (W) x 0.18 (H)	
Viewing Angle (H-V)	140º / 100º	
Backlight MTBF	50,000 hrs (LED Backlight)	
SBC Model	AFLMB-LX2-800	AFLMB-US15W
CPU	AMD Geode™ LX 800 (500Mhz)	Intel® Atom™ Processor Z530P 1.6 GHz Intel® Atom™ Processor Z510P 1.1 GHz
Chipset	AMD LX800 + AMD CS5536	Intel® SCH: US15W
RAM	Supports one 333MHz or 400MHz DDR SO-DIMM (Max.1GB)	Supports one 533MHz or 400MHz DDR SO-DIMM (Max.2GB)
I/O Ports	1 x RJ-45 for RS-232 COM port 1 x RJ-45 for RS-232/422/485 COM port 2 x USB 2.0 1 x RJ-45 for 10/100Mbps LAN 1 x VGA port 1 x Power switch 1 x Reset button 1 x Power jack	1 x RS-232/422/485 COM port 1 x RJ-45 for GbE supports IEEE 802.3af, PoE/PD 1 x USB 2.0 1 x Reset button 1 x 5V DC power input
SSD	CF Type II	
PoE Function	--	Require IEEE 802.3af 12.95W power input Power Device PD (Power-input)
Watchdog Timer	Software programmable supports 1~255 sec. system reset	
Audio	AMP 1.5W + 1.5W (internal speaker)	
Wireless Connection	1 x Wireless LAN 802.11 b/g Module (internal USB interface)	--
Construction Front Panel	ABS + PC Plastic front frame /Aluminum die-casting body	
LED Function	1 x LED on front panel for power on/off	
Mounting	Panel, Wall, Rack, Stand or Arm mounting VESA 75mm x 75mm	Panel, Wall, Stand and Arm VESA 75mm x 75mm
Front Panel Color	Gray 7539U	
Dimension (WxHxD) (mm)	180 x 135 x 55	
Operation Temperature (°C)	0°C~50°C	-20°C~60°C
Storage Temperayure (°C)	-20°C ~ 60°C	
N/G Weight	0.8 Kg	
IP Level	IP 64 compliant front panel	
Safety & EMC	CE / FCC	
Touch Screen	4-Wire Resistive Type (touch controller IC is on board)	
Power Adapter	P/N: 63000-FSP036RAB608-RS 36W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC	P/N: 63000-FSP025DGAA1705-RS (optional) 25W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 5VDC
Power Requirement	12VDC	5V DC-IN Power input or receives PoE Power from RJ45 Connector
Power Consumption	15W	12W

PoE Panel PC Eliminates Need for AC Outlets

The IEI AFL-057A is IEEE 802.3af compliant. The IEEE 802.3af PoE standard ensures that 12.95W of DC power is provided to each connected device. PoE Technology describes a system that safely transfers electrical power, along with data, to remote devices over a standard category 5e cable in an Ethernet network.

AFL-057A Dimensions (Unit: mm)

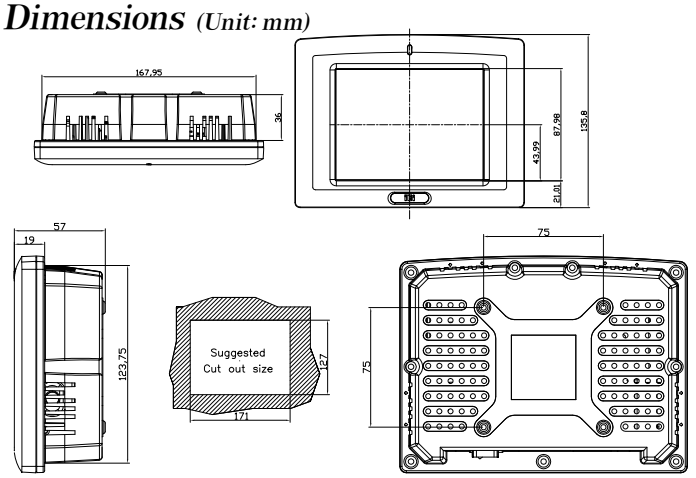

AFL-057A-LX

Aluminum die-casting rear cover with good heat dissipation!

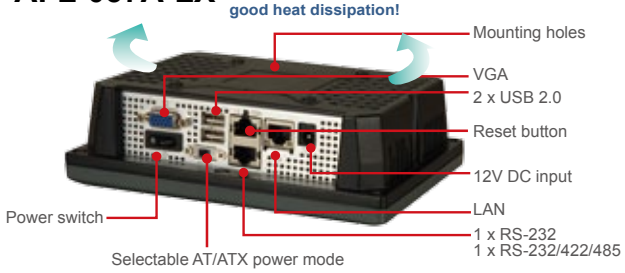

AFL-057A-Zxxx

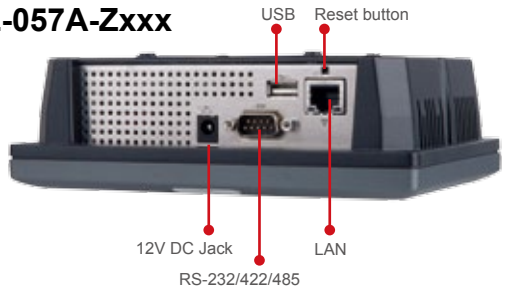

Ordering Information

Part Number	Description
AFL-057A-LX/R/256M-R21	5.7" VGA fanless panel PC with AMD LX-800 CPU, AT/ATX mode, wireless module, touch screen and 256MB DDR RAM, R21
AFL-057A-LX/R/512M-R21	5.7" VGA fanless panel PC with AMD LX-800 CPU, AT/ATX mode, wireless module, touch screen and 512MB DDR RAM, R21
AFL-057A-Z530/ R/1G-R11	5.7" 400 cd/m² VGA fanless panel PC with Intel® Atom™ Z530 1.6 GHz, PoE IEEE 802.3 af, touch screen,1 GB DDR2 553 MHz
AFL-057A-Z510/ R/1G-R11	5.7" 400 cd/m² VGA fanless panel PC with Intel® Atom™ Z510 1.1 GHz, PoE IEEE 802.3 af, touch screen ,1GB DDR2 553 MHz

Options

Item		AFL-057A-LX	AFL-057A-Zxxx
IQ Mount	Panel Mount Kit	AFLPK-12	
	Wall Mount Kit	AFLWK-12	
	Rack Mount Kit	AFLRK-057	
	ARM	ARM-11-RS / ARM-31-RS	
	Stand	STAND-C12-R10 / STAND-100-RS	
	VSTAND	VSTAND-A07-R11	
OS	Win XPE (1GB CF card)	AFLCF-057-LX-XPE-R10	AFLCF-057-US15W-XPE-R10
	Win 7 Embedded (2GB CF card)	N/A	AFLCF-057-US15W-WES7E-R10
	Win CE 5.0 (128MB CF card)	AFLCF-057-LX-CE5-R10	N/A
	Win CE 6.0 (128MB CF card)	AFLCF-057-LX-CE6-R10	AFLCF-057-US15W-CE6-R10
	Linux (2GB CF card)	AFLCF-057-US15W-LNX-R10	N/A
Industrial PoE Switch (4 ports P.S.E)		N/A	IPS-2042TX
Card Reader	Hybrid Card Reader	AFLP-08AMSI-U	AFLP-08AMSI-U
	Magnetic Stripe Reader	AFLP-08AMSR-U	AFLP-08AMSR-U
Power Adapter	DC to DC converter module	IDD-930160-KIT	N/A
	DC 12V Input UPS	AUPS-A10-R1- (7.4V 3800mAh)	N/A
	DC 9~36V Input UPS	AUPS-A10-R1- (7.4V 3800mAh)	N/A
	25W Pwer Adpater for AFL-057A-Zxxx	N/A	63000-FSP025DGAA1705-RS
Bluetooth	Bluetooth V2.0+EDR	AFL-BT-KIT03-R10	N/A

IPS-2042TX

Industrial 6-port Lite-Managed PoE Ethernet Switch

- World's fastest Redundant Ethernet Ring : O-Ring (Recovery time < 10 ms over 250 units of connection)
- Multiple Redundant Ethernet technology RSTP/STP, O-Ring supported
- SNMP v1 supports secured network management
- Web-based configuration and Windows utility (Open-Vision)
- Triple redundant DC power inputs via terminal block and power jack
- Event notification through Syslog, Email, and SNMP trap
- Two 100Base-FX fiber ports support long distance connections
- 4 ports support P.S.E based on IEEE 802.3af standard up to 25 watts per port
- Wide operating temperature range from -40°C to 70°C

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3;5mm
Power Adpater	63000-FSP036RAB608-RS	1	90~264V AC; 12V DC; 36W (for AFL-057A-LX)
Power Cord	32000-000002-RS	1	1750mm (EU or US, depending on the shipment country) (for AFL-057A-LX)
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

7" Wide Screen WVGA AFOLUX PPC

AFL-07A-LX
AMD Geode™ LX 800 500 MHz Processor

AFL-07A-N270
Intel® Atom™ N270 1.6GHz Processor

AFL-W07A-N26
Intel® Atom™ N2600 1.6GHz Processor New

9V ~ 28V Wide DC Power Input

The compact fanless AFL-W07A-N26 model with widescreen high-brightness panel is ideal for setup in a place where space and light is limited. This makes it an ideal choice for mobile and transportation PC applications.

16:9 Wide Screen

Features

- 7” widescreen WVGA LED backlight TFT LCD with resistive touch screen
- 9V~28V wide range DC power input (for Intel® N2600 platform)
- Compact design with plastic housing
- Fanless cooling system
- Selectable AT/ATX power mode
- System memory up to 2 GB SDRAM
- Built-in 802.11b/g/n Wireless LAN
- Built-in speakers
- One compactFlash® slot
- IP 64 compliant front panel
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (suggest with over 4GB storage capacity)

Specifications

Model	AFL-07A-LX	AFL-07A-N270	AFL-W07A-N26
LCD Size	7”		
Max Resolution	800 x 480		
Brightness (cd/m²)	500		
Contrast Ratio	400:1		
LCD Color	262K		
Pixel Pitch (mm)	0.0635 (H) x 0.1905 (V)		
Viewing Angle (H-V)	140° / 110°		
Backlight MTBF	50000 hrs (LED Backlight)		
SBC Model	AFLMB-LX-800	AFLMB-945GSE-N270-R10	AFLMB-CV-N2600-R10
CPU	AMD Geode™ LX 800 (500Mhz)	Intel® Atom™ processor N270 1.6GHz CPU	Intel® Atom™ N2600 dual core 1.6 GHz CPU
Chipset	AMD LX800 + AMD CS5536	Intel® 945GSE + ICH7M	Intel® NM10
RAM	Supports one 333MHz or 400MHz DDR SO-DIMM (1GB Max.)	Supports one 400MHz or 533MHz DDR2 SO-DIMM (2GB Max.)	One 800 MHz 204-pin DDR3 SO-DIMM slot (max. 2G) pre-installed wiith 2GB
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for 10/100Mbps LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Jack (Line-out)	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for GbE 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x External SATA 1 x Audio Jack (Line-out)	1 x 9-28V Lockable DC Jack 1 x RJ45 for RS-232 1 x RS-232/422/485 1 x VGA 2 x GbE LAN 2 x USB 2.0 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Line out
Storage	CF Type II		mSATA
Watchdog Timer	Software programmable supports 1~255 sec. system reset		
Audio	AMP 1.5W + 1.5W (internal speaker)		AMP 2W + 2W (internal speaker)
Wireless Connection	1 x Wireless LAN 802.11 b/g Module (internal Mini PCI interface)	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)	1 x Wireless LAN 802.11b/g/n 2T2R Module (internal PCIe Mini card interface)
Construction Front Panel	ABS + PC Plastic front frame		
LED Function	1 x LED on front panel for power on/off		
Mounting	Panel, Wall, Rack, Stand or Arm mounting VESA 75mm x 75mm		
Front Panel Color	Gray 7539U		
Dimensions (WxHxD) (mm)	226 x 140 x 41		
Operation Temperature (°C)	0~50°C	-10°C ~50°C	-10°C~50°C
Storage Temperayure (°C)	-20°C ~ 60°C		
N/G Weight	0.6 Kg		
IP Level	Front Frame IP64		
Safety & EMC	CE / FCC		
Touch Screen	4-wire Resistive Type (touch controller IC is on board)		
Power Adapter	P/N: 63000-FSP036RAB608-RS 36W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC		P/N: 63000-FSP036RAB610-RS 36W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12VDC	12VDC	9-28V DC
Power Consumption	20W	23W	23W

Fully Integrated I/O

AFL-07A-LX

- Standard VESA mounting
- 2 x USB
- 2 x LAN
- 1 x RS-232
  1 x RS-232/422/485 selectable COM port
- 12VDC Power Jack or 18~30VDC Input
- Power Switch

AFL-07A-N270

- Standard VESA mounting
- 2 x USB
- 2 x LAN
- 1 x RS-232
  1 x RS-232/422/485 selectable COM port
- Power Switch
- 12VDC Power Jack
- Audio (Line-out)

AFL-W07A-N26

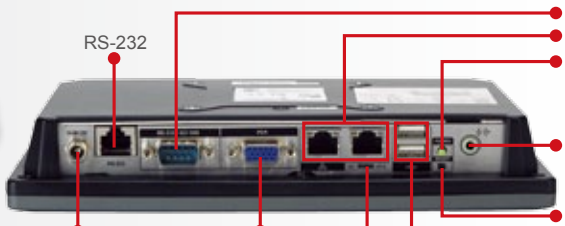

- RS-232/422/485
- 2 x LAN Port
- Power Switch
- RS-232
- Line Out
- Reset Button
- 2 x USB 2.0
- AT/ATX Switch
- Lockable DC Jack
- VGA

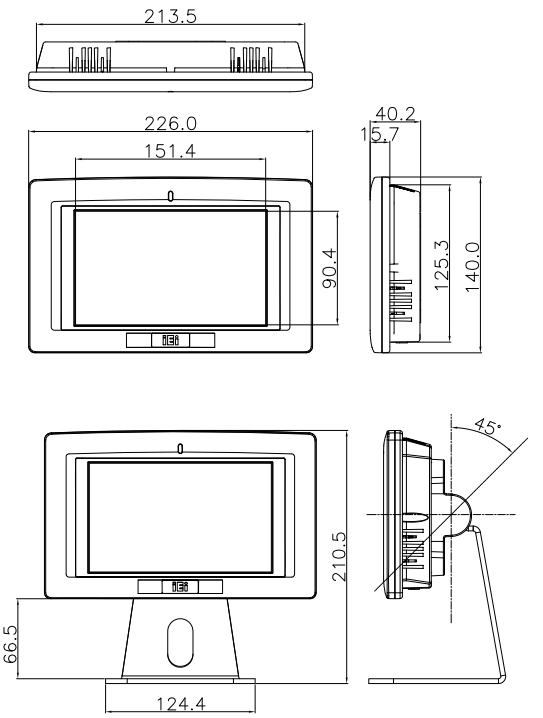

AFL-07A/AFL-W07A Dimensions (Unit: mm)

(Optional Stand Kit)

Ordering Information

Part Number	Description
AFL-07A-LX/R/256-R22	7" 500 cd/m², WVGA fanless panel PC with AMD LX-800 CPU, AT/ATX mode, 802.11b/g Wireless Module, Touch screen and 256MB DDR RAM, R22
AFL-07A-LX/R/512-R22	7" 500 cd/m², WVGA fanless panel PC with AMD LX-800 CPU, AT/ATX mode, 802.11b/g Wireless Module, Touch screen and 512MB DDR RAM, R22
AFL-07A-N270/R/1G-R23	7" 500 cd/m² WVGA fanless panel PC with Intel® Atom™ N270 1.6GHz, 802.11b/g/n wireless module, touch screen ,1GB DDR2 533, R23
AFL-W07A-N26/R/2G-R10	7" 500cd/m², WVGA fanless panel PC with Intel® Atom™ cedarview N2600 dual core 1.6GHz, 802.11b/g/n wireless module, touch screen, 2GB DDR3, R10

Options

Model	AFL-07A-LX	AFL-07A-N270	AFL-W07A-N26
Panel Mounting Kit	AFLPK-12		
Wall Mounting Kit	AFLWK-12		
Rack Mounting Kit	AFLRK-07		
Arm	ARM-11-RS / ARM-31-RS		
Stand	STAND-100-RS		
VSTAND	VSTAND-A07-R11		
9~30VDC to 12VDC Converter Module	IDD-930160-KIT		
OS: Win CE 5.0 (128 MB CF card)	AFLCF-07-LX-CE-R21	--	--
OS: Win CE 6.0 (128 MB CF card)	AFLCF-07-LX-CE060-R21	AFLCF-07-N270-CE060-R23	--
OS: Win XPE (1 GB CF card)	AFLCF-07-LX-XPE-R21	AFLCF-07-N270-XPE-R23	AFL-W07-N26-XPE-R10*
OS: LINUX (2 GB CF card)	AFLCF-07-LX-LNX-R21	AFLCF-07-N270-LNX-R23	AFL-W07-N26-LNX-R10*
OS: Win 7 Embedded (4 GB CF card or CD-ROM)	--	AFLCF-07-N270-WES7E-R23	AFL-W07-N26-WES7E-R10*
Hybrid Card Reader	AFLP-08AMSI-U		
Magnetic Stripe Reader	AFLP-08AMSR-U		
DC 12V Input UPS	AUPS-A10-R10 (7.4V 3800mAH)		
DC 9~36V Input UPS	AUPS-A20-R10 (7.4V 3800mAH)		
Bluetooth V2.0+EDR	AFL-BT-KIT02-R10		

*OS image with CD-ROM

ISMM Support Functions

	Voltage	Fan	Smart Fan	Temperature	WDT	Cash Drawer
AFL-07A-LX	V			V	V	
AFL-07A-N270	V			V	V	
AFL-W07A-N26	V			V	V	

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3;5mm
Power Adpater	63000-FSP036RAB608-RS 63000-FSP036RAB610-RS (for AFL-07A-N26)	1	90~264V AC; 12V DC; 36W
Power Cord	32000-000002-RS	1	1750mm; European Standard (EU or US, depending on the shipment country)
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

8.4" SVGA AFOLUX Panel PC

AFL-08AH-LX

AMD Geode™ LX 800 500 MHz Processor

AFL-08AH-N270

Intel® Atom™ N270 1.6GHz Processor

AFL-08A-N26

Intel® Atom™ N2600 1.60 GHz Processor New

Features

- 8.4" TFT LED Backlight LCD with resistive touch screen
- 9V~28V wide range DC power input (for Intel® N2600 platform)
- Fanless cooling system
- Selectable AT/ATX power mode
- System memory up to 2GB SDRAM
- Built-in 802.11b/g/n Wireless LAN
- Built-in speakers
- One CompactFlash® slot
- IP 64 compliant front panel
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (Suggest over 4GB storage capacity)

Specifications

Model	AFL-08AH-LX	AFL-08AH-N270	AFL-08A-N26
LCD Size	8.4"		
Max Resolution	800 x 600		
Brightness (cd/m²)	450		
Contrast Ratio	600:1		
LCD Color	262K		
Pixel Pitch (mm)	0.213 (H) x 0.213 (V)		
Viewing Angle (H-V)	160° / 140°		
Backlight MTBF	50000 hrs (LED Backlight)		
SBC Model	AFLMB-LX-800	AFLMB-945GSE-N270-R10	
CPU	AMD Geode™ LX 800 (500MHz)	Intel® Atom™ process N270 1.6GHz CPU	Intel® Atom™ N2600 dual core 1.6 GHz CPU
Chipset	AMD LX 800 + AMD CS5536	Intel® 945GSE + ICH7M	Intel® NM10
RAM	Supports one 400MHz or 533MHz DDR SO-DIMM (Max.1GB)	Supports one 400MHz or 533MHz DDR2 SO-DIMM (Max. 2GB)	One 800 MHz 204-pin DDR3 SO-DIMM slot (Max. 2GB) pre-installed wiith 2GB
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for 10/100Mbps LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for GbE 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x External SATA 1 x Audio Port 1 x Power Jack	1 x 9-28V lockable DC Jack 1 x RJ-45 for RS-232 1 x RS-232/422/485 1 x VGA 2 x GbE LAN 2 x USB 2.0 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Line out
Storage	CF Type II		mSATA
Watchdog Timer	Software programmable supports 1~255 sec. system reset		
Audio	AMP 1.5W + 1.5W (internal speaker)		AMP 2W + 2W (internal speaker)
Wireless Connection	1 x Wireless LAN 802.11 b/g Module (internal Mini PCI interface)	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)	1 x Wireless LAN 802.11b/g/n 2T2R Module (internal PCIe Mini card interface)
Construction Front Panel	ABS + PC Plastic front frame		
LED Function	1 x Power on/off LED on front panel		
Mounting	Panel, Wall, Rack, Stand and Arm VESA 75mm x 75mm		
Front Panel Color	Gray 7539U		
Dimensions (WxHxD) (mm)	234 x 184 x 42		
Operation Temperature (°C)	0°C ~ 50°C	-10°C ~50°C	-10°C ~50°C
Storage Temperayure (°C)	-20°C ~ 60°C		
N/G Weight	0.8 Kg		
IP Level	IP 64 compliant front panel		
Safety & EMC	CE / FCC		
Touch Screen	4-Wire Resistive Type (touch controller IC is on board)		
Power Adapter	P/N: 63000-FSP036RAB608-RS 36W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC		P/N: 63000-FSP036RAB610-RS 36W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12VDC	12VDC	9-28V DC
Power Consumption	20W	29W	29W

Fully Integrated I/O

AFL-08AH-LX

AFL-08AH-N270

AFL-08A-N26

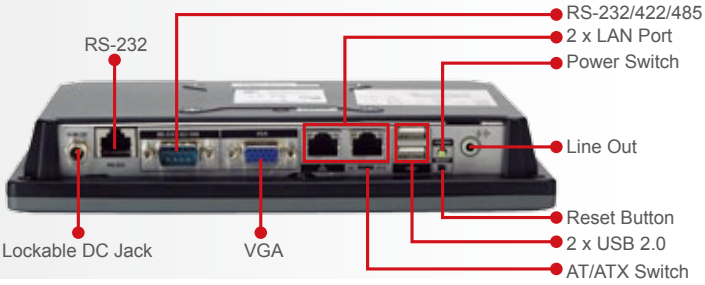

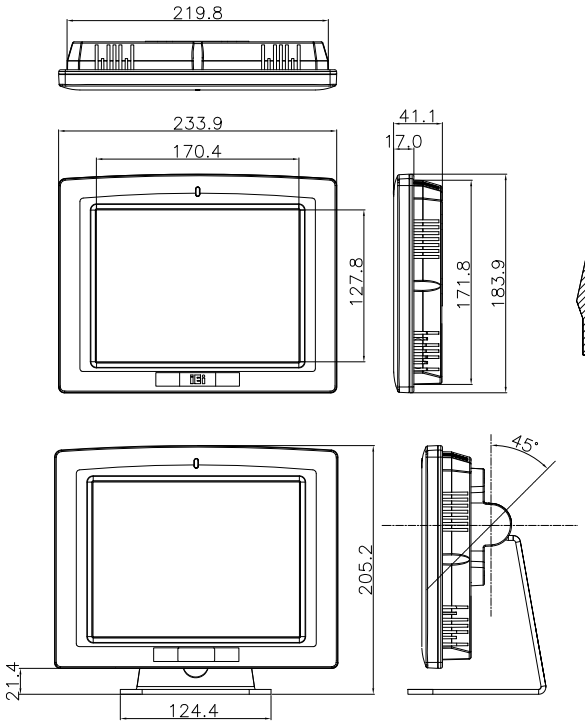

AFL-08AH/AFL-08A Dimensions (Unit: mm)

Ordering Information

Part Number	Description
AFL-08AH-LX/R/256-R22	8.4" 450 cd/m², SVGA fanless panel PC with AMD LX-800 CPU, AT/ATX mode, 802.11b/g Wireless Module, Touch screen and 256MB DDR RAM, R22
AFL-08AH-LX/R/512-R22	8.4" 450 cd/m², SVGA fanless panel PC with AMD LX-800 CPU, AT/ATX mode, 802.11b/g Wireless Module, Touch screen and 512MB DDR RAM, R22
AFL-08AH-N270/R/1G-R23	8.4" 450 cd/m², SVGA fanless panel PC with Intel® Atom™ N270 1.6GHz,802.11b/g/n wireless module, touch screen , 1GB DDR2 533MHz, R23
AFL-08A-N26/R/2G-R10	8.4" 450cd/m², SVGA fanless panel PC with Intel® Atom™ N2600 dual core 1.6GHz, 802.11b/g/n wireless module, touch screen, 2GB DDR3, R10

Options

Model	AFL-08AH-LX	AFL-08AH-N270	AFL-08A-N26
Panel Mounting Kit	AFLPK-12		
Wall Mounting Kit	AFLWK-12		
Rack Mounting Kit	AFLRK-08		
Arm	ARM-11-RS / ARM-31-RS		
Stand	STAND-100-RS		
VSTAND	VSTAND-A10-R11		
9~30VDC to 12VDC Converter Module	IDD-930160-KIT		
OS: Win CE 5.0 (128 MB CF card)	AFLCF-08-LX-CE-R21	--	
OS: Win CE 6.0 (128 MB CF card)	AFLCF-08-LX-CE060-R21	AFLCF-07-N270-CE060-R23	--
OS: Win XPE (1 GB CF card)	AFLCF-08-LX-XPE-R21	AFLCF-07-N270-XPE-R23	AFL-W07-N26-XPE-R10*
OS: LINUX (2 GB CF card)	AFLCF-08-LX-LNX-R21	AFLCF-07-N270-LNX-R23	AFL-W07-N26-LNX-R10*
OS: Win 7 Embedded (4 GB CF card or CD-ROM)	--	AFLCF-07-N270-WES7E-R23	AFL-W07-N26-WES7E-R10*
Hybrid Card Reader	AFLP-08AMSI-U		
Magnetic Stripe Reader	AFLP-08AMSR-U		
DC 12V Input UPS	AUPS-A10-R10 (7.4V 3800mAH)		
DC 9~36V Input UPS	AUPS-A20-R10 (7.4V 3800mAH)		
Bluetooth V2.0+EDR	AFL-BT-KIT02-R10	AFL-BT-KIT01-R10	AFL-BT-KIT02-R10

*OS image with CD-ROM

ISMM Supported Functions

	Voltage	Fan	Smart Fan	Temperature	DIO	WDT	Cash Drawer
AFL-08AH-LX	V			V		V	
AFL-08AH-N270	V			V		V	
AFL-08AH-N26	V			V		V	

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3;5mm
Power Adpater	63000-FSP036RAB608-RS 63000-FSP036RAB610-RS (for AFL-08A-N26)	1	90~264V AC; 12V DC; 36W
Power Cord	32000-000002-RS	1	1750mm; European Standard (EU or US, depending on the shipment country)
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

AFL-F08A 8” Flat-bezel Panel PC

The new 8” panel is a full-flat surface touchscreen PC. The AFL-F08A includes all necessary input/output interfaces to control any subsystem or automation hardware in your office, business, or home. The new stylish design is easily integrated into any environment. The front panel is IP 64 compliant. An optional projected capacitive touchscreen provides a multi-touch interactive user experience.

Features:

- 8.0” LED TFT LCD with stylish flat-bezel touchscreen
- Optional projected capacitive touchscreen supports multi-touch
- Fanless system with Intel® Atom™ N270 processor (512K Cache, 1.60 GHz, 533 MHz FSB)
- Hot keys controlled by cap-sensor in the front panel
- Optional color change kit matches the style of any decoration
- Wireless LAN 802.11b/g/n
- Built-in 2-megapixel CMOS camera with low-light capability
- Two 1.5W speakers and micophone for multimedia applications
- IP 64 compliant front panel
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (suggest with over 4GB storage capacity)

Multi-touch | Wi Fi Wi-Fi | Windows 7 | intel Intelligent Systems Alliance | F3 One Key Recovery iEi symantec

Full-flat Surface Touchscreen

The AFL-F08A flat-bezel design covers the entire front frame (bezel) of standard LCD to make the screen and bezel appear to blend together. The seamless flat-bezel touchscreen system offers a stylish and easy to clean surface.

Flat-bezel Advantages:

- **Better visual effects**
- **No edge effect**
- **Sleek and stylish**
- **Easy to clean**

Applications:

OFFICE



LIVING ROOM

YACHTING

KITCHEN

AUTOMATION

MUSEUM

5-wire Resistive Touch Sensor

• Operational Theory

There are two major parts of resistive touch panel: ITO film and ITO glass. Two conductive layers are separated and isolated by the dot spacers scattered evenly on the ITO glass. Only when the proper activation force is applied onto the ITO film, these two conductive layers are contacted and the analog signal (the voltage) will be sent out to the touch panel controller then transferred into a digital signal for system processing.

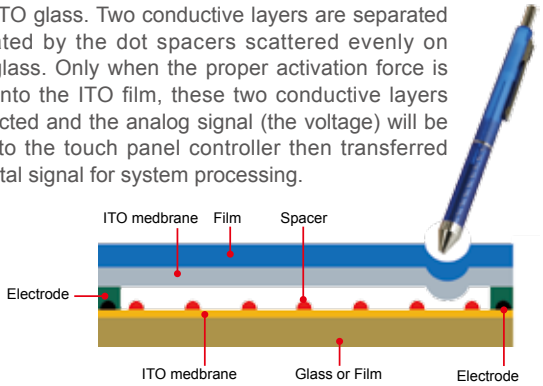

Touch Window Architecture

The AFL-F08A utilizes touch window technology which consists of a decorative film overlay mounted in front of the touch panel to achieve the true-flat surface of a flat-bezel touch system.

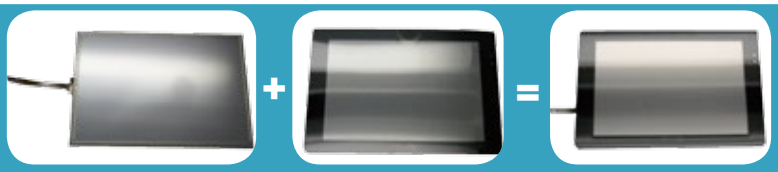

Projected Capacitive Touch Sensor

• Operational Theory

Projected capacitive touch is based on principle of embedding an array of micro-fine sensing wires within a multi-layer laminated screen behind a protective front surface, ensuring that the sensing medium is well-protected from accidental damage.

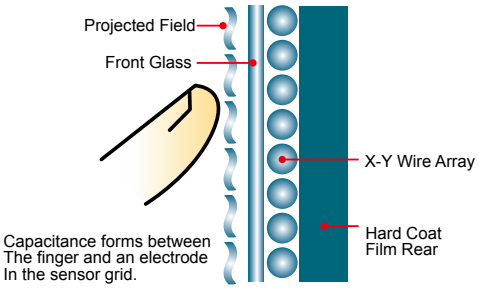
Projected Field
Front Glass
X-Y Wire Array
Hard Coat Film Rear
Capacitance forms between The finger and an electrode In the sensor grid.

• Windows® 7 with Multi-touch Capability

The AFL-F08A comes with the true multi-touch Microsoft Windows 7 operating system. Windows 7 features improved touch and gesture support. With Windows 7, handwriting recognition is faster, more accurate and with more language support.

• 7H Anti-scratch Surface (Projected capacitive type touch screen)

Projected Capacitive touch technology utilizes a durable glass front surface. 7H hardness is stronger than the conventional touch panel and therefore is able to protect the screen from damage.

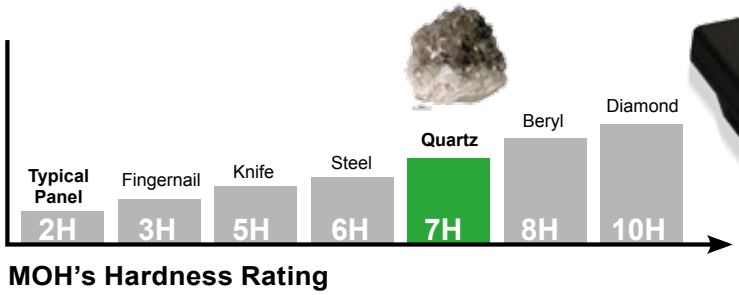

Picture Frame In-Wall Mount

This optional kit includes a decorative front plate and wall mount enclosure to securely house the AFL-F08A panel PC. The enclosure includes knockouts for power and I/O interface cables.

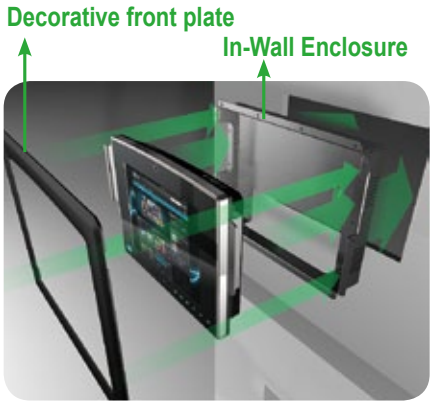

• Optional Decorative Kit:

DIM.
300mm x 230mm x 3.7mm

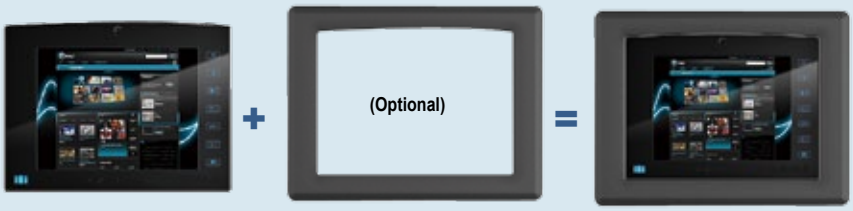

Restaurant Interactive Multi-touch Table

Applications

The AFL-F08A interactive system can be mounted in tables from which your customers can order, track and pay for their meal. The terminals can also be used to play digital games while waiting for the food to be served.

Casino Customer Relationship Management

Applications

The user friendly all-in-one system helps casino managers and dealers to identify players and to calculate and record winnings. It is easy to connect to peripherals such as card readers and ticket reader/printers. Convenient and reliable communication with system management servers can be achieved through LAN or wireless LAN connection.

Hot Keys Controlled by Cap-Sensor

Versatile I/O Ports

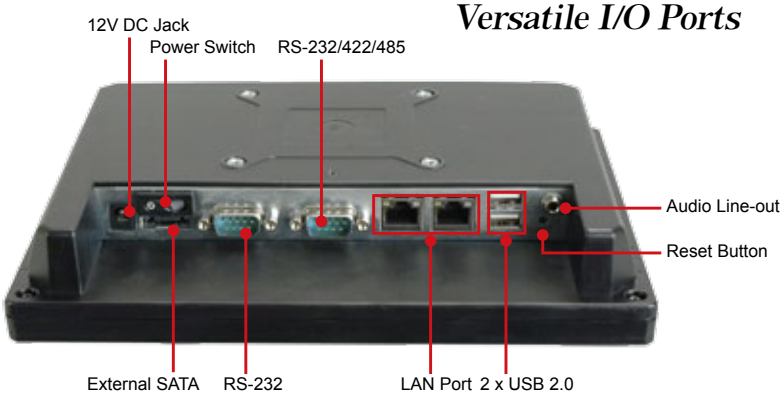

AFL-F08A Dimensions (Unit: mm)

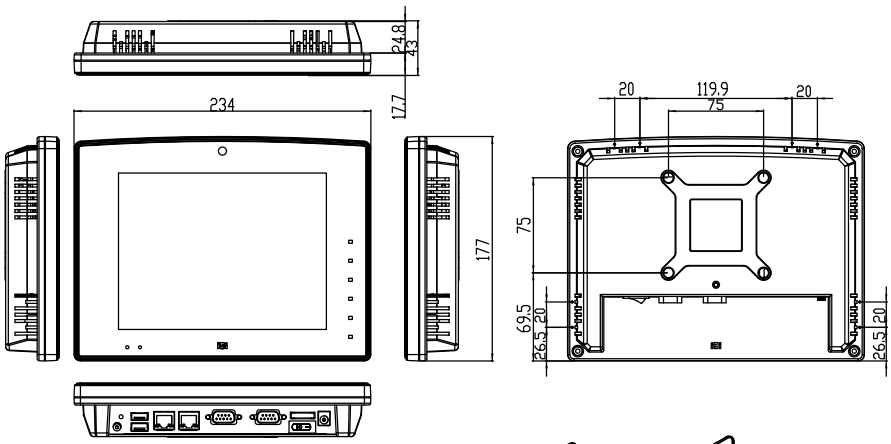

Decoration Kit Dimensions (Unit: mm)

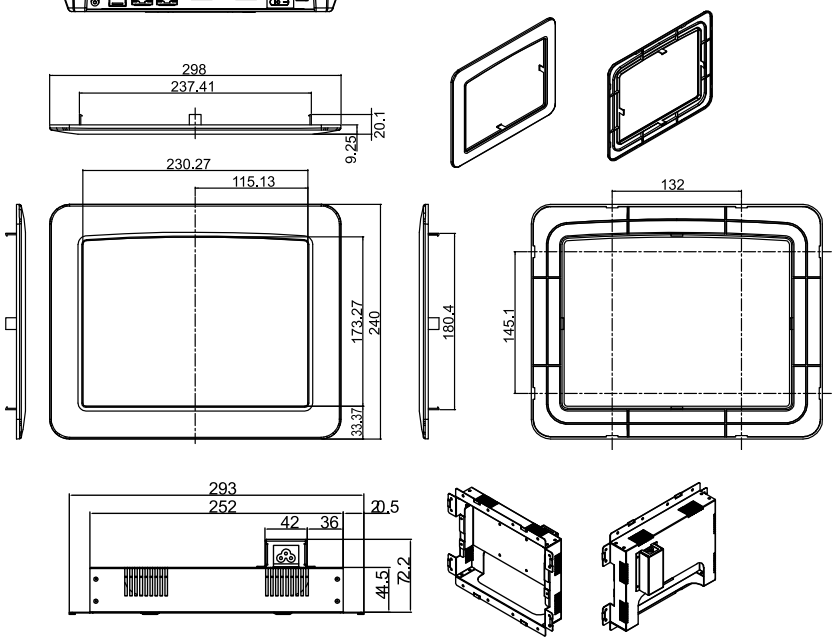

In-Wall Cage Dimensions (Unit: mm)

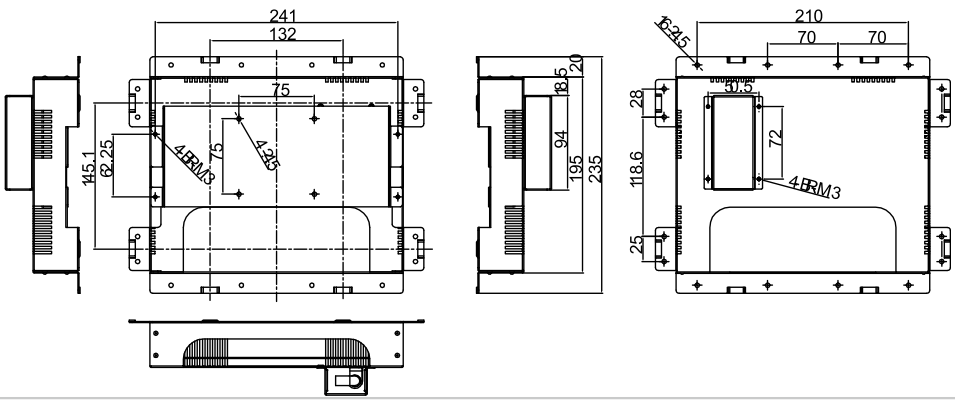

Specifications

Model	AFL-F08A-N270
LCD Size	8"
Max Resolution	800 x 600
Brightness (cd/m²)	250
Contrast Ratio	500:1
LCD Color	262K
Pixel Pitch (mm)	0.2025 (H) x 0.2025 (V)
Viewing Angle (H-V)	140° / 130°
Backlight MTBF	30000 hrs (LED Backlight)
SBC Model	AFLMB-945GSE-N270-R10
CPU	Intel® Atom™ Processor N270 (512K Cache, 1.60 GHz, 533 MHz FSB)
Chipset	Intel® 945GSE + ICH7M
RAM	Supports one 400MHz or 533MHz DDR2 SO-DIMM (Max. 2GB)
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for GbE 2 x USB 2.0 1 x Reset Button 1 x Audio Port (line-out) 1 x 12V DC Power Jack 1 x External SATA
SSD	CF Type II
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Audio	AMP 1.5W + 1.5W (internal speakers)
Wireless Connection	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini interface)
Camera	2 megapixel with Low Light Function and digital microphone
Front Panel Construction	ABS + PC Plastic front frame
Membrane Keypad	LCD on/off, Brightness up/down, Volume up/down by cap-sensor
Mounting	In-Wall, Panel, Wall, Stand and Arm VESA 75mm x 75mm
Front Panel Color	Black
Dimensions (WxHxD) (mm)	234 x 177 x 43
Operation Temperature (°C)	-10°C ~ 50°C
Storage Temperature (°C)	-20°C ~ 60°C
N/G Weight	1.8Kg
IP Level	IP 64 compliant front panel
Safety & EMC	CE / FCC
Touch Screen	5 (touch controller IC is on board) or projected capacitive type touch screen
Power Adapter	63000-FSP036RAB608-RS 36W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12VDC
Power Consumption	32W

Ordering Information

	Part Number	Description
Resistive Touch Panel	AFL-F08A-N270/R/1G-R24	8.0" 250cd/m² SVGA fanless panel PC with Intel® Atom™ N270 1.6GHz CPU, 1GB DDR2 RAM, 802.11b/g/n Wi-Fi, touch screen, 2 megapixel camera, microphone, R24
Projected Capacitive Multi-Touch Panel	AFL-F08A-N270/PC/1G-R24	8.0" 250cd/m² SVGA fanless panel PC with Intel® Atom™ N270 1.6GHz CPU, 1GB DDR2 RAM, 802.11b/g/n Wi-Fi, projected capacitive multi-touch panel screen, 2 megapixel camera, microphone, R24

Options

Item	AFL-F08A-N270/R (Resistive type touch)	AFL-F08A-N270/PC (PCT type touch)
Panel Mounting Kit	AFLPK-12	
Wall Mounting Kit	AFLWK-12	
Rack Mounting Kit	AFLRK-08	
Arm	ARM-11-RS / ARM-31-RS	
Stand	STAND-100-RS / STAND-C12	
VSTAND	VSTAND-A10-R11	
9~30VDC to 12VDC converter Module	IDD-930160-KIT	
OS: Win CE 6.0 (128 MB CF card)	AFLCF-F08-N270-CE060-R24	
OS: Win XPE (1 GB CF card)	AFLCF-F08-N270-XPE-R24	
OS: LINUX (2 GB CF card)	AFLCF-F08-N270-LNX-R24	
OS: Win 7 Embedded (4 GB CF card)	AFLCF-F08-N270-WES7E-R24	AFLCF-F08-N270-WES7P-R24
Hybrid Card Reader	AFLP-08AMSI-U	
Magnetic Stripe Reader	AFLP-08AMSR-U	
DC 12V Input UPS	AUPS-A10-R10 (7.4V 3800mAH)	
DC 9~36V Input UPS	AUPS-A20-R10 (7.4V 3800mAH)	
In-wall Cage	AFLIWC-F08A-R10	
Bluetooth V2.0+EDR	AFL-BT-KIT02-R10	

Note: Multi-touch function is only supported on Windows 7 on PCT type touch.

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3;5mm
Power Adpater	63000-FSP036RAB608-RS	1	90~264V AC; 12V DC; 36W
Power Cord	32000-000002-RS	1	1750mm; European Standard (EU or US, depending on the shipment country)
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

8" SVGA AFOLUX PPC

AFL-08B-N270

Intel® Atom™ Processor N270 1.60 GHz

LED Backlight

Features

- 8” LED backlight LCD panel with resistive type touch screen
- Built-in 2-megapixel camera with low light capability
- Built-in digital microphone
- Selectable AT/ATX power mode via internal switch
- Fanless cooling system
- System memory up to 2 GB SDRAM
- Built-in 802.11b/g/n Wireless LAN
- Built-in two 1.5 W speakers
- One CompactFlash® slot
- IP 64 compliant front panel
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (Suggest over 4GB storage capacity)

Wireless 802.11b/g/n | Speakers | Microphone | Camera | Fanless | F3 One Key Recovery

Specifications

Model	AFL-08B-N270
LCD Size	8"
Max Resolution	800 x 600
Brightness (cd/m²)	250
Contrast Ratio	400 : 1
LCD Color	262K
Pixel Pitch (mm)	0.2025 (H) x 0.2025 (V)
Viewing Angle (H-V)	140° / 130°
Backlight MTBF	30000 hrs (LED backlight)
SBC Model	AFLMB-945GSE-N270-R10
CPU	Intel® Atom™ Processor N270 (512K L2 Cache, 1.60 GHz, 533 MHz FSB)
Chipset	Intel® 945GSE + ICH7M
RAM	Supports one 400MHz or 533MHz DDR2 SO-DIMM (Max. 2GB)
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for GbE 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x External SATA 1 x Audio Port 1 x Power Jack
Storage	CF Type II
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Audio	AMP 1.5W + 1.5W (internal speakers)
Camera Module	2-megapixel camera with digital microphone
Wireless Connection	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)
Construction Front Panel	ABS + PC Plastic front frame
LED Function	1 x Power on/off LED on front panel
Mounting	Panel, Wall, Rack, Stand and Arm VESA 75mm x 75mm
Front Panel Color	Gray 7539U
Dimensions (WxHxD) (mm)	234 x 177 x 43
Operation Temperature (°C)	-10°C ~50°C
Storage Temperayure (°C)	-20°C ~60°C
N/G Weight	0.8 Kg
IP Level	IP 64 compliant front panel
Safety & EMC	CE / FCC
Touch Screen	5-wire resistive type (touch controller IC is on board)
Power Adapter	P/N: 63000-FSP036RAB608-RS 36W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12VDC
Power Consumption	25W

Fully Integrated I/O

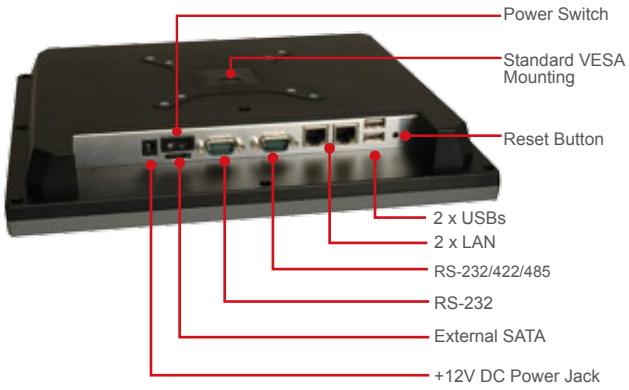

LED-backlight PPC Delivers Vivid Images

The AFL-08B-N270 is the first panel PC with its compact size to incorporate a LED backlight - making viewing and editing photos a lot better than previous CCFL illumination models.

LED backlighting PPC displays clear and vivid pictures!

Enhancement of image quality on LCD screen

- Wider color gamut
- More even screen illumination
- Longer display life
- Low temperature operation and greater power efficiency

Color Gamut Comparison



The LED backlight makes the image color shown on the LCD screen look nature and vivid.

AFL-08B Dimensions (Unit: mm)

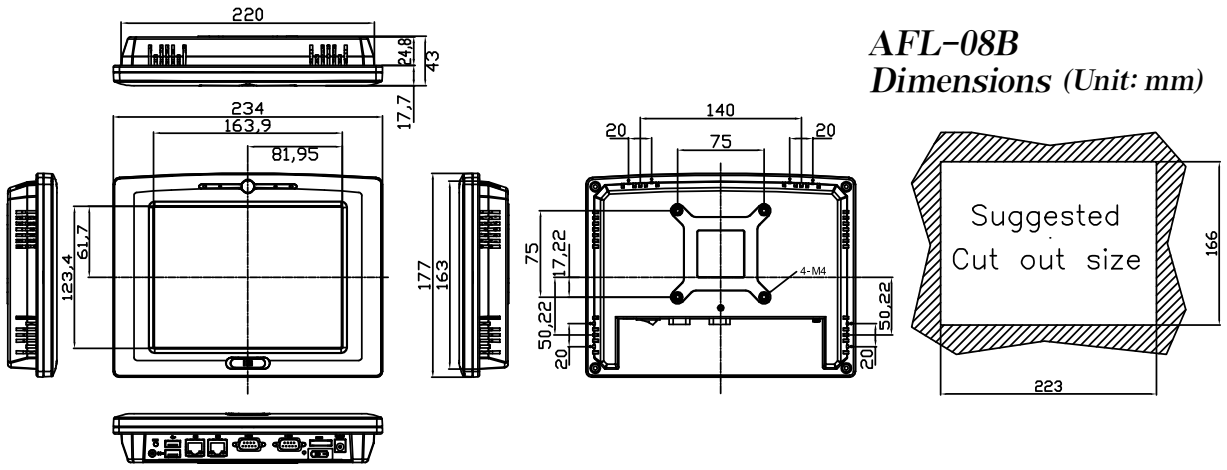

Ordering Information

Part Number	Description
AFL-08B-N270/R/1G-R23	8" 250 cd/m², SVGA fanless panel PC with Intel® Atom™ N270 1.6GHz,802.11b/g/n wireless module, touch screen, 2megapixel camera with digital microphone, 1GB DDR2 533MHz, R23

Options

Item	P/N
Panel Mounting Kit	AFLPK-12
Wall Mounting Kit	AFLWK-12
Rack Mounting Kit	AFLRK-08
Arm	ARM-11-RS / ARM-31-RS
Stand	STAND-100-RS
VSTAND	VSTAND-A10-R11
9~30VDC to 12VDC converter Module	IDD-930160-KIT
OS: Win CE 6.0 (128 MB CF card)	AFLCF-08-N270-CE060-R23
OS: Win XPE (1 GB CF card)	AFLCF-08-N270-XPE-R23
OS: LINUX (2 GB CF card)	AFLCF-08-N270-LNX-R23
OS: Win 7 Embedded (4GB CF card)	AFLCF-08-N270-WES7E-R23
Hybrid Card Reader	AFLP-08BMSI-U
Magnetic Stripe Reader	AFLP-08BMSR-U
DC 12V Input UPS	AUPS-A10-R10 (7.4V 3800mAH)
DC 9~36V Input UPS	AUPS-A20-R10 (7.4V 3800mAH)
Bluetooth V2.0+EDR	AFL-BT-KIT02-R10

Note: Win CE application without digital microphone function

ISMM Supported Functions

	Voltage	Fan	Smart Fan	Temperature	WDT	Cash Drawer
AFL-08B-N270	V			V	V	

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3;5mm
Power Adpater	63000-FSP036RAB608-RS	1	90~264V AC; 12V DC; 36W
Power Cord	32000-000002-RS	1	1750mm (EU or US, depending on the shipment country)
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

Wide 10.2" WSVGA AFOLUX PPC

AFL-W10A-N270

Intel® Atom™ Processor N270 1.60 GHz

New Wide Screen

Features

- Wide 10.2” TFT LCD with resistive touch screen
- Fanless cooling system
- Built-in 2-megapixel camera with digital microphone module
- Selectable AT/ATX power mode through the switch inside the chassis
- System memory up to 2 GB SDRAM
- Built-in 802.11b/g/n wireless LAN
- Built-in two 1.5 W speakers
- One CompactFlash® slot
- IP 64 compliant front panel
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (Suggest over 4GB storage capacity)

Wireless 802.11b/g/n | Speakers | Fanless | F3 One Key Recovery

Specifications

Model	AFL-W10A-N270
LCD Size	Wide 10.2"
Max Resolution	1024 x 600
Brightness (cd/m²)	400
Contrast Ratio	400: 1
LCD Color	262K
Pixel Pitch (mm)	0.2175 mm (H) x 0.2175 mm (V)
Viewing Angle (H-V)	140° / 120°
Backlight MTBF	40000 hrs
SBC Model	AFLMB-945GSE-N270-R10
CPU	Intel® Atom™ processor N270 1.6GHz CPU
Chipset	Intel® 945GSE + ICH7M
RAM	Supports one 400 MHz or 533MHz DDR2 SO-DIMM (Max. 2GB)
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for GbE 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x External SATA 1 x Audio Port 1 x Power Jack
Storage	CF Type II
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Audio	AMP 1.5W + 1.5W (internal speakers)
Camera Module	2-megapixel with digital microphone
Wireless Connection	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)
Construction Front Panel	ABS + PC Plastic front frame
LED Function	1 x Power on/off LED on front panel
Mounting	Panel, Wall, Rack, Stand and Arm VESA 100mm x 100mm
Front Panel Color	Gray 7539U
Dimensions (WxHxD) (mm)	280 x 186 x 49
Operation Temperature (ºC)	-10ºC ~50ºC
Storage Temperayure (ºC)	-20ºC ~ 60ºC
N/G Weight	1.4 Kg
IP Level	IP 64 compliant front panel
Safety & EMC	CE / FCC
Touch Screen	5-wire resistive type (touch controller IC is on board)
Power Adapter	P/N: 63000-FSP036RAB608-RS 36W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12VDC
Power Consumption	28W

Fully Integrated I/O

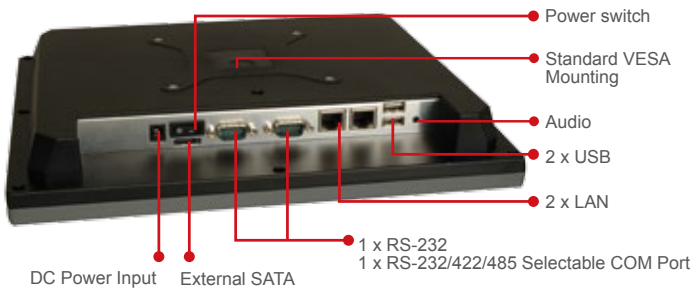

Building Automation/Access Control System

AFL-W10A Dimensions (Unit: mm)

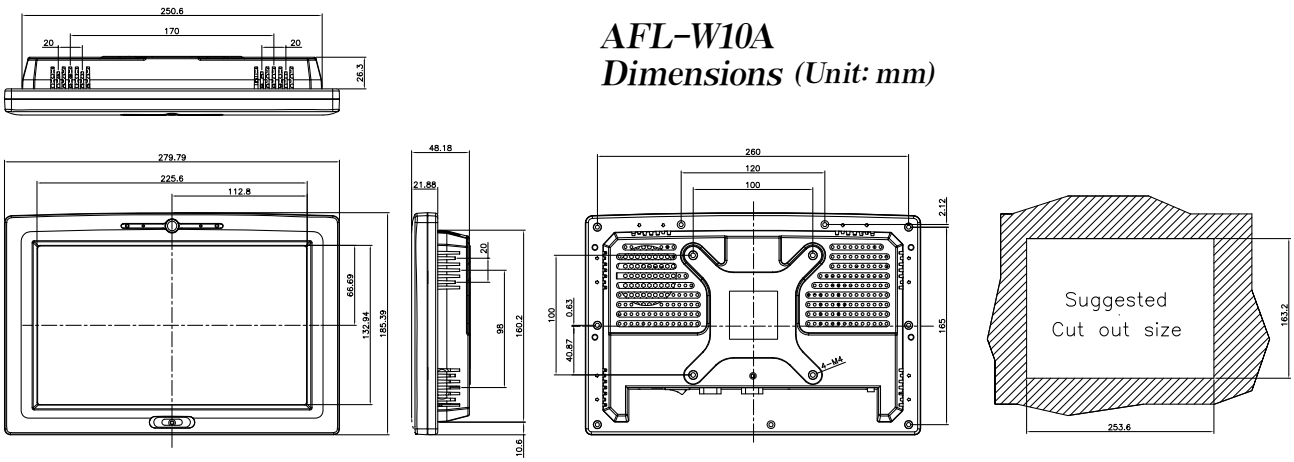

Ordering Information

Part Number	Description
AFL-W10A-N270/R/1G-R32	10.2" 400 cd/m², WSVGA fanless panel PC with Intel® Atom™ N270 1.6GHz, 802.11b/g/n wireless module, touch screen, 2megapixel camera with digital microphone, 1GB DDR2 533, R32

Options

Model		AFL-W10A-N270
Panel Mounting Kit		AFLPK-12
Wall Mounting Kit		AFLWK-19B
Rack Mounting Kit		AFLRK-W10
Arm		ARM-11-RS / ARM-31-RS
Stand		STAND-A12-RS / STAND-100-RS
VSTAND		VSTAND-A10-R11
9~30VDC to 12VDC Converter Module		IDD-930160-KIT
OS	Win CE 6.0 (128 MB CF card)	AFLCF-W10-N270-CE060-R32
	Win XPE (1 GB CF card)	AFLCF-W10-N270-XPE-R32
	LINUX (2 GB CF card)	AFLCF-W10-N270-LNX-R32
	Win 7 Embedded (4GB CF card)	AFLCF-W10-N270-WES7E-R32
Hybrid Card Reader		AFLP-10AMSI-U
Magnetic Stripe Reader		AFLP-10AMSR-U
DC 12V Input UPS		AUPS-B10-R10 (7.4V 3800mAH)
DC 9~36V Input UPS		AUPS-B20-R10 (7.4V 3800mAH)
Bluetooth V2.0+EDR		AFL-BT-KIT02-R10

Note: Win CE application without digital microphone function

ISMM Supported Functions

	Voltage	Fan	Smart Fan	Temperature	DIO	WDT	Beep	Cash Drawer
AFL-W10A-N270	V			V		V		

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3; 5mm
Power Adpater	63000-FSP036RAB608-RS	1	90~264V AC; 12V DC; 36W
Power Cord	32000-000002-RS	1	1750mm; European Standard (EU or US, depending on the shipment country)
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

10.4" SVGA AFOLUX Panel PC

AFL-10A-LX

AMD Geode™ LX 800 500 MHz Processor

AFL-10A-N270

Intel® Atom™ N270 1.6GHz Processor

AFL-10A-N26

Intel® Atom™ N2600 1.60 GHz Processor New

Advanced Features

(1) PCIe Mini card slot compatible with mSATA and PCIe Mini device

IEI patented PCIe Mini interface provides PCIe x 1 and USB signals such as PCIe Mini SSD and wireless LAN card for full-size or half-size devices!

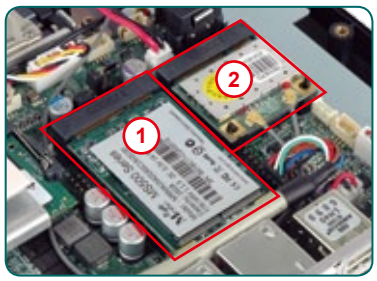

(2) Enhanced 2T2R MIMO Technology

Preinstalled 2.4GHz 802.11b/g/n Wi-Fi module supports 2Tx/2Rx 2-stream MIMO with up to 300Mbps data rate for a 40MHz channel!

Specifications

Model	AFL-10A-LX	AFL-10A-N270	AFL-10A-N26
LCD Size	10.4"		
Max Resolution	800 x 600		
Brightness (cd/m²)	400		
Contrast Ratio	700:1		
LCD Color	262K		
Pixel Pitch (mm)	0.264 (H) x 0.264 (V)		
Viewing Angle (H-V)	160° / 140°		
Backlight MTBF	50000 hrs (LED Backlight)		
SBC Model	AFLMB-LX-800	AFLMB-945GSE-N270-R10	AFLMB-CV-N2600-R10
CPU	AMD Geode™ LX 800 (500MHz)	Intel® Atom™ processor N270 1.6GHz CPU	Intel® Atom™ N2600 dual core 1.6 GHz CPU
Chipset	AMD LX 800 + AMD CS5536	Intel® 945GSE + ICH7M	Intel® NM10
RAM	Supports one 333MHz or 400MHz DDR2 SO-DIMM (Max.1GB)	Supports one 400MHz or 533MHz DDR2 SO-DIM (Max. 2GB)	One 800 MHz 204-pin DDR3 SO-DIMM slot (Max. 2GB) pre-installed wiith 2GB
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for 10/100Mbps LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Port	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for Giga LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x External SATA 1 x Audio Port 1 x Power Jack	1 x 9-28V lockable DC Jack 1 x RJ-45 for RS-232 1 x RS-232/422/485 1 x VGA 2 x GbE LAN 2 x USB 2.0 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Line out
Storage	CF Type II		mSATA
Watchdog Timer	Software programmable supports 1~255 sec. system reset		
Audio	AMP 1.5W + 1.5W (internal speakers)		AMP 2W + 2W (internal speaker)
Wireless Connection	1 x Wireless LAN 802.11 b/g Module (internal Mini PCI interface)	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)	1 x Wireless LAN 802.11b/g/n 2T2R Module (internal PCIe Mini card interface)
Construction Front Panel	ABS + PC Plastic front frame		
LED Function	1 x Power on/off LED on front panel		
Mounting	Panel, Wall, Rack, Stand and Arm VESA 75mm x 75mm / 100mm x 100mm		
Front Panel Color	Gray 7539U		
Dimensions (WxHxD) (mm)	276 x 222 x 51		
Operation Temperature (°C)	0°C ~ 50°C	-10°C ~50°C	-10°C~50°C
Storage Temperayure (°C)	-20°C ~ 60°C		
N/G Weight	1.4 Kg		
IP Level	IP 64 compliant front panel		
Safety & EMC	CE / FCC		
Touch Screen	5-wire resistive type (touch controller IC is on board)		
Power Adapter	P/N: 63000-FSP036RAB608-RS 36W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC	P/N: 63000-FSP036RAB608-RS 36W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC	P/N: 63040-010060-040-RS 60W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12V DC	12V DC	9-28V DC
Power Consumption	25W	28W	28W

Fully Integrated I/O

AFL-10A-LX

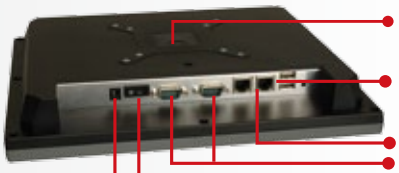

- Standard VESA mounting
- 2 x USB
- 2 x LAN
- 1 x RS-232,
  1 x RS-232/422/485 selectable COM port
- Power switch
- 12VDC power jack/
  18V~30VDC power jack

AFL-10A-N270

- Standard VESA mounting
- 2 x USB
- 2 x LAN
- 1 x RS-232
- 1 x RS-232/422/485 selectable COM port
- Audio
- Power switch
- DC power input

AFL-10A-N26

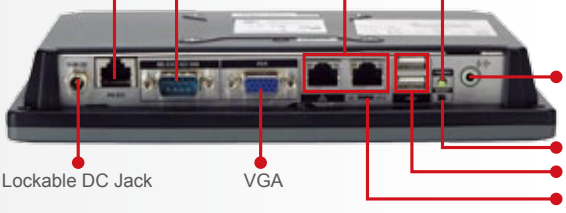

- RS-232/422/485
- 2 x LAN Port
- Power Switch
- RS-232
- Line Out
- Reset Button
- 2 x USB 2.0
- Lockable DC Jack
- VGA
- AT/ATX Switch

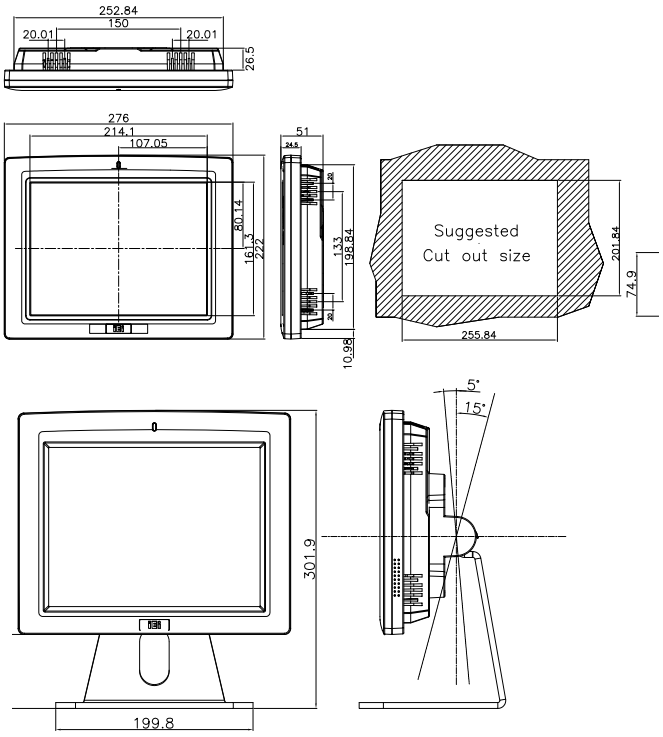

AFL-10A Dimensions (Unit: mm)

Ordering Information

Part Number	Description
AFL-10A-LX/R/256-R22	10.4" 400 cd/m², SVGA fanless panel PC with AMD LX-800 CPU, AT/ATX mode, 802.11b/g wireless module,Touch screen and 256MB DDR RAM, R22
AFL-10A-LX/R/512-R22	10.4" 400 cd/m², SVGA fanless panel PC with AMD LX-800 CPU, AT/ATX mode, 802.11b/g wireless module,Touch screen and 512MB DDR RAM, R22
AFL-10A-N270/R/1G-R23	10.4" 400cd/m² SVGA fanless panel PC with Intel® Atom™ N270 1.6GHz, 802.11b/g/n wireless module, touch screen,1GB DDR2 533,R23
AFL-10A-N26/R/2G-R10	10.4" 400cd/m² SVGA fanless panel PC with Intel® Atom™ N2600 dual core 1.6GHz, 802.11b/g/n wireless module, touch screen, 2GB DDR3, R10

Note: AFL-10A-LX24V model is without power adapter

Options

Model	AFL-10A-LX	AFL-10A-N270	AFL-10A-N26
Panel Mounting Kit	AFLPK-12		
Wall Mounting Kit	AFLWK-12		
Rack Mounting Kit	AFLRK-10		
Arm	ARM-11-RS / ARM-31-RS		
Stand	STAND-A12-RS / STAND-100-RS		
VSTAND	VSTAND-A10-R11		
9~30VDC to 12VDC Converter Module	IDD-930160-KIT		
OS: Win CE 5.0 (128 MB CF card)	AFLCF-10-LX-CE-R21	--	--
OS: Win CE 6.0 (128 MB CF card)	AFLCF-10-LX-CE060-R21	AFLCF-07-N270-CE060-R23	--
OS: Win XPE (1 GB CF card)	AFLCF-10-LX-XPE-R21	AFLCF-07-N270-XPE-R23	AFL-W07-N26-XPE-R10*
OS: LINUX (2 GB CF card)	AFLCF-10-LX-LNX-R21	AFLCF-07-N270-LNX-R23	AFL-W07-N26-LNX-R10*
OS: Win 7 Embedded (4 GB CF card or CD-ROM)	--	AFLCF-07-N270-WES7E-R23	AFL-W07-N26-WES7E-R10*
Hybrid Card Reader	AFLP-10AMSI-U		
Magnetic Stripe Reader	AFLP-10AMSR-U		
DC 12V Input UPS	AUPS-A10-R10 (7.4V 3800mAH)		
DC 9~36V Input UPS	AUPS-A20-R10 (7.4V 3800mAH)		
Bluetooth V2.0+EDR	AFL-BT-KIT02-R10		

*OS image with CD-ROM

ISMM Supported Functions

	Voltage	Fan	Smart Fan	Temperature	DIO	WDT	Cash Drawer
AFL-10A-LX	V			V		V	
AFL-10A-N270	V			V		V	
AFL-10A-N26	V			V		V	

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3; 5mm
Power Adpater	63000-FSP036RAB608-RS 63040-010060-040-RS (for AFL-10A-N26)	1	90~264V AC; 12V DC; 36W
Power Cord	32000-000002-RS	1	1750mm; European Standard
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

12.1" XGA AFOLUX Panel PC

AFL-12A-LX

AMD Geode™ LX 800 500 MHz Processor

AFL-12A-N270

Intel® Atom™ N270 1.6GHz Processor

AFL-12A-N26

Intel® Atom™ N2600 1.6GHz Processor New

Features

- 12.1" TFT LED backlight LCD with resistive touch screen
- Fanless cooling system
- 9V~28V wide range DC power input (for Intel® N2600 platform)
- Selectable AT/ATX power mode through the switch inside the chassis
- One CompactFlash® slot
- IP 64 compliant front panel
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (Suggest over 4GB storage capacity)

Wireless 802.11b/g/n | Speakers | Fanless | F3 One Key Recovery IEI symantec

Specifications

Model	AFL-12A-LX	AFL-12A-N270	AFL-12A-N26
LCD Size	12.1"		
Max Resolution	1024 x 768		
Brightness (cd/m²)	500		
Contrast Ratio	700 : 1		
LCD Color	262K		
Pixel Pitch (mm)	0.240 (H) x 0.240 (V)		
Viewing Angle (H-V)	160° / 160°		
Backlight MTBF	50000 (LED Backlight)		
SBC Model	AFLMB-LX-800	AFLMB-945GSE-N270-R10	AFLMB-CV-N2600-R10
CPU	AMD Geode™ LX 800 (500MHz)	Intel® Atom™ processor N270 1.6GHz CPU	Intel® Atom™ N2600 dual core 1.6 GHz CPU
Chipset	AMD LX 800 + AMD CS5536	Intel® 945GSE + ICH7M	Intel® NM10
RAM	Supports one 333MHz or 400MHz DDR SO-DIMM (Max. 1GB)	Supports one 400MHz or 533MHz DDR2 SO-DIMM (Max. 2GB)	One 800 MHz 204-pin DDR3 SO-DIMM slot (Max. 2GB) pre-installed wiith 2GB
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for 10/100Mbps LAN 2 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Power Jack 1 x Audio Port	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x External SATA 1 x Audio Port 1 x Power Jack	1 x 9-28V lockable DC Jack 1 x RJ-45 for RS-232 1 x RS-232/422/485 1 x VGA 2 x GbE LAN 4 x USB 2.0 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Line out
Storage	CF Type II		mSATA
Watchdog Timer	Software programmable supports 1~255 sec. system reset		
Audio	AMP 1.5W + 1.5W (internal speaker)		AMP 2W + 2W (internal speaker)
Wireless Connection	1 x Wireless LAN 802.11 b/g Module (internal Mini PCI interface)	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)
Drive Bay	1 x 2.5" IDE HDD bay	1 x 2.5" SATA HDD bay	1 x 2.5" SATA HDD & 1 x mSATA SSD
Construction Front Panel	ABS + PC Plastic front frame		
LED Function	1 x Power on/off LED on front panel		
Mounting	Panel, Wall, Rack, Stand and Arm VESA 75mm x 75mm / 100mm x 100mm		
Front Panel Color	Gray 7539U		
Dimensions (WxHxD) (mm)	304 x 246 x 50		
Operation Temperature (°C)	0°C ~ 50°C	0°C ~40°C with SATA HDD -10°C ~50°C with CF Card or SATA interface 2.5" SSD HDD	-10°C~50°C
Storage Temperayure (°C)	-20°C ~ 60°C		
N/G Weight	1.8 Kg		
IP Level	IP 64 compliant front panel		
Safety & EMC	CE / FCC		
Touch Screen	5-wire resistive type (touch controller IC is on board)		
Power Adapter	P/N: 63000-FSP036RAB608-RS 36W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC	P/N: 63000-FSP050DBAB1405-RS 50W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC	P/N: 63040-010060-040-RS 60W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12VDC	12VDC	9-28V DC
Power Consumption	29W	32W	32W

Fully Integrated I/O

AFL-12A-LX

- Standard VESA mounting
- 2 x USB
- 2 x LAN
- 1 x RS-232
  1 x RS-232/422/485 selectable COM port
- Power switch
- DC power input
  or 18~30VDC input

AFL-12A-N270

- Standard VESA mounting
- 4 x USB
- 2 x LAN
- 1 x RS-232
  1 x RS-232/422/485 selectable COM port
- Power switch
- DC power input
- Audio

AFL-12A-N26

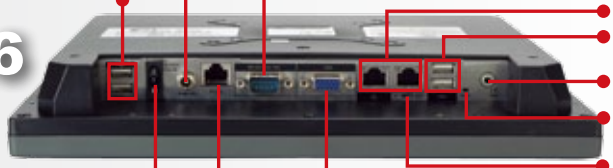

- Lockable DC Jack
- 2 x USB 2.0
- RS-232/422/485
- 2 x LAN Port
- 2 x USB 2.0
- Line Out
- Reset Button
- AT/ATX Switch
- VGA
- RS-232
- Power Switch

AFL-12A Dimensions (Unit: mm)

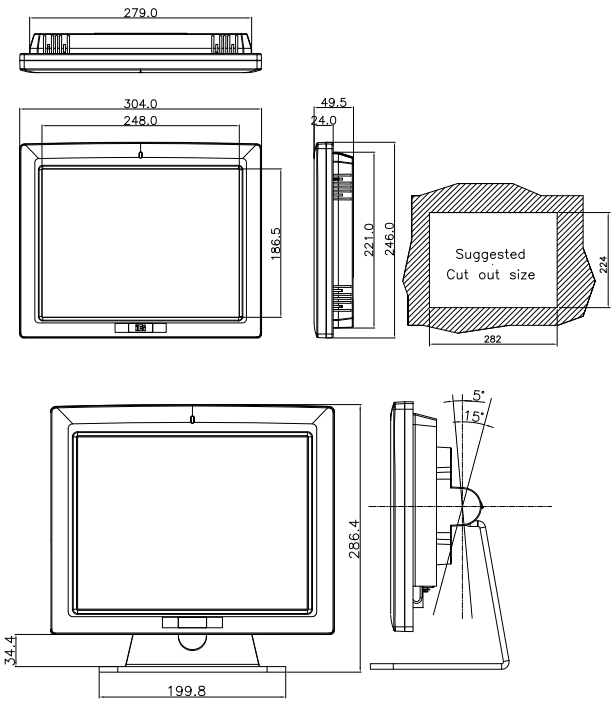

AFL-12B Dimensions (Unit: mm)

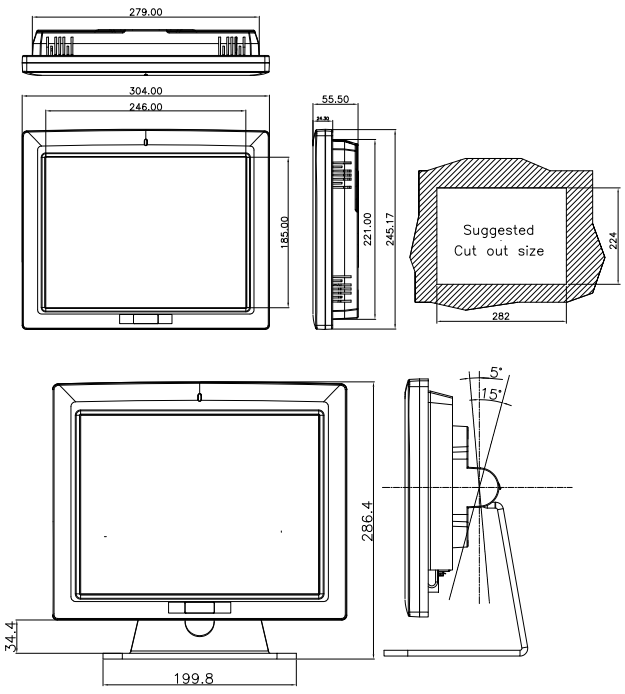

Ordering Information

Part Number	Description
AFL-12A-LX/R/256-R22	12.1" 500 cd/m², XGA fanless panel PC with AMD LX-800 CPU, AT/ATX mode, 802.11b/g wireless module, touch screen and 256MB DDR RAM, R22
AFL-12A-LX/R/512-R22	12.1" 500 cd/m², XGA fanless panel PC with AMD LX-800 CPU, AT/ATX mode, 802.11b/g wireless module, touch screen and 512MB DDR RAM, R22
AFL-12A-N270/R/1G-R23	12.1" 500 cd/m², XGA fanless panel PC with Intel® Atom™ N270 1.6GHz, 802.11b/g/n wireless module, capitalize touch screen, 1GB DDR2 533MHz, R23
AFL-12A-N26/R/2G-R10	12.1" 500cd/m², XGA fanless panel PC with Intel® Atom™ cedarview N2600 dual core 1.6GHz, 802.11b/g/n wireless module, touch screen, 2GB DDR3, R10

Options

Model	AFL-12A-LX	AFL-12A-N270	AFL-12A-N26
Panel Mounting Kit	AFLPK-12		
Wall Mounting Kit	AFLWK-12		
Rack Mounting Kit	AFLRK-12		
Arm	ARM-11-RS / ARM-31-RS		
Stand	STAND-A12-RS/STAND-100-RS		STAND-A12-RS / STAND-100-RS
VSTAND	VSTAND-A12		
9~30VDC to 12VDC Converter Module	IDD-930160-KIT		
OS: Win CE 5.0 (128 MB CF card)	AFLCF-12-LX-CE-R21	--	--
OS: Win XPE (1 GB CF card)	AFLCF-12-LX-XPE-R21	AFLCF-07-N270-XPE-R23	AFL-W07-N26-XPE-R10*
OS: LINUX (2 GB CF card)	AFLCF-12-LX-LNX-R21	AFLCF-07-N270-LNX-R23	AFL-W07-N26-LNX-R10*
OS: Win 7 Embedded (4 GB CF card or CD-ROM)	--	AFLCF-07-N270-WES7E-R23	AFL-W07-N26-WES7E-R10*
Hybrid Card Reader	AFLP-12AMSI-U		
Magnetic Stripe Reader	AFLP-12AMSR-U		
DC 12V Input UPS	AUPS-A10-R10 (7.4V 3800mAH)		
DC 9~36V Input UPS	AUPS-A20-R10 (7.4V 3800mAH)		
Bluetooth V2.0+EDR	AFL-BT-KIT02-R10	AFL-BT-KIT03-R10	AFL-BT-KIT01-R10

ISMM Supported Functions

	Voltage	Fan	Smart Fan	Temperature	DIO	WDT	Cash Drawer
AFL-12A-LX	V			V		V	
AFL-12A-N270	V			V		V	
AFL-12A-N26	V			V		V	

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3; 5mm
Power Adpater	63000-FSP036RAB608-RS 63000-FSP050DBAB1405-RS 63040-010060-040-RS	1	90~264V AC; 12V DC; 36W (for LX) 90~264V AC; 12V DC; 50W (for LXPOS, N270) 90~264V AC; 12V DC; 60W (for N2600)
Power Cord	32000-000002-RS	1	1750mm; European Standard
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

15” XGA AFOLUX Panel PC

AFL-15A(E)-N270

Intel® Atom™ N270 1.6GHz Processor

Features

- 15" TFT LCD with resistive touch screen
- System memory up to 2 GB RAM
- Built-in 802.11b/g (or 802.11b/g/n) wireless LAN
- Selectable AT/ATX power mode through the switch inside the chassis
- Built-in two speakers
- One CompactFlash® slot
- IP 64 compliant front panel
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (over 4GB storage capacity is suggested)

Specifications

Model	AFL-15A(E)-N270 Fanless
LCD Size	15”
Max Resolution	1024 x 768
Brightness (cd/m²)	350 or 250
Contrast Ratio	700:1 or 600:1
LCD Color	262K or 16.7M
Pixel Pitch (mm)	0.297(H) x 0.297(V)
Viewing Angle (H-V)	140º/125º or 160º/160º
Backlight MTBF	50000 or 40000 hrs
SBC Model	AFLMB2-945GSE-N270-R10
CPU	Intel® Atom™ N270 1.6GHz processor
Chipset	Intel® 945GSE + ICH7M
RAM	Supports one 400MHz or 533MHz DDR2 SO-DIMM (Max. 2GB)
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for GbE 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Audio Port (line-out) 1 x VGA Port 1 x Power Jack
Storage	CF Type II
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Audio	AMP 1.5W + 1.5W (internal speakers)
Wireless Connection	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini interface)
Construction Front Panel	ABS + PC Plastic front frame
LED Function	1 x Power on/off LED on front panel
Mounting	Panel, Wall, Rack, Stand and Arm, VESA 100mm x 100mm
Front Panel Color	Sliver (877U) & Gray (ABSA2037)
Dimensions (WxHxD) (mm)	394 x 309 x 61
Operation Temperature (°C)	0°C ~40°C with SATA HDD -10°C ~50°C with CF Card or SATA interface 2.5” SSD HDD
Storage Temperature (°C)	-20°C ~ 60°C
N/G Weight	3.2 Kg
IP Level	IP 64 compliant front panel
Safety & EMC	CE / FCC
Touch Screen	5-wire resistive type (Touch controller IC is on board) or Capacitive type touch screen without HDD bay
Power Adapter	P/N: 63000-FSP060DBAB1554-RS 60W Power Adapter Input: 90VAC~264VAC, 50/60Hz / Output: 12VDC
Power Requirement	12VDC
Power Consumption	49W

15" XGA AFOLUX Panel PC

AFL-15i(E)-HM55

Intel® Core™ i7/i5/i3/Celeron® Processor

Dual Independent Display!

NEW Features in HM55 Platform :

- Powered by high performance 2.66 GHz Intel® Core i7-620M CPU with Intel® HM55 chipset
- DDR3 1066MHz system memory up to 4GB
- HDMI/VGA port delivers high quality image on the second display
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (over 4GB storage capacity is suggested)

Wireless 802.11b/g/n | Speakers | Fanless | F3 One Key Recovery

Specifications

Model	AFL-15i(E)-HM55
LCD Size	15"
Max Resolution	1024 x 768
Brightness (cd/m²)	400 or 250
Contrast Ratio	700:1 or 600:1
LCD Color	262K or 16.7M
Pixel Pitch (mm)	0.297(H) x 0.297(V)
Viewing Angle (H-V)	160°/140° or 160°/160°
Backlight MTBF	50000 hrs (LED backlighting) or 40000 hrs
SBC Model	AFLMB2-HM55-R10
CPU	Intel® Core™ i7/i5/i3/Celeron® Processor
Chipset	Intel® HM55
RAM	Two 204-pin 800/1066MHz DDR3 dual-channel SO-DIMMs supported (Max. 8GB)
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Audio Port (Line-out) 1 x VGA 1 x Power Jack 1 x HDMI Port
Storage	SATA SSD
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Audio	AMP 3W + 3W (internal speakers)
Wireless Connection	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)
Drive Bay	1 x 2.5" SATA HDD bay
Construction Front Panel	ABS + PC Plastic front frame
Membrane Keypad	LCD on/off, Brightness up/down, Volume up/down (5 keys)
LED Function	1 x Power on/off LED on front panel
Mounting	Panel, Wall, Rack, Stand and Arm VESA 100mm x 100mm
Front Panel Color	Sliver (877U) & Gray (ABSA2037)
Dimensions (WxHxD) (mm)	394 x 309 x 66
Operation Temperature (°C)	0°C~50°C
Storage Temperayure (°C)	-20°C ~ 60°C
N/G Weight	5.8 Kg
IP Level	Front Frame IP64
Touch Screen	Resistive Type 5-Wire (Touch controller IC is on board) or Capacitive type touch screen without HDD bay
Power Adapter	P/N: 63000-FSP096AHB-RS 96W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12VDC
Power Consumption	80W

Fully Integrated I/O

AFL-15A-N270

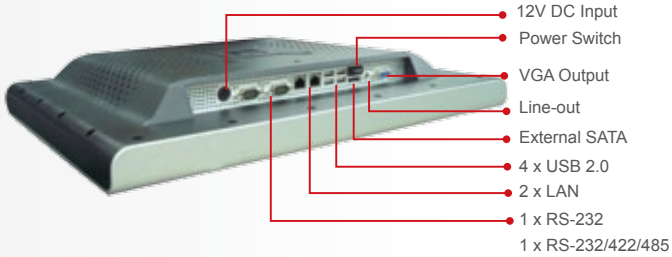

AFL-15i-HM55

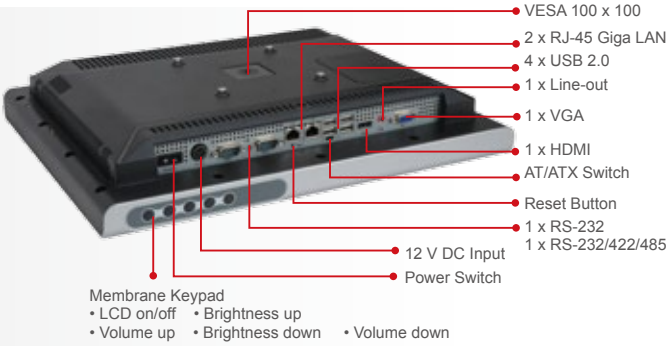

AFL-15A Dimensions (Unit: mm)

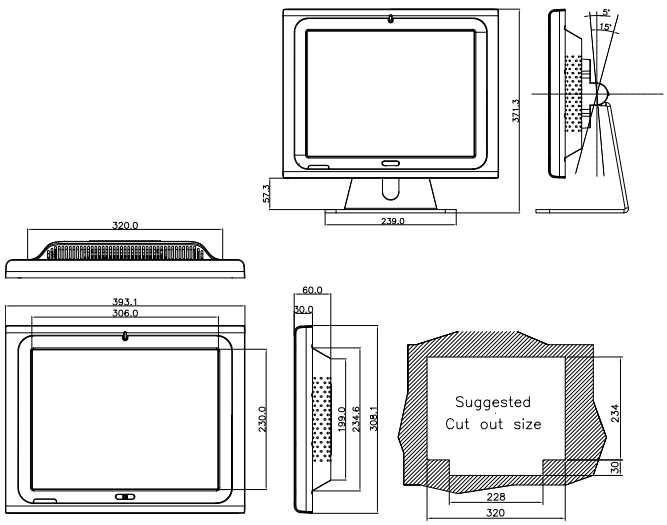

AFL-15i Dimensions (Unit: mm)

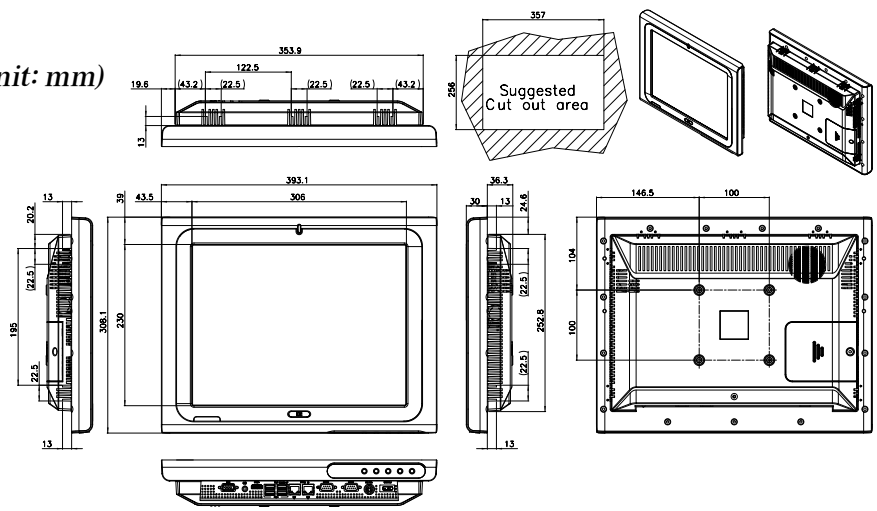

Ordering Information

• High Luminance (400 cd/m²)

Part Number	Description
AFL-15A-N270/R/1G-R30	15" 400cd/m² XGA LED backlighting fanless panel PC with Intel® Atom™ N270 1.6GHz CPU, 1GB DDR2 RAM, 802.11b/g/n wireless module, touch screen, R30
AFL-15i-HM55-P45/R/1G-R20	15" 400cd/m² XGA LED backlighting panel PC with Intel® Celeron P4500 1.86G CPU, 1GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R20
AFL-15i-HM55i3-35/R/2G-R20	15" 400cd/m² XGA LED backlighting panel PC with Intel® Core™ i3-350M 2.26G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R20
AFL-15i-HM55i5-52/R/2G-R20	15" 400cd/m² XGA LED backlighting panel PC with Intel® Core™ i5-520M 2.4G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R20
AFL-15i-HM55i7-62/R/2G-R20	15" 400cd/m² XGA LED backlighting panel PC with Intel® Core™ i7-620M 2.66G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R20

• Regular Luminance (250 cd/m²)

Part Number	Description
AFL-15AE-N270/R/1G-R22	15" 250cd/m² XGA fanless panel PC with Intel® Atom™ N270 1.6GHz CPU, 1GB DDR2 RAM, 802.11b/g/n wireless module, touch screen, R22
AFL-15iE-HM55-P45/R/1G-R12	15" 250cd/m² XGA panel PC with Intel® Celeron P4500 1.86G CPU, 1GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R12
AFL-15iE-HM55i3-35/R/2G-R12	15" 250cd/m² XGA panel PC with Intel® Core™ i3-350M 2.26G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R12
AFL-15iE-HM55i5-52/R/2G-R12	15" 250cd/m² XGA panel PC with Intel® Core™ i5-520M 2.4G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R12
AFL-15iE-HM55i7-62/R/2G-R12	15" 250cd/m² XGA panel PC with Intel® Core™ i7-620M 2.66G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R12,

ISMM Supported Functions

	Voltage	Fan	Smart Fan	Temperature	WDT	Cash Drawer
AFL-15i(E)-HM55	V	V	V	V	V	
AFL-15A(E)-N270	V			V	V	

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3;5mm
Power Adpater	63040-010060-030-RS 63040-010060-050-RS 63040-010096-010-RS	1	90~264V AC; 12V DC; 60W (15A-N270) 90~264V AC; 12V DC; 96W (15i-HM55)
Power Cord	32000-000002-RS	1	1750mm; European Standard
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

Options

Model	AFL-15A(E)-N270	AFL-15i(E)-HM55
Panel Mounting Kit	AFLPK-15	AFLPK-15B
Wall Mounting Kit	AFLWK-19B	
Rack Mounting Kit	AFLRK-15-R11	N/A
Arm	ARM-11-RS / ARM-31-RS	
Stand	STAND-A19-RS / STAND-A21-R10-R10 / STAND-210-R11	
OS: Win CE 6.0 (128 MB CF card)	AFLCF-15-N270-CE060-R30	--
OS: Win XPE (1 GB CF card)	AFLCF-15-N270-XPE-R30	AFLSD-15-HM55-2G-XPE-R20 (2GB SATA SSD)
OS: LINUX (2 GB CF card)	AFLCF-15-N270-LNX-R30	--
OS: Win 7 Embedded (2GB CF card)	AFLCF-15-N270-WES7E-R30	AFLSD-15-HM55-4G-WES7E-R20 (4GB SATA SSD)
Hybrid Card Reader	AFLP-17AMSI-U	
Magnetic Stripe Reader	AFLP-17AMSR-U	
DC 12V Input UPS	AUPS-B10-R10 (14.8V 3800mAH)	
DC 9~36V Input UPS	AUPS-B20-R10 (14.8V 3800mAH)	
Bluetooth V2.0+EDR	AFL-BT-KIT04-R10	AFL-BT-KIT01-R10

15" Wide 1366 x 768 AFOLUX Panel PC

AFL-W15A-N270

Intel® Atom™ N270 1.6GHz Processor

AFL-W15A-GM45

Intel® Core™ 2 Duo T9400 2.53GHz Processor (Max.)

Membrane Keypad for LCD On/Off, Brightness Down/Up, Volume Down/Up, Lock, Ambient Light Sensor On/Off Control

Ambient Light Sensor

2-mega Pixel Camera (with Low Light Function) and Digital Microphone

HDMI High-Definition Multimedia Interface (for GM45 Systems Only)

Features

- 15” wide screen all-in-one system with resistive touch panel
- IEEE 802.11b/g/n Wi-Fi connection
- New High-Definition multimedia HDMI interface (for Intel® GM45 system)
- Ambient light sensor detects ambient light for automated screen adjustments.
- VESA-mountable for flexibility in mounting and deployment
- Membrane keypad to control LCD backlight, panel brightness, speakers volume, ambient light sensor and lock the keypad functions
- Software system settings utility support
- Support for Windows CE, Windows XP Embedded and Linux (optional)
- IP 64 compliant front panel

Infrared Remote Control

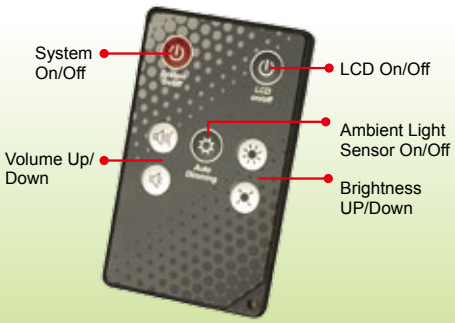

Ambient Light Sensor

The AFL-W15A series has a built-in ambient light sensor on the front panel to automatically detect the amount of light in the viewing environment and auto-adjust the brightness of the screen.

Benefits:

- More comfortable viewing decreases eye strain and tiredness
- Power consumption saving
- Extend lamp lifetime

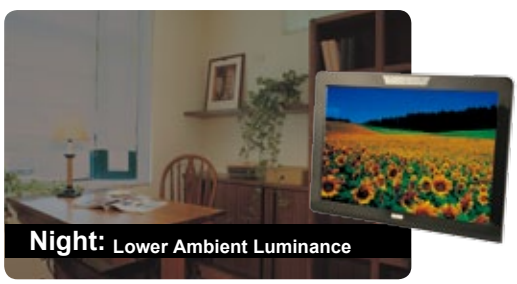

Fully Integrated I/O

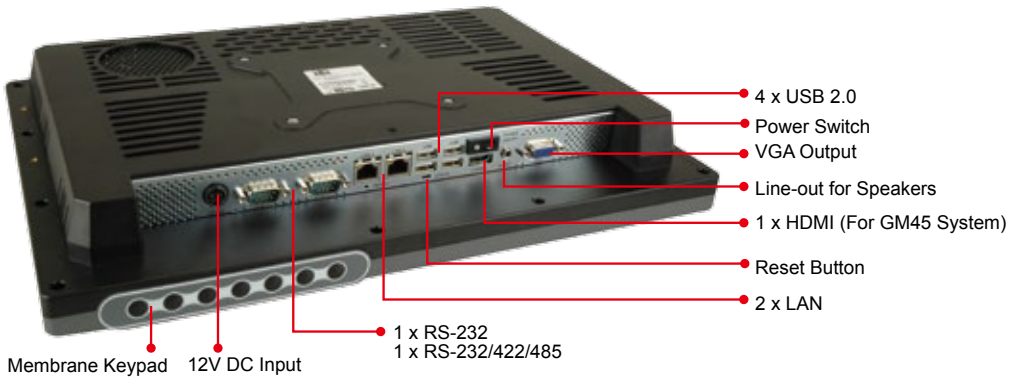

Specifications

Fanless

Model	AFL-W15A-N270	AFL-W15A-GM45
LCD Size	15.6"	
Max Resolution	1366 x 768	
Brightness (cd/m²)	300	
Contrast Ratio	500 : 1	
LCD Color	16.7M	
Pixel Pitch (mm)	0.252 (W) x 0.252 (H)	
Viewing Angle (H-V)	170° / 160°	
Backlight MTBF	50000 hrs (LED backlight)	
SBC Model	AFLMB2-945GSE-N270-R10	AFLMB2-GM45-R10
CPU	Intel® Atom™ N270 1.6GHz CPU	Intel® Celeron® M 575 2.0GHz CPU Intel® Core™2 Duo P8400 2.26GHz CPU Intel® Core™2 Duo T9400 2.53GHz CPU
Chipset	Intel® 945GSE + ICH7M	Intel® GM45 Chipset + ICH9M
RAM	Supports one 400MHz or 533MHz DDRII SO-DIMM (Max. 2GB)	Supports two 667MHz or 800MHz DDR2 SO-DIMM (Max. 4GB)
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Audio Port 1 x VGA Port 1 x Power Jack	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x HDMI Port 1 x Audio Port 1 x VGA Port 1 x Power Jack
SSD	CF Type II	
Watchdog Timer	Software programmable supports 1~255 sec. system reset	
Audio	AMP 3W + 3W (internal speakers)	
Camera Module	2megapixel camera (with low light function) and digital microphone	
Wireless Connection	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)	
Construction Front Panel	ABS + PC Plastic front frame	
Membrane Keypad	LCD On/Off, Brightness Down/Up, Volume Down/Up, Lock, Ambient Light Sensor On/Off (OSD Lock: Lock button+ ALS button) (7 keys)	
Infrared Remote Control	LCD On/Off, Brightness Up/Down, Volume Up/Down, System On/Off, Ambient Light Sensor On/Off	
Ambient Light Sensor	Yes	Yes
Mounting	Panel, Wall, Stand and Arm VESA 100mm x 100mm	
Front Panel Color	Gray 7539U	
Dimensions (WxHxD) (mm)	400 x 273 x 63	400 x 273 x 63
Operation Temperature (°C)	0°C ~40°C with SATA HDD -10°C ~50°C with CF Card or SATA interface 2.5" SSD HDD	
Storage Temperature (°C)	-20°C ~60°C	
N/G Weight	3.3 Kg	
IP Level	IP 64 compliant front panel	
Safety & EMC	CE / FCC	
Touch Screen	5-wire Resistive Type (Touch controller IC is on board)	
Power Adapter	P/N: 63000-FSP060DBAB1554-RS 60W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC	P/N: 63000-FSP096AHB-RS 96W Power Adapter Input: 90VAC~264VAC,50/60Hz Output: 12VDC
Power Requirement	12VDC	
Power Consumption	50W	90W

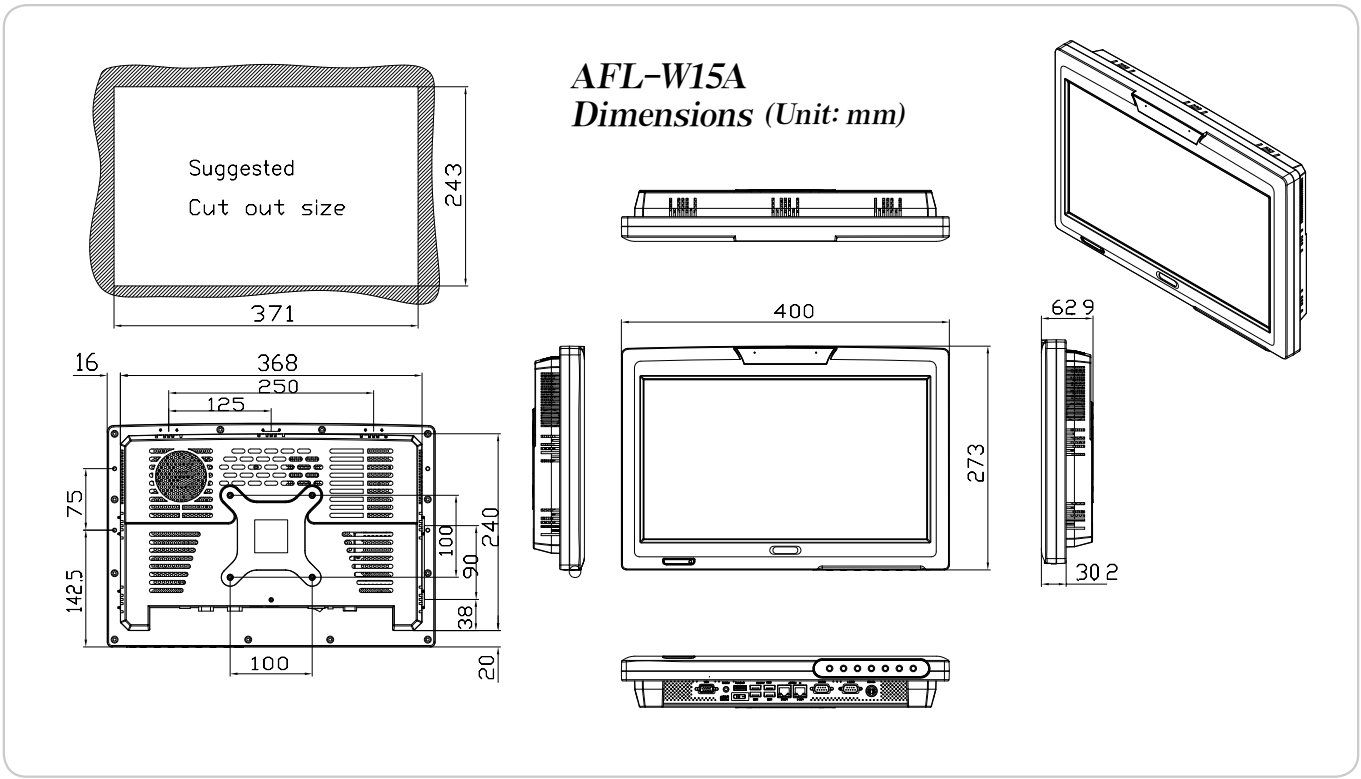

Ordering Information

Part Number	Description
AFL-W15A-N270/R/1G-R30	15.6" 300cd/m² 1366x768 LED backlighting panel PC with Intel® Atom™ N270 1.6GHz CPU, 1GB DDR2 RAM, 802.11b/g/n wireless module, touch screen, 2megapixel camera, microphone, R30
AFL-W15A-GM45-CM5/R/1G-R30	15.6" 300cd/m² 1366x768 LED backlighting panel PC with Intel® Celeron® 2.0GHz CPU, 1GB DDR2 RAM, 802.11b/g/n WiFi, touch screen, 2megapixel camera, microphone, R30
AFL-W15A-GM45-P84/R/2G-R30	15.6" 300cd/m² 1366x768 LED backlighting panel PC with Intel® Core™2 Duo P8400 2.26GHz CPU, 2GB DDR2 RAM, 802.11b/g/n WiFi, touch screen, 2megapixel camera, microphone, R30
AFL-W15A-GM45-T94/R/2G-R30	15.6" 300cd/m² 1366x768 LED backlighting panel PC with Intel® Core™2 Duo T9400 2.53GHz CPU, 2GB DDR2 RAM, 802.11b/g/n WiFi, touch screen, 2megapixelcamera, microphone, R30

Options

Model	AFL-W15A-N270	AFL-W15A-GM45
Panel Mounting Kit	AFLPK-15B	
Wall Mounting Kit	AFLWK-19B	
Rack Mounting Kit	AFLRK-W15	
Arm	ARM-11-RS / ARM-31-RS	
Stand	STAND-A19-RS / STAND-A21-R10 / STAND-210-R11	
OS: Win CE 6.0 (128 MB CF card)	AFLCF-15-N270-CE060-R30	N/A
OS: Win XPE (1 GB CF card)	AFLCF-15-N270-XPE-R30	AFLCF-W15-GM45-XPE-R30
OS: Win LINUX (2 GB CF card)	AFLCF-15-N270-LNX-R30	AFLCF-W15-GM45-LNX-R30
OS: Win 7 Embedded (4GB CF card)	AFLCF-15-N270-WES7E-R30	AFLCF-W15-GM45-WES7E-R30
Hybrid Card Reader	AFLP-W15AMSI-U	
Magnetic Stripe Reader	AFLP-W15AMSR-U	
DC 12V Input UPS	AUPS-B10-R10 (VESA 100, DC 12V input, 12V output 100W UPS module with 3800mAH)	
DC 9~36V Input UPS	AUPS-B20-R10 (VESA 100, DC 9~36V input, 12V output 100W UPS module with 3800mAH)	
Bluetooth V2.0+EDR	AFL-BT-KIT04-R10	AFL-BT-KIT03-R10

Note: Win CE application without digital microphone function

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3; 5mm
Power Adpater	63000-FSP096AHB-RS 63000-FSP060DBAB1554-RS	1	90~264V AC; 12V DC; 96W (W15A-GM45) 90~264V AC; 12V DC; 60W (W15A-N270)
Power Cord	32000-000002-RS	1	1750mm (EU or US, depending on the shipment country)
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

ISMM Supported Functions

	Voltage	Fan	Smart Fan	Temperature	WDT	Cash Drawer
AFL-W15A-N270	V			V	V	
AFL-W15A-GM45	V	V	V	V	V	

17" SXGA AFOLUX Panel PC

AFL-17i(E)-HM55

Intel® Core™ i7/i5/i3/Celeron® Processor

New HM55 Platform Features:

- Powered by high performance 2.66 GHz Intel® Core i7-620M CPU with Intel® HM55 chipset
- DDR3 1066MHz system memory up to 4GB
- HDMI port delivers high image quality on the second display
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (over 4GB storage capacity is suggested)

Specifications

Model	AFL-17i-HM55
LCD Size	17"
Max Resolution	1280 x 1024
Brightness (cd/m²)	380
Contrast Ratio	800 : 1
LCD Color	16.7M
Pixel Pitch (mm)	0.264 (H) x 0.264 (V)
Viewing Angle (H-V)	160° / 160°
Backlight MTBF	50000 hrs
SBC Model	AFLMB2-HM55-R10
CPU	Intel® Core™ i7/i5/i3/Celeron® Processor
Chipset	Intel® HM55
RAM	Two 204-pin 800/1066MHz DDR3 dual-channel SO-DIMMs supported (Max. 8GB)
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Audio Port (Line-Out) 1 x VGA 1 x Power Jack 1 x HDMI Port
Storage	SATA SSD
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Audio	AMP 3W + 3W (internal speakers)
Wireless Connection	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)
Drive Bay	1 x 2.5" SATA HDD bay
Construction Front Panel	ABS + PC Plastic front frame
Membrane Keypad	LCD On/Off, Brightness Up/Down, Volume Up/Down (5 keys)
LED Function	1 x Power on/off LED on front panel
Mounting	Panel, Wall, Rack, Stand and Arm VESA 100mm x 100mm
Front Panel Color	Sliver (877U) & Gray (ABSA2037)
Dimensions (WxHxD) (mm)	428 x 350 x 71
Operation Temperature (°C)	0°C ~ 50°C
Storage Temperature (°C)	-20°C ~60°C
N/G Weight	6.0 Kg
IP Level	IP 64 compliant front panel
Touch Screen	5-wire resistive type (touch controller IC is on board) or Capacitive type touch screen without HDD bay
Power Adapter	P/N: 63000-FSP096AHB-RS 96W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12VDC
Power Consumption	85W

17" SXGA AFOLUX Panel PC

AFL-17D-N270

Intel® Atom™ N270 1.6GHz Processor

AFL-17D-GM45

Intel® Core™2 Duo T9400 2.53GHz Processor

Digital Camera:
300K Camera with Low Light Function

Deep Glossy Black Surface

5-key membrane keypad

(for GM45 systems)

Easy access CF card

Convenient USBs on the side

Built-in ODD (optional)

Specifications

Fanless

Model	AFL-17D-N270	AFL-17D-GM45
LCD Size	17"	
Max Resolution	1280 x 1024	
Brightness (cd/m²)	300	
Contrast Ratio	800 : 1	
LCD Color	16.7M	
Pixel Pitch (mm)	0.264 (H) x 0.264 (V)	
Viewing Angle (H-V)	160º / 160º	
Backlight MTBF	50000 hrs	
SBC Model	AFLMB2-N270-R10	AFLMB2-GM45-R10
CPU	Intel® Atom™ processor N270 1.6GHz CPU	Intel® Celeron® M 575 2.0GHz CPU Intel® Core™ 2 Duo P8400 2.26GHz CPU Intel® Core™ 2 Duo T9400 2.53GHz CPU
Chipset	Intel® 945GSE + ICH7M	Intel® GM45 Chipset + ICH9M
RAM	Supports one 400MHz or533MHz DDR2 SO-DIMMs (Max. 2GB)	Supports two 667MHz or 800MHz DDR2 SO-DIMMs (Max. 4GB)
I/O Ports	1 x RS- 232 COM port 1 x RS-232/422/485 COM port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power switch 1 x Reset button 1 x Audio port 1 x VGA port 1 x Power jack	1 x RS-232 COM port 1 x RS-232/422/485 COM port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power switch 1 x Reset button 1 x HDMI port 1 x Audio port 1 x VGA port 1 x Power jack
Storage	CF Type II	
Watchdog Timer	Software programmable supports 1~255 sec. system reset	
Audio	AMP 3W + 3W (internal speakers)	
Camera Module	300K pixel with digital microphone	
Wireless Connection	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)	
Drive Bay	1 x 2.5" SATA HDD bay, 1 x Slim Type CD-ROM bay	
Construction Front Panel	ABS + PC Plastic front frame	
Membrane Keypad	LCD On/Off, Brightness Up/Down, Volume Up/Down (5 keys)	
LED Function	1 x Power on/off LED on front panel	
Mounting	Panel, Wall, Rack, Stand and Arm VESA 100mm x 100mm	
Front Panel Color	Black C	
Dimensions (WxHxD) (mm)	410 x 349 x 83	
Operation Temperature (°C)	0°C ~40°C with SATA HDD -10°C ~50°C with CF Card or SATA interface 2.5" SSD HDD	0ºC ~40ºC with SATA HDD 0ºC ~45ºC with CF Card or SATA interface 2.5" SSD HDD
Storage Temperature (°C)	-20°C ~60°C	
N/G Weight	6.2 Kg	
IP Level	IP 64 compliant front panel	
Safety & EMC	CE / FCC	
Touch Screen	5-wire resistive type (touch controller IC is on board) or Capacitive type touch screen without HDD bay	
Power Adapter	P/N: 63000-FSP084DMBA1308-RS 84W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC	P/N: 63000-FSP150AHAN1808-RS 150W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12VDC	
Power Consumption	58W	90W

Fully Integrated I/O

• AFL-17D-N270/AFL-17D-GM45

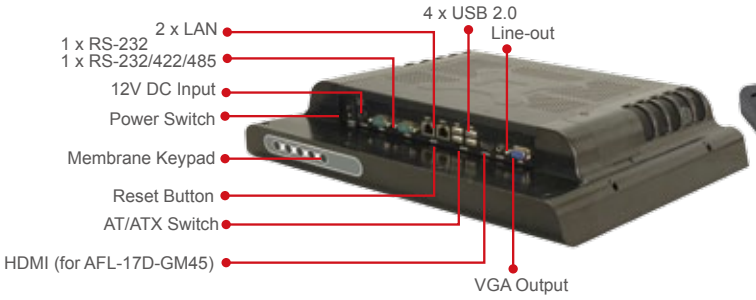

• AFL-17i-HM55

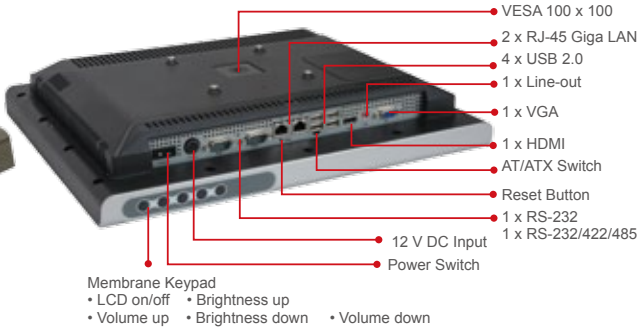

AFL-17D Dimensions (Unit: mm)

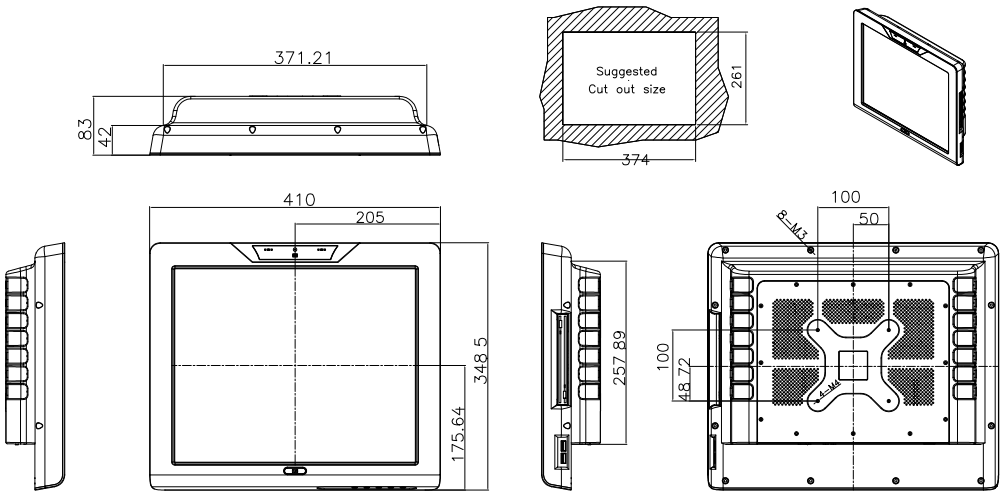

AFL-17i-HM55 Dimensions (Unit: mm)

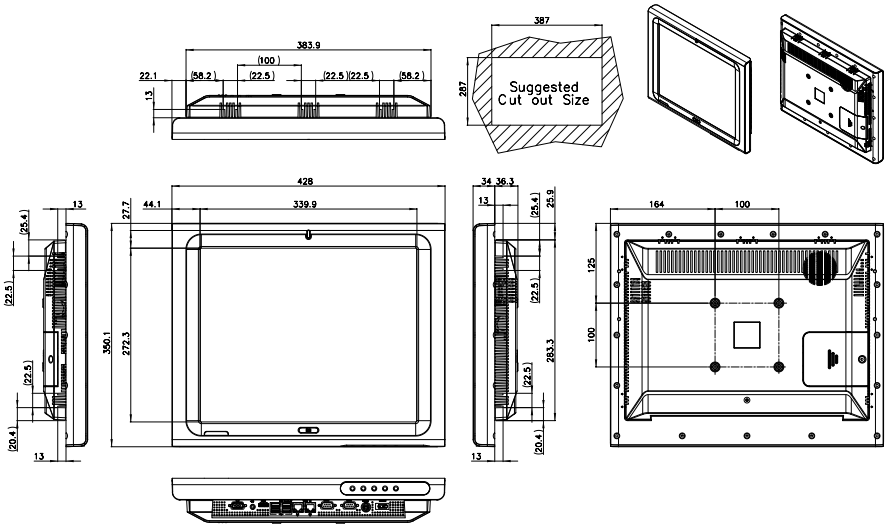

Ordering Information

Part Number	Description
AFL-17D-N270/R/1G-R22	17" 300cd/m² SXGA fanless panel PC with Intel® Atom™ N270 1.6GHz CPU, 1GB DDR2 RAM, 802.11b/g/n wireless module, touch screen, 300K camera, microphone, R22
AFL-17D-N270/RD/1G-R22	17" 300cd/m² SXGA fanless panel PC with Intel® Atom™ N270 1.6GHz CPU, 1GB DDR2 RAM, 802.11b/g/n Wi-Fi, touch screen, 300K camera, microphone, DVD-COMBO, R22
AFL-17D-GM45-CM5/R/1G-R23	17" 300cd/m² SXGA panel PC with Celeron® M 2.0GHz CPU, 1GB DDR2 RAM, 802.11b/g/n wireless module, touch screen, 300K camera, microphone, R23
AFL-17D-GM45-P84/R/2G-R23	17" 300cd/m² SXGA panel PC with Intel® Core™2 Duo P8400 2.26GHz CPU, 2GB DDR2 RAM, 802.11b/g/n wireless module, touch screen, 300K camera, microphone, R23
AFL-17D-GM45-T94/R/2G-R23	17" 300cd/m² SXGA panel PC with Intel® Core™2 Duo T9400 2.53GHz CPU, 2GB DDR2 RAM, 802.11b/g/n wireless module, touch screen, 300K camera, microphone, R23
AFL-17D-GM45-CM5/RD/1G-R23	17" 300cd/m² SXGA panel PC with Celeron® M 2.0GHz CPU, 1GB DDR2 RAM, 802.11b/g/n Wi-Fi, touch screen, 300K camera, microphone, DVD-RW, R23
AFL-17D-GM45-P84/RD/2G-R23	17" 300cd/m² SXGA panel PC with Intel® Core™2 Duo P8400 2.26GHz CPU, 2GB DDR2 RAM, 802.11b/g/n Wi-Fi, touch screen, 300K camera, microphone, DVD-RW, R23
AFL-17D-GM45-T94/RD/2G-R23	17" 300cd/m² SXGA panel PC with Intel® Core™2 Duo T9400 2.53GHz CPU, 2GB DDR2 RAM, 802.11b/g/n Wi-Fi, touch screen, 300K camera, microphone, DVD-RW, R23
AFL-17i-HM55-P45/R/1G-R12	17" 380cd/m² SXGA panel PC with Intel® Celeron® P4500 1.86G CPU, 1GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R12
AFL-17i-HM55i3-35/R/2G-R12	17" 380cd/m² SXGA panel PC with Intel® Core™ i3-350M 2.26G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R12
AFL-17i-HM55i5-52/R/2G-R12	17" 380cd/m² SXGA panel PC with Intel® Core™ i5-520M 2.4G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R12
AFL-17i-HM55i7-62/R/2G-R12	17" 380cd/m² SXGA panel PC with Intel® Core™ i7-620M 2.66G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R12

ISMM Supported Functions

	Voltage	Fan	Smart Fan	Temperature	WDT
AFL-17i-HM55	V	V	V	V	V
AFL-17D-N270	V			V	V
AFL-17D-GM45	V	V	V	V	V

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3; 5mm
Power Adpater	63000-FSP084DMBA1308-RS 63000-FSP096AHB-RS 63000-FSP150AHAN1808-RS	1	90~264V AC; 12V DC; 84W (17D-N270) 90~264V AC; 12V DC; 96W (17i-HM55) 90~264V AC; 12V DC; 150W (17D-GM45)
Power Cord	32000-000002-RS	1	1750mm; European Standard
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

Options

Model	AFL-17D-N270	AFL-17i-HM55	AFL-17D-GM45
Panel Mounting Kit	AFLPK-17D	AFLPK-17B	AFLPK-17D
Wall Mounting Kit	AFLWK-19B		
Rack Mounting Kit	AFLRK-17D-R11	N/A	AFLRK-17D-R11
Arm	ARM-11-RS / ARM-31-RS		
Stand	STAND-A19-RS / STAND-A21-R10 / STAND-210-R11		
OS: Win CE 6.0 (128 MB CF card)	AFLCF-15-N270-CE060-R30	N/A	N/A
OS: Win XPE (1 GB CF card)	AFLCF-15-N270-XPE-R30	AFLSD-15-HM55-2G-XPE-R20 (2GB SATA SSD)	AFLCF-W15-GM45-XPE-R30
OS: LINUX (2 GB CF card)	AFLCF-15-N270-LNX-R30	N/A	AFLCF-W15-GM45-LNX-R30
OS: Win 7 Embedded (4GB CF card)	AFLCF-15-N270-WES7E-R30	AFLSD-15-HM55-4G-WES7E-R20 (4GB SATA SSD)	AFLCF-W15-GM45-WES7E-R30
Hybrid Card Reader	N/A	AFLP-17BMSI-U	N/A
Magnetic Stripe Reader	N/A	AFLP-17BMSR-U	N/A
DC 12V Input UPS	AUPS-B10-R10 (VESA 100, DC 12V input, 12V output 100W UPS module with 3800mAH)		
DC 9~36V Input UPS	AUPS-B20-R10 (VESA 100, DC 9~36V input, 12V output 100W UPS module with 3800mAH)		
Bluetooth V2.0+EDR	AFL-BT-KIT04-R10	AFL-BT-KIT01-R10	AFL-BT-KIT03-R10

Note: Win CE application without digital microphone function

19" SXGA AFOLUX Panel PC

AFL-19i(E)-HM55

Intel® Core™ i7/i5/i3/Celeron® Processor

New HM55 Platform Features:

- Powered by high performance 2.66 GHz Intel® Core™ i7-620M CPU with Intel® HM55 chipset
- 1066MHz DDR3 system memory up to 4GB
- HDMI port delivers high image quality on the second display
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (over 4GB storage capacity is suggested)

Specifications

Model	AFL-19i-HM55
LCD Size	19"
Max Resolution	1280 x 1024
Brightness (cd/m²)	350
Contrast Ratio	1000 : 1
LCD Color	16.7M
Pixel Pitch (mm)	0.294 (H) x 0.294 (V)
Viewing Angle (H-V)	170° / 160°
Backlight MTBF	50000 hrs (LED backlighting)
SBC Model	AFLMB2-HM55-R10
CPU	Intel® Core™ i7/i5/i3/Celeron® Processor
Chipset	Intel® HM55
RAM	Two 204-pin 800/1066MHz DDR3 dual-channel SO-DIMMs supported (Max. 8GB)
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM Port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Audio Port (Line-out) 1 x VGA 1 x Power Jack 1 x HDMI Port
Storage	SATA SSD
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Audio	AMP 3W + 3W (internal speakers)
Wireless Connection	1 x Wireless LAN 802.11b/g/n Module (internal PCIe Mini card interface)
Drive Bay	1 x 2.5" SATA HDD bay
Construction Front Panel	ABS + PC Plastic front frame
Membrane Keypad	OSD Keypad below the Front Panel (5 keys)
LED Function	1 x Power on/off LED on front panel
Mounting	Panel, Wall, Stand and Arm VESA 100mm x 100mm
Front Panel Color	Sliver (877U) & Gray (ABSA2037)
Dimensions (WxHxD) (mm)	470 x 383 x 72
Operation Temperature (°C)	0°C~50°C
Storage Temperature (°C)	-20°C ~60°C
N/G Weight	6.2Kg
IP Level	Front Frame IP64
Touch Screen	Resistive Type 5-Wire (Touch controller IC is on board)
Power Adapter	P/N: 63000-FSP096AHB-RS 96W Power Adapter Input: 90VAC~264VAC, 50 / 60 Hz Output: 12VDC
Power Requirement	12VDC
Power Consumption	88W (Intel® T7500, 2GB memory, 80G HDD)

Fully Integrated I/O

- **AFL-19i-HM55**

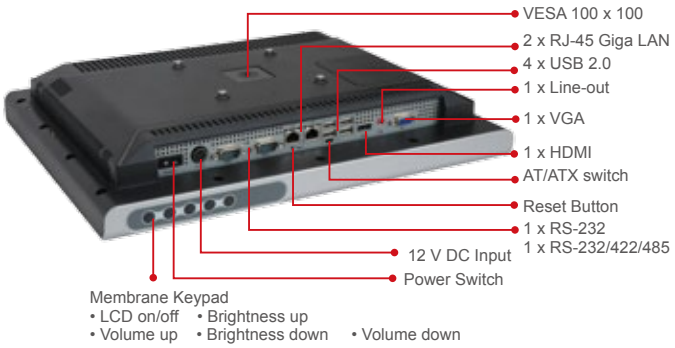

AFL-19i Dimensions (Unit: mm)

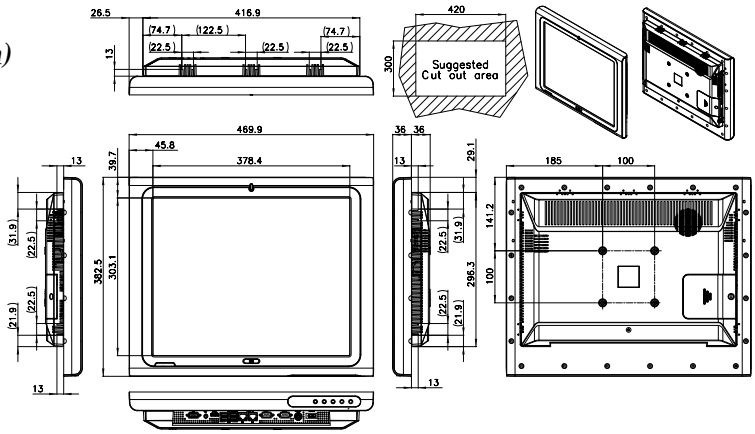

Ordering Information

Part Number	Description
AFL-19i-HM55-P45/R/1G-R20	19" 350cd/m² SXGA LED backlighting panel PC with Intel® Celeron® P4500 1.86G CPU, 1GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R20
AFL-19i-HM55i3-35/R/2G-R20	19" 350cd/m² SXGA LED backlighting panel PC with Intel® Core™ i3-350M 2.26G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R20
AFL-19i-HM55i5-52/R/2G-R20	19" 350cd/m² SXGA LED backlighting panel PC with Intel® Core™ i5-520M 2.4G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R20
AFL-19i-HM55i7-62/R/2G-R20	19" 350cd/m² SXGA LED backlighting panel PC with Intel® Core™ i7-620M 2.66G CPU, 2GB DDR3 RAM, 802.11b/g/n wireless module, touch screen, R20

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3;5mm
Power Adpater	63000-FSP096AHB-RS	1	90~264V AC; 12V DC; 96W (19i-HM55)
Power Cord	32000-000002-RS	1	1750mm; European Standard
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

ISMM Supported Functions

	Voltage	Fan	Smart Fan	Temperature	WDT	Cash Drawer
AFL-19i-HM55	V	V	V	V	V	

Options

Model	AFL-19i-HM55
Panel Mounting Kit	AFLPK-19B
Wall Mounting Kit	AFLWK-19B
Arm	ARM-11-RS / ARM-31-RS
Stand	STAND-A19-RS / STAND-A21-R10 / STAND-210-R11
OS: Win XPE (1 GB CF card)	AFLSD-15-HM55-2G-XPE-R20(2GB SATA SSD)
OS: Win 7 Embedded	AFLSD-15-HM55-4G-WES7E-R20 (4GB SATA SSD)
Hybrid Card Reader	AFLP-19AMSI-U
Magnetic Stripe Reader	AFLP-19MSR-U
DC 12V Input UPS	AUPS-B10-R10 (VESA 100, DC 12V input, 12V output 100W UPS module with 3800mAH)
DC 9~36V Input UPS	AUPS-B20-R10 (VESA 100, DC 9~36V input, 12V output 100W UPS module with 3800mAH)
Bluetooth V2.0+EDR	AFL-BT-KIT01-R10

19" Wide 1440 x 900 AFOLUX Panel PC

AFL-W19A-N270

Intel® Atom™ N270 1.6GHz Processor

Mirror Black Glossy Finish

Features

- 19” wide screen all-in-one system with resistive touch panel
- High quality wide screen panel featuring 16:10 aspect ratio, high contrast and fast response time
- Fanless system integrated with Intel® Atom™ N270 1.6G processor for ultra low voltage
- IEEE 802.11b/g/n Wi-Fi connection
- Built-in two speakers
- Built-in capitalize technology
- Ambient light sensor detects ambient light for automated screen adjustments
- VESA-mountable for flexibility in mounting and deployment
- iSMM system utility included for system settings
- Support Windows® CE, Windows® XP Embedded and Linux (optional)
- IP 64 compliant front panel
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery (suggest over 4GB storage capacity)

Specifications

Model	AFL-W19A-N270
LCD Size	19"
Max Resolution	1440 x 900
Brightness (cd/m²)	250
Contrast Ratio	1000:1
LCD Color	16.7M
Pixel Pitch (mm)	0.2835 (H) x 0.2835 (V)
Viewing Angle (H-V)	170° / 160°
Backlight MTBF	30000 hrs (LED backlight)
SBC Model	AFLMB2-945GSE-N270-R10
CPU	Intel® Atom™ N270 1.6GHz CPU
Chipset	Intel® 945GSE + ICH7M
RAM	Supports one 400MHz or 533MHz DDR2 SO-DIMM (Max. 2GB)
I/O Ports	1 x RS-232 COM Port 1 x RS-232/422/485 COM port 2 x RJ-45 for Giga LAN 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x Audio Port 1 x VGA Port 1 x Power Jack
Storage	CF Type II
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Audio	AMP 1.5W + 1.5W (internal speakers)
Camera Module	300K pixel camera (with low light function) and digital microphone
Wireless Connection	1 x Wireless LAN 802.11b/g/n module (internal PCIe Mini card interface)
Drive Bay	1 x 2.5" SATA HDD bay
Construction Front Panel	ABS + PC Plastic front frame
Membrane Keypad	LCD On/Off, Brightness Down/Up, Volume Down/Up, Lock, Ambient Light Sensor On/Off (7 keys)
Ambient Light Sensor	Yes
Infrared Remote Control	LCD On/Off, Brightness Up/Down, Volume Up/Down, System On/Off, Ambient Light Sensor On/Off
Mounting	Panel, Wall, Stand and Arm VESA 100mm x 100mm
Front Panel Color	Black C
Dimensions (WxHxD) (mm)	475 x 259 x 65
Operation Temperature (°C)	0°C ~40°C with HDD -10°C ~50°C with CF Card or SATA interface 2.5" SSD HDD
Storage Temperature (°C)	-20°C ~60°C
N/G Weight	5.8 Kg
IP Level	IP 64 compliant front panel
Safety & EMC	CE / FCC
Touch Screen	5-wire resistive type (touch controller IC is on board)
Power Adapter	P/N: 63000-FSP084DMBA1308-RS 84W Power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
Power Requirement	12VDC
Power Consumption	55W

Membrane Keypad for System Function Control

Ambient Light Sensor

2mega pixel Camera (with Low Light Function) and Digital Microphone

Infrared Remote Control (For AFL-W19A Series Only)

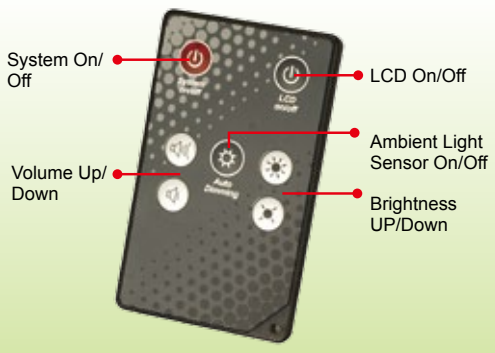

Fully Integrated I/O

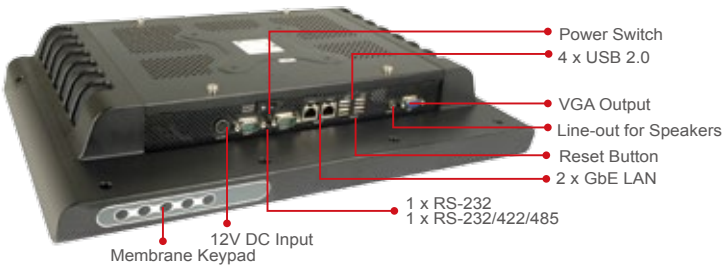

AFL-W19A Dimensions (Unit: mm)

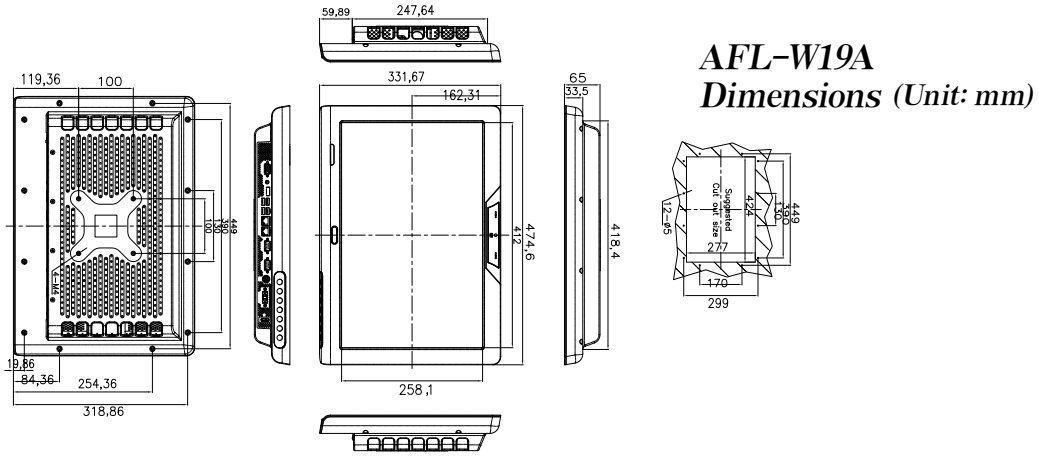

Ordering Information

Part Number	Description
AFL-W19A-N270/R/1G-R30	19" 250cd/m² 1440x900 LED backlighting panel PC with Intel® Atom™ N270 1.6GHz CPU, 1GB DDR2 RAM, 802.11b/g/n wireless module, touch screen, 2-megapixel camera, microphone, R30

Packing List

Item	Part Number	Q'ty	Specification
Screw Pack	44013-030041-RS	4	M3;5mm
Power Adpater	63000-FSP084DMBA1308-RS 63000-FSP150AHAN1808-RS	1	90~264V AC; 12V DC; 84W (W19A/B-N270) 90~264V AC; 12V DC; 150W (W19A/B-GM45)
Power Cord	32000-000002-RS	1	1750mm; (EU or US, depending on the shipment country)
Utility CD	7B000-000087-RS	1	
Touch Pen	43125-0002C0-00-RS	1	
One Key Recovery CD		1	

ISMM Supported Functions

	Voltage	Fan	Smart Fan	Temperature	WDT	Cash Drawer
AFL-W19A- N270	V			V	V	

Options

Model	AFL-W19A-N270
Panel Mounting Kit	AFLPK-W19B
Wall Mounting Kit	AFLWK-19B
Arm	ARM-11-RS / ARM-31-RS
Stand	STAND-A19-RS / STAND-A21-R10 / STAND-210-R11
OS: Win CE 6.0 (128 MB CF card)	AFLCF-15-N270-CE060-R30
OS: Win XPE (1 GB CF card)	AFLCF-15-N270-XPE-R30
OS: LINUX (2 GB CF card)	AFLCF-15-N270-LNX-R30
OS: Win 7 Embedded (4GB CF card)	AFLCF-15-N270-WES7E-R30
DC 12V Input UPS	AUPS-B10-R10 (VESA 100, DC 12V input, 12V output 100W UPS module with 3800mAH)
DC 9~36V Input UPS	AUPS-B20-R10 (VESA 100, DC 9~36V input, 12V output 100W UPS module with 3800mAH)
Bluetooth V2.0+EDR	AFL-BT-KIT04-R10

Note: Win CE application without digital microphone function